



SICK Sensor Intelligence.

**MINIATURE PHOTOELECTRIC SENSORS** 

MINIATURE PHOTOELECTRIC SENSORS



## Ordering information

Туре	Part no.
WTV4FE-1H161120A00	1113187

Other models and accessories -> www.sick.com/W4



## Detailed technical data

#### Features

Functional principle	Photoelectric proximity sensor
Functional principle detail	Background suppression, V-optics
Sensing range	
Sensing range min.	2 mm
Sensing range max.	50 mm
Adjustable switching threshold for background suppression	15 mm 50 mm
Reference object	Object with 90% remission factor (complies with standard white according to DIN 5033)
Minimum distance between set sensing range and background (black 6% / white 90%)	1 mm, at a distance of 21 mm
Recommended sensing range for the best per- formance	15 mm 30 mm
Emitted beam	
Light source	PinPoint LED
Type of light	Visible red light
Shape of light spot	Rectangular
Light spot size (distance)	0.5 mm x 1.9 mm (30 mm)
Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle)	< +/- 1.5° (at Ta = +23 °C)

## MINIATURE PHOTOELECTRIC SENSORS

Key LED figures	
Normative reference	EN 62471:2008-09   IEC 62471:2006, modified
LED risk group marking	Free group
Wave length	635 nm
Average service life	100,000 h at T <sub>a</sub> = +25 °C
Smallest detectable object (MDO) typ.	
	0.1~mm (At 30 mm distance (object with 90% remission (complies with standard white according to DIN 5033)))
Adjustment	
Teach-Turn adjustment	BluePilot: For setting the sensing range
IO-Link	For configuring the sensor parameters and Smart Task functions
Indication	
LED blue	BluePilot: sensing range indicator
LED green	Operating indicator Static on: power on Flashing: IO-Link mode
LED yellow	Status of received light beam Static on: object present Static off: object not present
Special applications	Detecting transparent objects

## Safety-related parameters

MTTF <sub>D</sub>	661 years
DC <sub>avg</sub>	0 %
T <sub>M</sub> (mission time)	20 years (EN ISO 13849, rate of use: 60 %)

## Communication interface

IO-Link	✓, IO-Link V1.1
Data transmission rate	COM2 (38,4 kBaud)
Cycle time	2.3 ms
Process data length	16 Bit
Process data structure	Bit 0 = switching signal $Q_{L1}$ Bit 1 = switching signal $Q_{L2}$ Bit 2 15 = Current receiver level (live)
VendorID	26
DeviceID HEX	0x80024E
DeviceID DEC	8389198
Compatible master port type	A
SIO mode support	Yes

### Electrical data

Supply voltage U <sub>B</sub>	10 V DC 30 V DC <sup>1)</sup>
Ripple	≤ 5 V <sub>pp</sub>
Usage category	DC-12 (According to EN 60947-5-2)

<sup>1)</sup> Limit values.

<sup>2)</sup> Signal transit time with resistive load in switching mode.

<sup>3)</sup> With light/dark ratio 1:1.

<sup>4)</sup> This switching output must not be connected to another output.

MINIATURE PHOTOELECTRIC SENSORS

Current consumption= 25 mA, without load AU Ug = 24 VProtection classIIProtection classIIDigital output= 20 compensation (Compensation		
Protection classIIDigital outputDigital outputNume2 (Complementary)Posh-pull: PNP/NPNPush-pull: PNP/NPNSwitching modIght/dark switchingSignal voltage PNP HIGH/U0Aprox. Ug-2.5 V 0 VSignal voltage NPN HIGH/U0Aprox. Ug-2.5 VOutput current nmaCircuit protection outputReverse polarity protected overcurrent protected overcurrent protected Short-circuit protected Sho		DC-13 (According to EN 60947-5-2)
Digital outputComponenties of the second of the	Current consumption	$\leq$ 25 mA, without load. At U <sub>B</sub> = 24 V
Number2 (complementary)Yubpsh-pull: PNP/NPNSwitching modeipit/dark switchingSwitching poleipit/dark switchingSignal voltage PNP HIGH/UWAprox. Ug- 2.5 VOutput current matei 200 mACircuit protection outputi 200 mACircuit protection outputi 200 mAResponse timei 200 mARepeatability (response)i 200 mANumberi 200 mAPindende matei 200 mARepeatability (response)i 200 mABay and a sponse timei 200 mABay and a sponse time output and an and a sponse time output and an a	Protection class	III
Number     Push-puli: PNP/NPN       Switching mode     Light/dark switching       Signal voltage PNP HIGH/LOW     Approx. U <sub>B</sub> 2.5 V/0 V       Signal voltage NPN HIGH/LOW     Approx. U <sub>B</sub> 2.5 V/0 V       Output current I <sub>max</sub> ≤ 100 mA       Circuit protection output     Reverse polarity protected Short-circuit protected Short-circuit protected       Switching frequence     ≤ 500 µs       Repeatability (response time Switching frequence)     ≥ 500 µs       Joon Hz     3       Pin/Wire assignment     > 100 mJ 3       Function of pin 4/black (BK) – detail     Digital output, light switching, object present → output Q <sub>L1</sub> HIGH; IO-Link communication C <sup>4</sup> Function of pin 2/white (W)     Digital output, dark switching, object present → output Q <sub>L1</sub> LOW <sup>4</sup>	Digital output	
Switching modeLight/dark switchingSignal voltage PNP HIGH/LOWApprox. U <sub>B</sub> -2.5 V/0 VSignal voltage NPN HIGH/LOWApprox. U <sub>B</sub> /<2.5 VOutput current I <sub>max</sub> ≤ 100 mACircuit protection outputReverse polarity protected Overcurrent protected Short-circuit protected Short-circuit protected Short-circuit protected Short-circuit protected Short-circuit protected Short-circuit protected Short-circuit protected Short-circuit protected 	Number	2 (Complementary)
Signal voltage PNP HIGH/LOWApprox. U <sub>B</sub> -2.5 V/0 VSignal voltage NPN HIGH/LOWApprox. U <sub>B</sub> -2.5 VOutput current I <sub>max</sub> ≤ 100 mACircuit protection outputsReverse polarity protected Overcurrent protected Short-circuit protectedResponse time≤ 500 µsRepeatability (response time)150 µs <sup>2)</sup> Switching frequency1,000 Hz <sup>3</sup> )Pin/Wire assignmentUFunction of pin 4/black (BK)Digital output, light switching, object present → output Q <sub>L1</sub> HIGH; IO-Link communication C <sup>4</sup> ) Digital output, dark switching, object present → output Q <sub>L1</sub> LOW <sup>4</sup> )	Туре	Push-pull: PNP/NPN
NumberSignal voltage NPN HIGH/LOWApprox. U <sub>B</sub> / < 2.5 VOutput current I <sub>max</sub> < 100 mACircuit protection outputReverse polarity protected Overcurrent protected Short-circuit prot	Switching mode	Light/dark switching
Output current Imax.≤ 100 mACircuit protection outputsReverse polarity protected Overcurrent protected Short-circuit protected Short-circuit protected Short-circuit protected Short-circuit protected 150 μs 2)Repeatability (response time Switching frequency≤ 500 μsInvolution of pin 4/black (BK)Output 3)Pin/Wire assignmentDigital output, light switching, object present → output QL1 HIGH; IO-Link communication C 4)Function of pin 4/black (BK) - detail Function of pin 2/white (WH)Digital output, dark switching, object present → output QL1 LOW 4)	Signal voltage PNP HIGH/LOW	Approx. U <sub>B</sub> -2.5 V / 0 V
Circuit protection outputsReverse polarity protected Svercurrent protected Short-circuit protected Short-	Signal voltage NPN HIGH/LOW	Approx. $U_B / < 2.5 V$
Overcurrent protected Short-circuit protectedResponse time≤ 500 μsRepeatability (response time)150 μs ²)Switching frequency1,000 Hz ³)Pin/Wire assignmentUFunction of pin 4/black (BK)Digital output, light switching, object present → output QL1 HIGH; IO-Link communication C <sup>4</sup> )Function of pin 2/white (WH)Digital output, dark switching, object present → output QL1 LOW <sup>4</sup> )	Output current I <sub>max.</sub>	≤ 100 mA
Repeatability (response time) $150 \ \mu s^2$ Switching frequence $150 \ \mu s^2$ Pin/Wire assignment $1,000 \ Hz^3$ Function of pin 4/black (BK)Digital output, light switching, object present $\rightarrow$ output Q <sub>L1</sub> HIGH; IO-Link communication C <sup>4</sup> )Function of pin 2/white (WH)Digital output, dark switching, object present $\rightarrow$ output $\bar{Q}_{L1}$ LOW <sup>4</sup> )	Circuit protection outputs	Overcurrent protected
Switching frequency       1,000 Hz <sup>3</sup> )         Pin/Wire assignment       inplace         Function of pin 4/black (BK)       Digital output, light switching, object present → output Q <sub>L1</sub> HIGH; IO-Link communication C <sup>4</sup> )         Function of pin 4/black (BK) – detail       The pin 4 function of the sensor can be configured, Additional possible settings via IO-Link         Function of pin 2/white (WH)       Digital output, dark switching, object present → output Q <sub>L1</sub> LOW <sup>4</sup> )	Response time	≤ 500 µs
Pin/Wire assignment       Digital output, light switching, object present → output Q <sub>L1</sub> HIGH; IO-Link communication C <sup>4)</sup> Function of pin 4/black (BK) – detail       Digital output, light switching, object present → output Q <sub>L1</sub> HIGH; IO-Link communication C <sup>4)</sup> Function of pin 2/white (WH)       Digital output, dark switching, object present → output Q <sub>L1</sub> LOW <sup>4)</sup>	Repeatability (response time)	150 μs <sup>2)</sup>
Function of pin 4/black (BK)Digital output, light switching, object present $\rightarrow$ output QL1 HIGH; IO-Link communication C 4)Function of pin 4/black (BK) – detail Function of pin 2/white (WH)The pin 4 function of the sensor can be configured, Additional possible settings via IO-Link Digital output, dark switching, object present $\rightarrow$ output $\bar{Q}_{L1}$ LOW 4)	Switching frequency	1,000 Hz <sup>3)</sup>
Function of pin 4/black (BK) - detailThe pin 4 function of the sensor can be configured, Additional possible settings via IO-LinkFunction of pin 2/white (WH)Digital output, dark switching, object present $\rightarrow$ output $\bar{Q}_{L1}$ LOW 4)	Pin/Wire assignment	
Function of pin 2/white (WH) Digital output, dark switching, object present $\rightarrow$ output $\bar{Q}_{L1}$ LOW <sup>4)</sup>	Function of pin 4/black (BK)	Digital output, light switching, object present $\rightarrow$ output QL1 HIGH; IO-Link communication C $^{4)}$
	Function of pin 4/black (BK) – detail	The pin 4 function of the sensor can be configured, Additional possible settings via IO-Link
Function of pin 2/white (WH) – detail The pin 2 function of the sensor can be configured, Additional possible settings via IO-Link	Function of pin 2/white (WH)	Digital output, dark switching, object present $\rightarrow$ output $\bar{Q}_{L1}$ LOW $^{4)}$
	Function of pin 2/white (WH) – detail	The pin 2 function of the sensor can be configured, Additional possible settings via IO-Link

<sup>1)</sup> Limit values.

<sup>2)</sup> Signal transit time with resistive load in switching mode.

<sup>3)</sup> With light/dark ratio 1:1.

<sup>4)</sup> This switching output must not be connected to another output.

## Mechanical data

Housing	Rectangular
Design detail	Flat
Dimensions (W x H x D)	16 mm x 40.1 mm x 12.1 mm
Connection	Cable, 4-wire, 2 m
Connection detail	
Deep-freeze property	Do not bend below 0 °C
Conductor size	0.14 mm <sup>2</sup>
Cable diameter	Ø 3.4 mm
Length of cable (L)	2 m
Material	
Housing	Plastic, VISTAL®
Front screen	Plastic, PMMA
Cable	Plastic, PVC
Weight	Approx. 30 g
Maximum tightening torque of the fixing screws	0.4 Nm

MINIATURE PHOTOELECTRIC SENSORS

## Ambient data

Enclosure rating	IP66 (EN 60529) IP67 (EN 60529)
Ambient operating temperature	-40 °C +60 °C
Ambient temperature, storage	-40 °C +75 °C
Typ. Ambient light immunity	Artificial light: ≤ 50,000 lx Sunlight: ≤ 50,000 lx
Shock resistance	30 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27))
Vibration resistance	10 Hz 1,000 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))
Air humidity	35 % 95 %, relative humidity (no condensation)
Electromagnetic compatibility (EMC)	EN 60947-5-2
Resistance to cleaning agent	ECOLAB
UL File No.	NRKH.E181493 & NRKH7.E181493

### Smart Task

Smart Task name	Base logics
Logic function	Direct AND OR
Timer function	Deactivated Switch-on delay Off delay ON and OFF delay Impulse (one shot)
Inverter	Yes
Switching frequency	SIO Logic: 900 Hz $^{1)}$ IOL: 800 Hz $^{2)}$
Response time	SIO Logic: 550 $\mu s$ $^{1)}$ IOL: 600 $\mu s$ $^{2)}$
Repeatability	SIO Logic: 200 $\mu$ s <sup>1)</sup> IOL: 250 $\mu$ s <sup>2)</sup>
Switching signal	
Switching signal $Q_{L1}$	Switching output
Switching signal $\bar{Q}_{L1}$	Switching output

 $\overset{(1)}{\rightarrow}$  Use of Smart Task functions without IO-Link communication (SIO mode).

<sup>2)</sup> Use of Smart Task functions with IO-Link communication function.

### Diagnosis

Device temperature	
Measuring range	Very cold, cold, moderate, warm, hot
Device status	Yes
Detailed device status	Yes
Operating hour counter	Yes
Operating hours counter with reset function	Yes
Quality of teach	Yes


MINIATURE PHOTOELECTRIC SENSORS

### Classifications

ECLASS 5.0	27270904
ECLASS 5.1.4	27270904
ECLASS 6.0	27270904
ECLASS 6.2	27270904
ECLASS 7.0	27270904
ECLASS 8.0	27270904
ECLASS 8.1	27270904
ECLASS 9.0	27270904
ECLASS 10.0	27270904
ECLASS 11.0	27270904
ECLASS 12.0	27270903
ETIM 5.0	EC002719
ETIM 6.0	EC002719
ETIM 7.0	EC002719
ETIM 8.0	EC002719
UNSPSC 16.0901	39121528

## Adjustments

Display and adjustment elements




① LED blue

- ② Teach-Turn adjustment③ LED yellow
- ④ LED green


#### Installation note

Angle of acceptance, pane of glass in front of background,  $\beta$ 

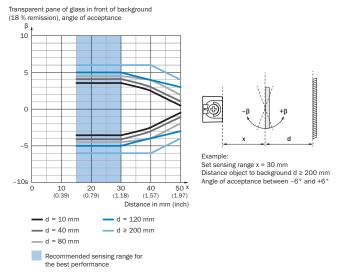


Angle of acceptance, pane of glass in front of background,  $\boldsymbol{\alpha}$ 

Transparent pane of glass in front of background (18 % remission), angle of acceptance

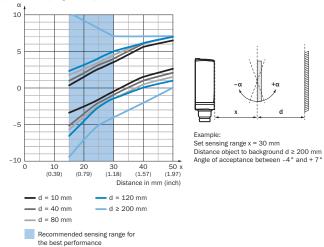


#### Angle of acceptance, on high-glossy object, $\beta$

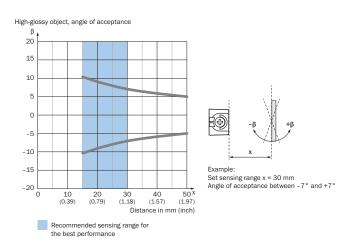

MINIATURE PHOTOELECTRIC SENSORS


#### Angle of acceptance, on high-glossy object, a

High-glossy object, angle of acceptance

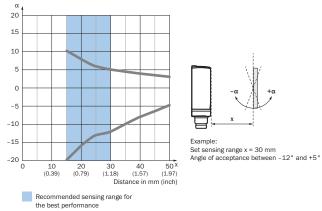


## Connection type

Cable, 4-wire




## **Connection diagram**

Cd-491




## Truth table

Push-pull: PNP/NPN – dark switching  $\bar{Q}$ 

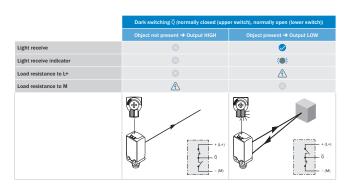


MINIATURE PHOTOELECTRIC SENSORS

#### Push-pull: PNP/NPN - light switching Q

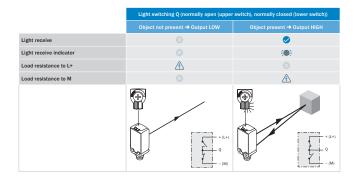

## Characteristic curve



Example: Safe suppression of the background White background (90 %)


Black object (6 % remission) Set sensing range x = 20 mm Needed minimum distance to white background y = 1.2 mm

the best performance

- ① Ultra-black object, 1% remission factor
- Black object, 6% remission factor 2
- ③ Gray object, 18% remission factor
- ④ White object, 90% remission factor


## Light spot size

#### Vertical

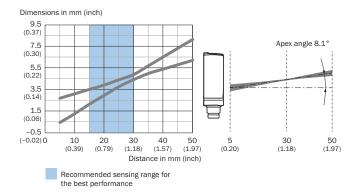


MINIATURE PHOTOELECTRIC SENSORS

#### Horizontal

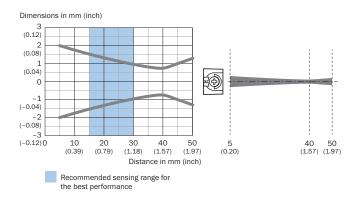


### Sensing range diagram

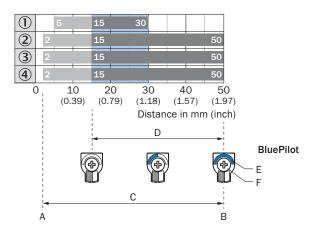

- A = Sensing range min. in mm
- B = Sensing range max. in mm
- C = Viewing range
- D = Adjustable switching threshold for background suppression
- E = Sensing range indicator
- F = Teach-Turn adjustment
- Recommended sensing range for the best performance
- ① Ultra-black object, 1% remission factor
- ② Black object, 6% remission factor
- ③ Gray object, 18% remission factor
- ④ White object, 90% remission factor

MINIATURE PHOTOELECTRIC SENSORS

### Dimensional drawing (Dimensions in mm (inch))

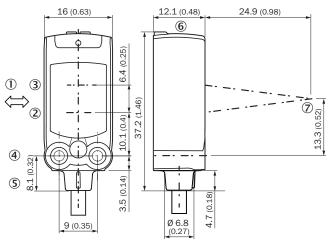

- 1 Standard direction of the material being detected
- ② Center of optical axis, sender
- ③ Center of optical axis, receiver
- ④ M3 mounting hole
- ⑤ Connection
- ⑥ Display and adjustment elements
- ⑦ Focus

## **Recommended accessories**

Other models and accessories → www.sick.com/W4

	Brief description	Туре	Part no.
Mounting brackets and plates			
1	Mounting bracket for wall mounting, Stainless steel 1.4571, mounting hardware included	BEF-W4-A	2051628
Others			
٠.	<ul> <li>Connection type head A: Male connector, M12, 4-pin, straight, A-coded</li> <li>Description: Unshielded</li> <li>Connection systems: Screw-type terminals</li> <li>Permitted cross-section: &lt; 0.75 mm<sup>2</sup></li> </ul>	STE-1204-G	6009932

# SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com



Online data sheet

