
**1020100000** 2024-06-10

- · fine thread
- · Piston rod: external thread
- · Single-acting, retracted without pressure

## **AVENTICS Series 102 Diaphragm type** cylinder

The AVENTICS Series 102 is cost-efficient solution to generate high forces for press application for example.





#### Technical data

 $\begin{array}{ccc} \text{Industry} & \text{Industrial} \\ \text{Piston } \varnothing & 80 \text{ mm} \\ \text{Stroke} & 40 \text{ mm} \\ \text{Ports} & \text{G 1/4} \\ \end{array}$ 

Functional principle Single-acting, retracted without pressure

Piston rod thread - type External thread
Piston rod thread M12x1,25

Pressure for determining piston forces 6 bar Extracting piston force 3000 N -20 °C Min. ambient temperature 70 °C Max. ambient temperature 2 bar Min. working pressure 8 bar Max. working pressure 100 N Min. spring force 300 N Max. spring force Weight 2.8 kg

Medium Compressed air

Min. medium temperature -20 °C Max. medium temperature 70 °C

1020100000 2024-06-10

Max. particle size  $50 \mu m$ Min. oil content of compressed air  $0 \text{ mg/m}^3$ Max. oil content of compressed air  $5 \text{ mg/m}^3$ 

#### Material

Piston rod Steel, chrome-plated

Seal material Acrylonitrile butadiene rubber

Material, front cover Steel, chrome-plated Cylinder tube Steel, chrome-plated

Part No. 1020100000

#### Technical information

Diaphragm actuator strokes are tolerance-dependent.

Tolerance at 40 mm, 50 mm, 80 mm stroke: ± 3 mm


The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in https://www.emerson.com/en-us/support).

1020100000 2024-06-10

#### **Dimensions**

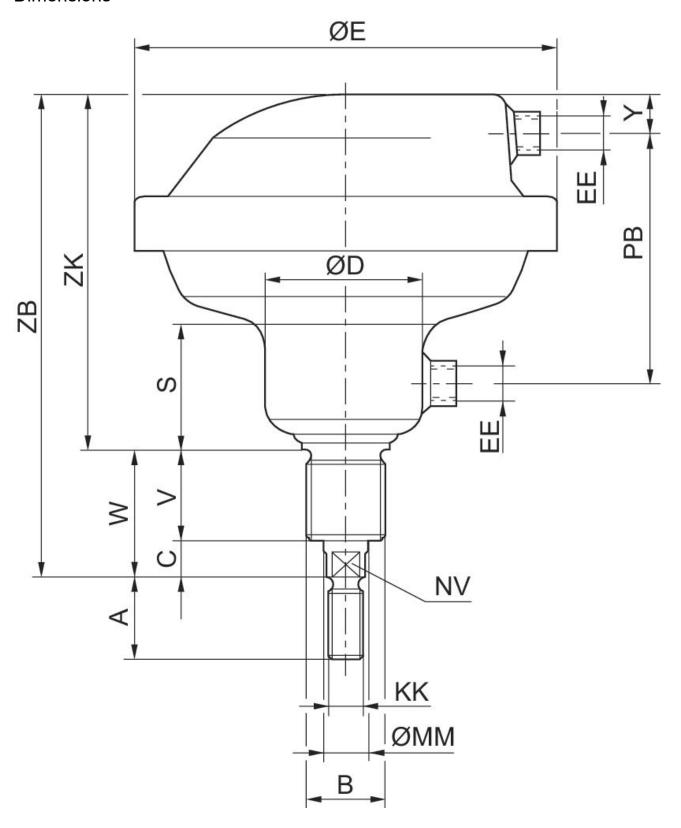


2024-06-10

Part No.	Piston Ø	А	В	С	D	Е	S	V	W
1020100000	80	24	M24x2	14	55	150	48	38	52
1020200000	113	32	M36x3	20	71	195	55	38	58
1020300000	160	40	M36x3	20	88	261	58	45	65

Part No.	Piston Ø	Y	EE	KK	MM	NV	РВ	ZB	ZK
1020100000	80	15	G 1/4	M12x1.25	16	13	90	183	131
1020200000	113	15	G 1/4	M16x1.5	20	17	107	212	154
1020300000	160	26	G1/2	M20x1.5	25	22	117	243	178

1020100000 2024-06-10

## Overview drawing

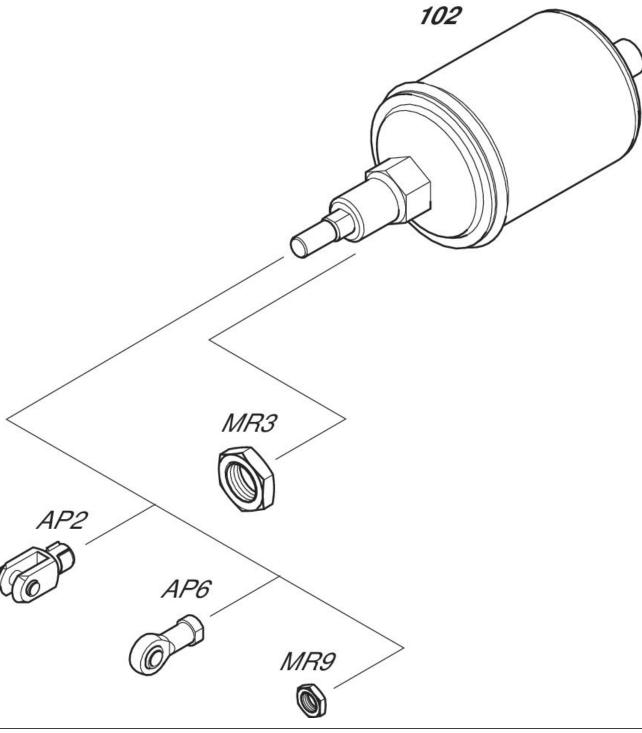

NOTE: This overview drawing is only for orientation to indicate where the various accessory parts can be fastened to the cylinder. The illustration has been simplified for this purpose. It is thus not possible to derive the dimensions from this overview.