
Pressure regulator, Series AS1-RGS-...-DS R412014643

General series information Series AS1

The AVENTICS Series AS1 is a modular, versatile maintenance unit for universal application. This Series offers compact dimensions, is highly efficient, lightweight and easy-to-use. The AVENTICS Series AS guarantees reliability, safety, and efficiency with a simplified assembly and maintenance efforts.





Technical data

Industry Function Parts Pressure gauge Mounting orientation Regulator type Port Nominal flow Qn Regulation range min. Regulation range max. Working pressure min. Industrial Standard pressure regulator Pressure regulator with continuous pressure supply pressure gauge in hand wheel Any Diaphragm-type pressure regulator G 1/4 1000 l/min 0.5 bar 8 bar 0.5 bar



Working pressure max	12 bar
Min. ambient temperature	-10 °C
Max. ambient temperature	50 °C
Air supply	left
Activation	Manual
Regulator function	with relieving air exhaust
Regulator type	Can be assembled into blocks
Pressure supply	double
Lock type	not lockable
with continuous pressure supply	with continuous pressure supply
Medium	Compressed air
	Neutral gases
Weight	0.239 kg

Material


mide
onitrile butadiene styrene
nitrile butadiene rubber
014643
)

Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C. Relieving exhaust (≤ 0.3 bar over set pressure) With rear exhaust (>3 bar) Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar Panel nut included in scope of delivery




Dimensions in mm

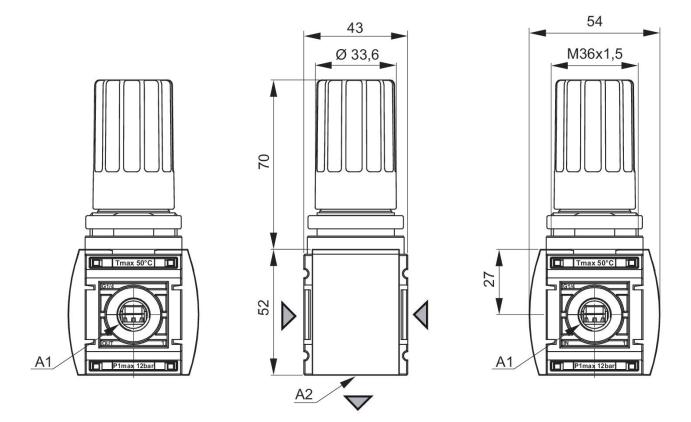

A1 = input A2 = output

A2 = output 1) Pressure gauge connection


Pressure characteristics curve

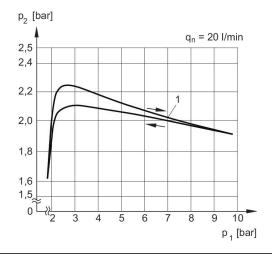

p1 = Working pressure

p2 = Secondary pressure

qn = Nominal flow 1) = Starting point Flow rate characteristic, p2 = 0,05 - 7 bar




p1 = Working pressure

p2 = Secondary pressure qn = Nominal flow




Application example

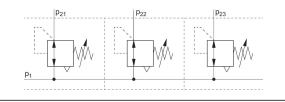

p1 = Working pressure

Accessories overview

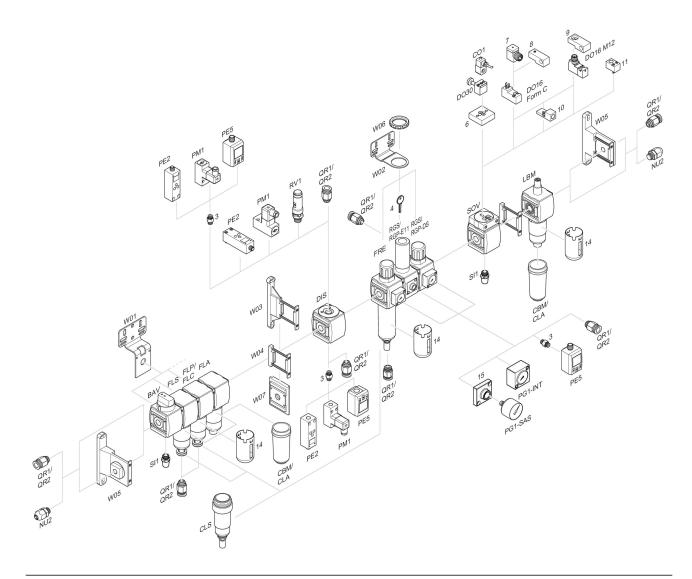

3 = Double nipple 4 = Key for E11 locking 6 = Transition plate DO30 7 = Adapter, Series CON-VP 8 = Mounting aid DO16, form C 9 = Mounting aid DO16, M12 10 = Adapter for external pilot air 11 = Adapter pneumatic operation 14 = Protective guard 15 = Transition plate for assembling a pressure gauge with connection thread G 1/8

