
Pressure regulator, Series AS1-RGS-...-DS

R412014710

General series information Series AS1

■ The AVENTICS Series AS1 is a modular, versatile maintenance unit for universal application. This Series offers compact dimensions, is highly efficient, lightweight and easy-to-use. The AVENTICS Series AS guarantees reliability, safety, and efficiency with a simplified assembly and maintenance efforts.





Technical data

Industry Industrial
Function Standard pressure regulator

Parts Pressure regulator with continuous pressure

supply

With integrated pressure gauge

Any

Diaphragm-type pressure regulator

G 1/4

1000 l/min

0.5 bar

10 bar

0.5 bar

Mounting orientation
Regulator type
Port
Nominal flow Qn

Pressure gauge

Regulation range min.
Regulation range max.
Working pressure min.



Working pressure max

Min. ambient temperature

Max. ambient temperature

50 °C

Air supply

Activation

12 bar

10 °C

70 °C

70 °C

70 Max. ambient temperature

Manual

Regulator function with relieving air exhaust
Regulator type Can be assembled into blocks

Pressure supply double

Lock type not lockable

with continuous pressure supply with continuous pressure supply

Max. pressure gauge Ø in blocked state 40 mm

Medium Compressed air

Neutral gases

Weight 0.209 kg

Material

Housing material Polyamide

Material front plate Acrylonitrile butadiene styrene
Seal material Acrylonitrile butadiene rubber

Part No. R412014710

Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.


Relieving exhaust (≤ 0.3 bar over set pressure)

With rear exhaust (>3 bar)

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar




Dimensions in mm

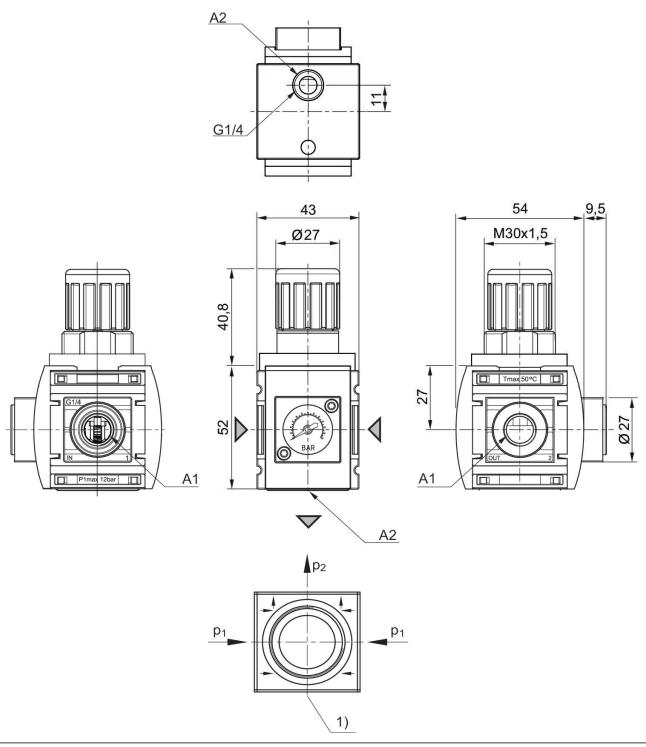

A1 = input A2 = output 1) Pressure gauge connection




Pressure characteristics curve

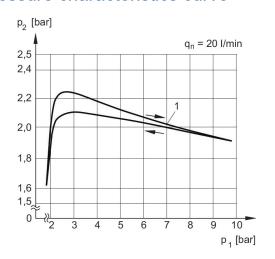

p1 = Working pressure p2 = Secondary pressure qn = Nominal flow

1) = Starting point

Flow rate characteristic, p2 = 0,05 - 7 bar

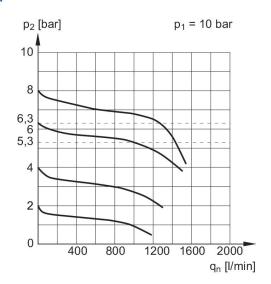


p1 = Working pressure

p2 = Secondary pressure

qn = Nominal flow


Application example



p1 = Working pressure



Accessories overview

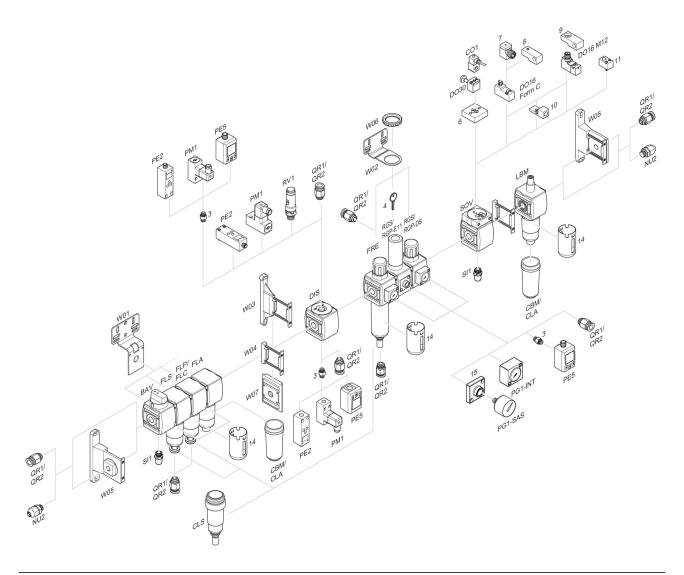

3 = Double nipple 4 = Key for E11 locking 6 = Transition plate DO30 7 = Adapter, Series CON-VP 8 = Mounting aid DO16, form C 9 = Mounting aid DO16, M12 10 = Adapter for external pilot air 11 = Adapter pneumatic operation 14 = Protective guard 15 = Transition plate for assembling a pressure gauge with connection thread G 1/8

