2024-03-19

R412006170

Series AS2

The AVENTICS Series AS2 is a modular, versatile maintenance unit for universal application. This Series offers compact dimensions, is highly efficient, lightweight and easy-to-use. The AVENTICS Series AS guarantees reliability, safety, and efficiency with a simplified assembly and maintenance efforts.





Technical data

Industry Industrial

Function Precision pressure regulator

Parts Precision pressure regulator with continuous

pressure supply

Pressure gauge without pressure gauge

Mounting orientation Any

Regulator type Diaphragm-type pressure regulator

Port G 3/8

Nominal flow Qn

Min. regulation range

Max. regulation range

Min. working pressure

Max. working pressure

Min. ambient temperature

Max. ambient temperature

2700 l/min

0.5 bar

10 bar

16 bar

170 °C

180 °C

Activation Mechanical

Regulator function with relieving air exhaust
Regulator type Can be assembled into blocks

Pressure supply double
Lock type lockable

with continuous pressure supply with continuous pressure supply

Max. internal air consumption q_v 2.6 l/min Max. pressure gauge \varnothing in blocked state 50 mm

Medium Compressed air

2024-03-19

R412006170

Weight Neutral gases

0.248 kg

Material

Housing material Polyamide

Material front plate Acrylonitrile butadiene styrene Seal material Acrylonitrile butadiene rubber

Material threaded bushing Die cast zinc Part No. R412006170

Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.


The rear pressure gauge connection on the pressure regulator is closed with a blanking plug, the front connection is open. Depending on the customer application, a second blanking plug may be necessary. Please order separately (see accessories).

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar

Recommended pre-filter: 5 µm Order pressure gauge separately

2024-03-19


R412006170 Dimensions in mm

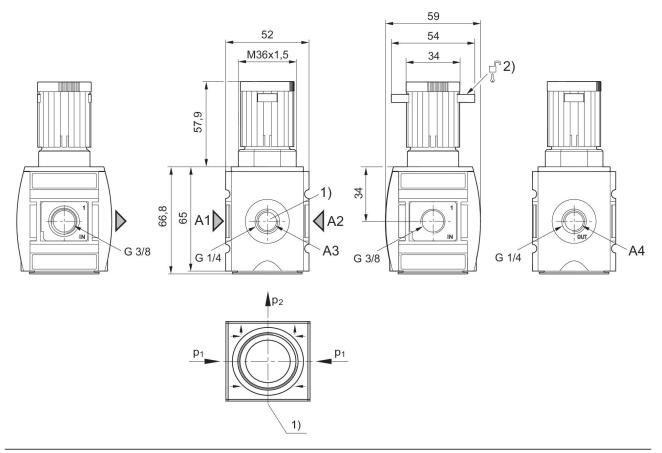


A1 = input
A2 = output
A3 = pressure gauge connection
A4 = output
1) Pressure gauge connection
2) Mounting option for padlocks, max. shackle Ø 8

2024-03-19

R412006170 Pressure characteristics curve




Flow rate characteristic (p2: 0,5 - 8 bar)



p1 = Working pressure p2 = Secondary pressure

qn = Nominal flow

Application example



p1 = Working pressure


p1 = Working pressure

p2 = Secondary pressure

qn = Nominal flow

2024-03-19

R412006170 Accessories overview

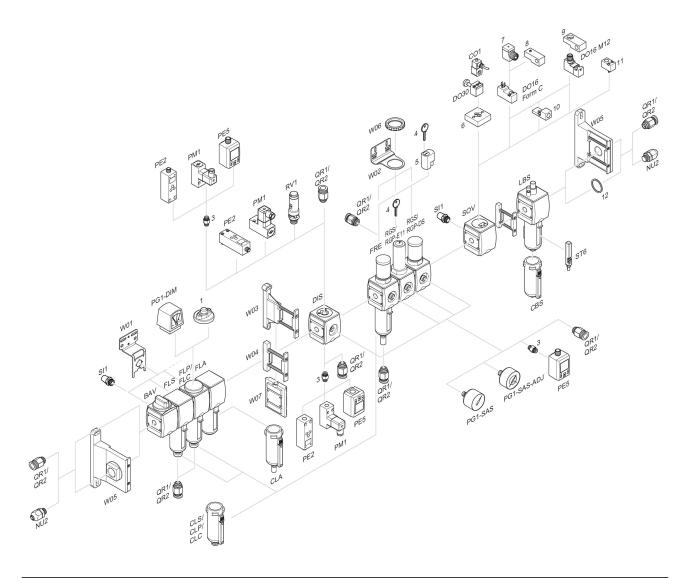

^{1 =} contamination display 3 = Double nipple 4 = Key for E11 locking 5 = mortise lock 6 = Transition plate DO30 7 = Adapter, Series CON-VP 8 = Mounting aid DO16, form C 9 = Mounting aid DO16, M12 10 = Adapter for external pilot air 11 = Adapter pneumatic operation 12 = Sealing ring