


Filling valve, Series AS5-SSV

R412009272

General series information Series AS5

- The AVENTICS Series AS5 is a modular, versatile maintenance unit for universal application. This Series offers compact dimensions, is highly efficient, lightweight and easy-to-use. The AVENTICS Series AS guarantees reliability, safety, and efficiency with a simplified assembly and maintenance efforts.



Technical data

Industry
Industrial

Activation
Pneumatically

Parts
Filling valve

Nominal flow Qn
10000 l/min

Compressed air connection
G 3/4

Working pressure min.
2.5 bar

Working pressure max
16 bar

Sealing principle
Soft Seal

Type
Poppet valve

Can be assembled into blocks
Can be assembled into blocks

Min. ambient temperature
-10 °C

Max. ambient temperature
50 °C

Medium
Compressed air
Neutral gases

Max. particle size
40 µm

Weight
0.43 kg

Material

Housing material
Polyamide

Seal material
Acrylonitrile butadiene rubber

Material, front cover
Acrylonitrile butadiene styrene

Material threaded bushing
Die cast zinc

Part No.
R412009272

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Nominal flow Q_n with secondary pressure $p_2 = 6$ bar at $\Delta p = 1$ bar

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.


The filling valve builds up pressure slowly in the pneumatic systems, i.e. prevents a sudden pressure build-up during a recommissioning after a mains pressure failure or avoids emergency OFF switching. This allows dangerous abrupt cylinder motions to be avoided.

Do not position filling valves or filling units upstream of open consumers, such as nozzles, air barriers, air curtains, since these may prevent through connection of components.

adjustable filling time

With adjustment screw lock

Dimensions

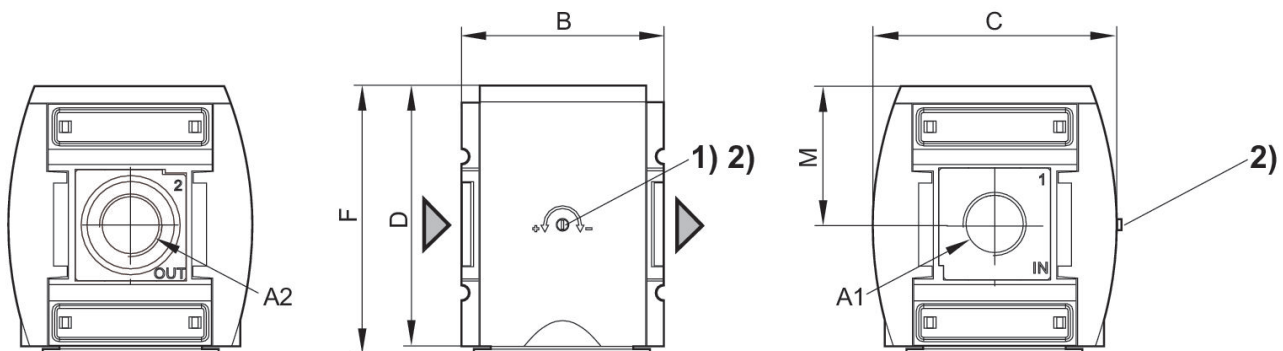


A1 = input A2 = output
1) Adjustment screw for filling time
2) Adjustment screw lock

Dimensions in mm


Part No. G 3/4	A1	A2	B	C	D	F	M
R412009272	G 3/4	G 3/4	85	103	109	112	58
R412009273	G 1	G 1	85	103	109	112	58
R412009275	G 1	G 1	85	103	109	112	58

Secondary pressure while filling

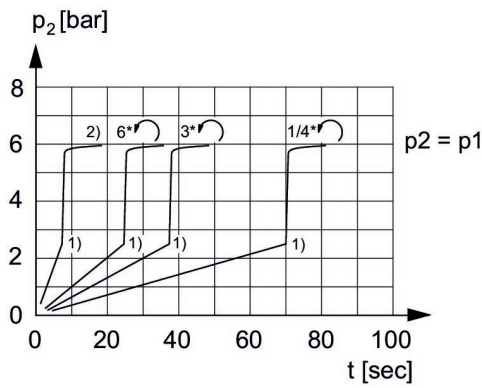


- p1 = Working pressure
- p2 = Secondary pressure
- t = filling time, adjustable via adjustment screw (throttle)
- 1) Switching point: adjustable filling time, fixed change-over pressure $\approx 0.5 \times p1$ (50%)
- 2) Throttle fully opened
- * Adjustment screw rotations

Flow rate characteristic, $p2 = 0,05 - 7$ bar

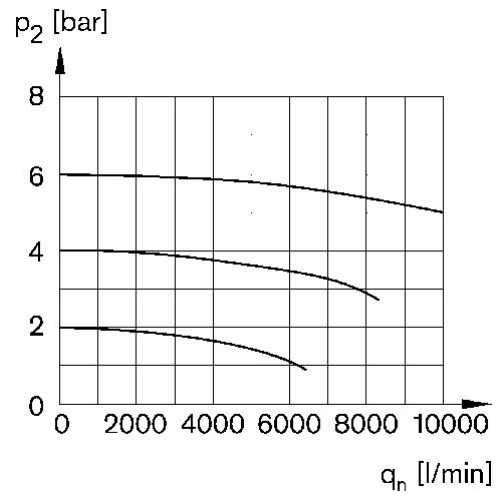

$p2$ = secondary pressure q_n = nominal flow

Accessories overview

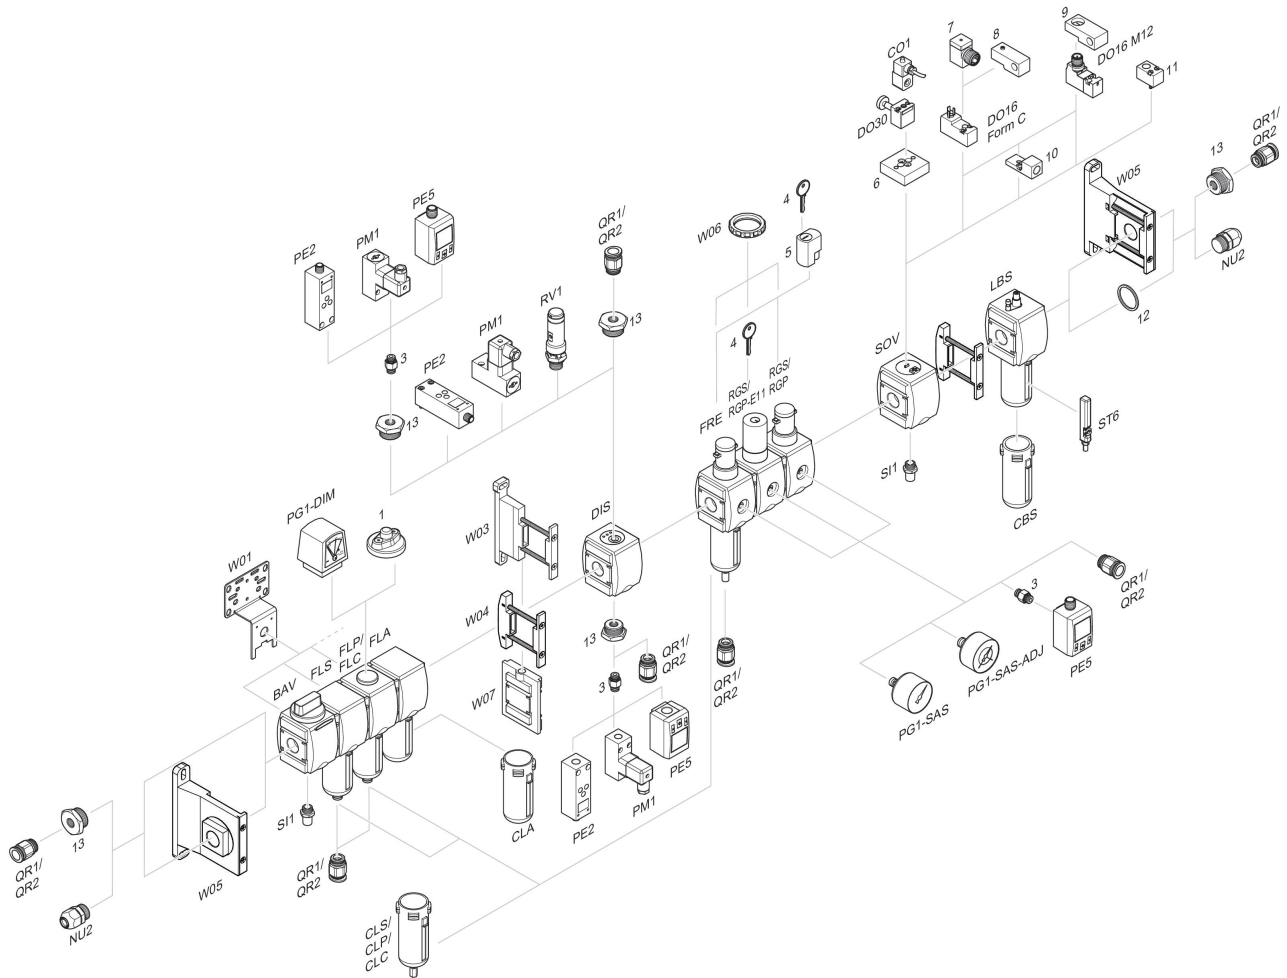

1 = contamination display 3 = Double nipple 4 = Key for E11 locking 5 = mortise lock 6 = Transition plate DO30 7 = Adapter, Series CON-VP 8 = Mounting aid DO16, form C 9 = Mounting aid DO16, M12 10 = Adapter for external pilot air 11 = Adapter pneumatic operation 12 = Sealing ring 13 = Reducing nipple