


3/2-directional valve, Series CD07

5634411100

AVENTICS Series CD07 Directional valves

- $Q_n = 1200 \dots 1400 \text{ l/min}$

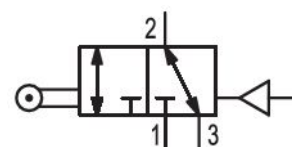

Technical data

Industry

Activation

Frame size

Valve type

Switching principle

Valve function

Actuating control

Plate connection

Actuating element

Sealing principle

Industrial

Mechanical

CD07

Spool valve, positive overlapping

3/2, double solenoid

NC/NO

Single Air Pilot

Pipe connection

Roller

soft seal

Compressed air connection

Compressed air connection type

Compressed air connection input

Compressed air connection output

G 1/4

Internal thread

G 1/4

G 1/4

Compressed air connection, exhaust	G 1/4
Compressed air connection pilot input	G 1/8
Nominal flow Qn	1400 l/min
Working pressure min.	-0.95 bar
Working pressure max.	10 bar
Control pressure min.	2 bar
Control pressure max.	10 bar
actuating force min.	40 N
Certificates	Suitable for ATEX
ATEX	Suitable for ATEX
Min. ambient temperature	-25 °C
Max. ambient temperature	80 °C
Min. medium temperature	-25 °C
Max. medium temperature	80 °C
Medium	Compressed air
Oil content of compressed air min.	0 mg/m ³
Oil content of compressed air max.	1 mg/m ³
Max. particle size	5 µm
Weight	0.5 kg

Material

Housing material	Die cast zinc
Material actuating control	Stainless Steel
Part No.	5634411100

Technical information

option valve: The input and output compressed air connections can be exchanged. The valve can thereby be used in the NC or NO operating mode.

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!


The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

Fig. 4

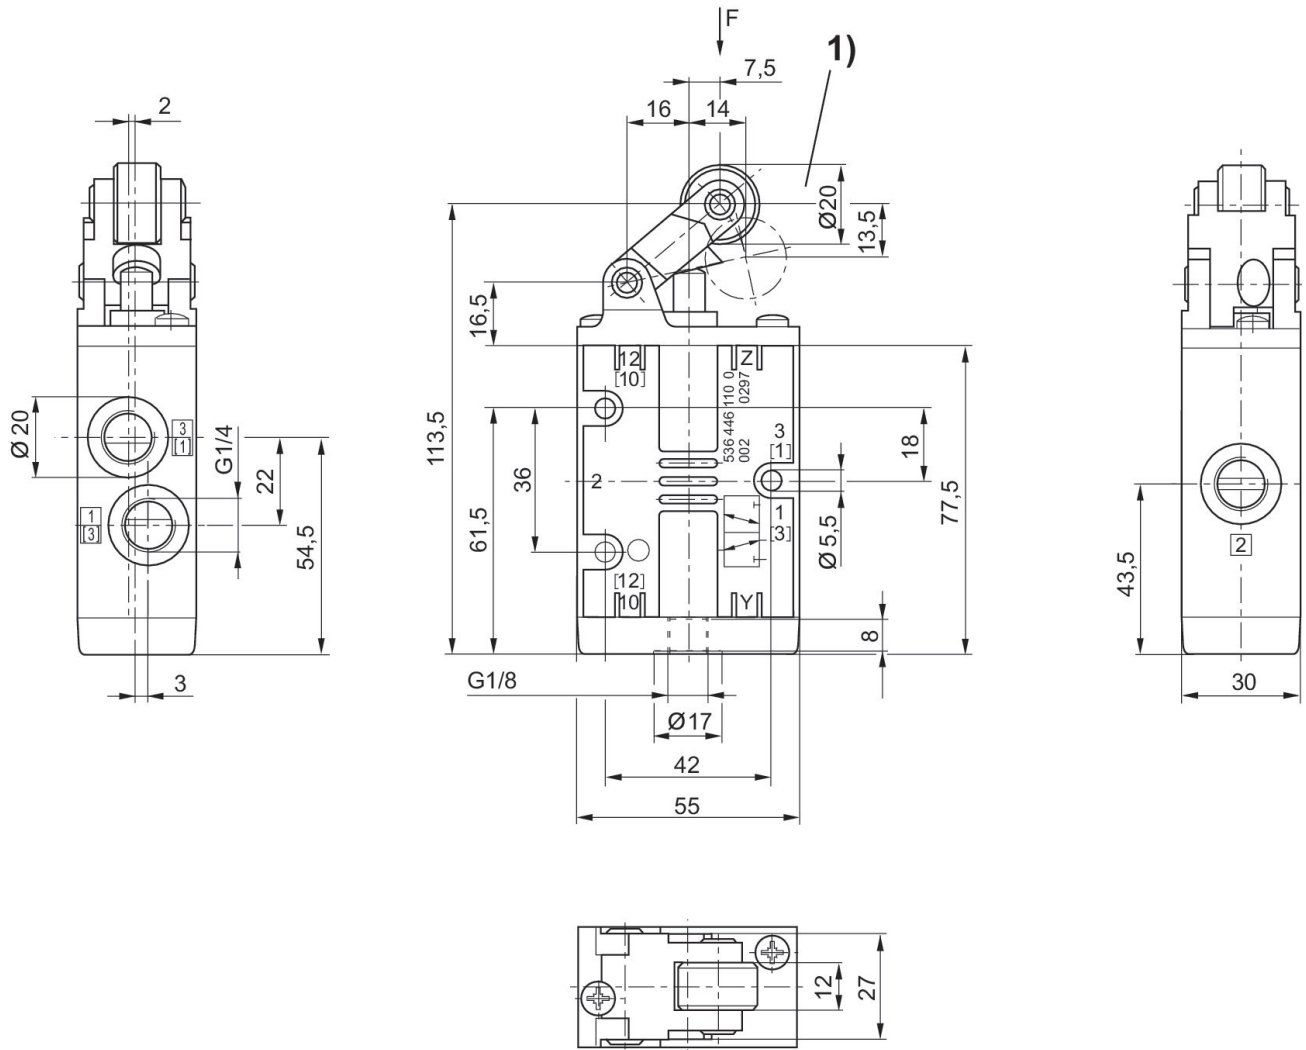

1) approach angle of rollers max. 30°