


Y-Plug connector, series CON-RD

R412021686

Adapter with cable



Technical data

Industry	Industrial
Type	Adapters & contact bridges
Operational voltage	48 V AC
Operating voltage DC, max.	48 V AC
Electrical connection 1, type	Plug
Electrical connection 1, thread size	M12x1
Electrical connection 1, number of poles	4-pin
Electrical connection 1, coding	A-coded
Cable exit	straight
Cable exit angle	180°
Electrical connection 2, type	Socket
Electrical connection 2, thread size	M8x1
Electrical connection 2, number of poles	3-pin

Electrical connection 2, coding	A-coded
Cable exit	straight
Cable exit angle	180°
Cable length	10.5 m
Bending radius min.	1.25 mm
Min. ambient temperature	-25 °C
Max. ambient temperature	80 °C
Wire cross-section	0.25 mm ²
Cable-Ø	4.1 mm
Mounting screw tightening torque	0.8 Nm
Weight	0.064 kg


Material

Part No. R412021686

Technical information


The specified protection class is only valid in assembled and tested state.

Dimensions

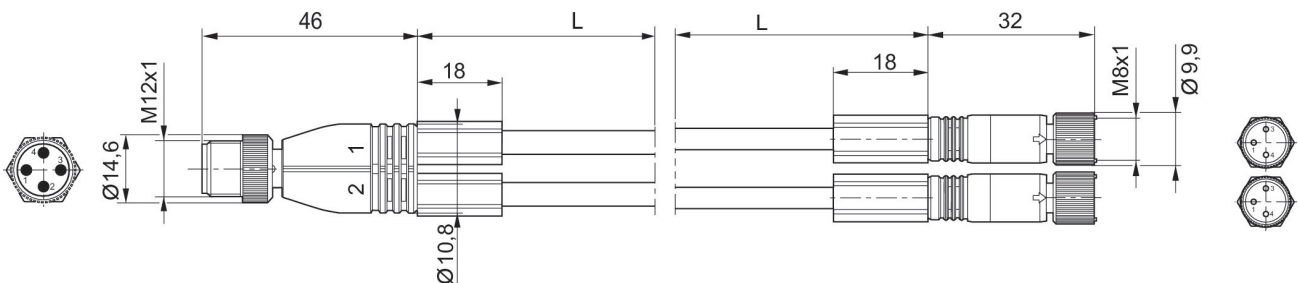

L = length

Plug pin assignment

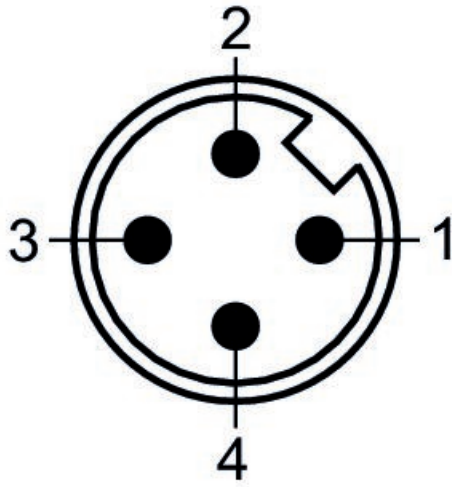

Pin assignment, socket

