

## AVENTICS Series CON-MP Multipole plugs with cable

The AVENTICS Series CON-MP-with cable offers cables with a multipole plug like D-SUB with various numbers of pins and different length, optimized for our focused valve system Series like AV Also C/2 connectors for Valve systems of Series CL03 are available.



### Technical data

Industry	Industrial
Type	Multipole
Cable	with cable
Operational voltage	24 V DC
Max. operating voltage AC	24 V DC
Electrical connection 1, type	Socket
Electrical connection 1, thread size	D-Sub
Electrical connection 1, number of poles	44-pin
Cable exit 1	angled
Cable exit angle	90°
Electrical connection 2, type	open cable ends
Electrical connection 2, number of poles	44-pin
Number of wires	44
Shielding	unshielded
Cable length	5 m
suitable for dynamic laying	suitable for dynamic laying
Min. bending radius	97.5 mm
Protection class	IP65
Min. ambient temperature	-20 °C

# Multipole plug, series CON-MP

2024-04-02

R419500476

---

Max. ambient temperature	80 °C
Max. current	3 A
Wire cross-section	0.22 mm <sup>2</sup>
Cable-Ø	13 mm
Weight	1.178 kg

## Material

Housing material	Thermoplastic elastomer
Material cable sheath	Polyurethane
Part No.	R419500476

## Technical information

The specified protection class is only valid in assembled and tested state.

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

# Multipole plug, series CON-MP

2024-04-02

R419500476

Fig. 1

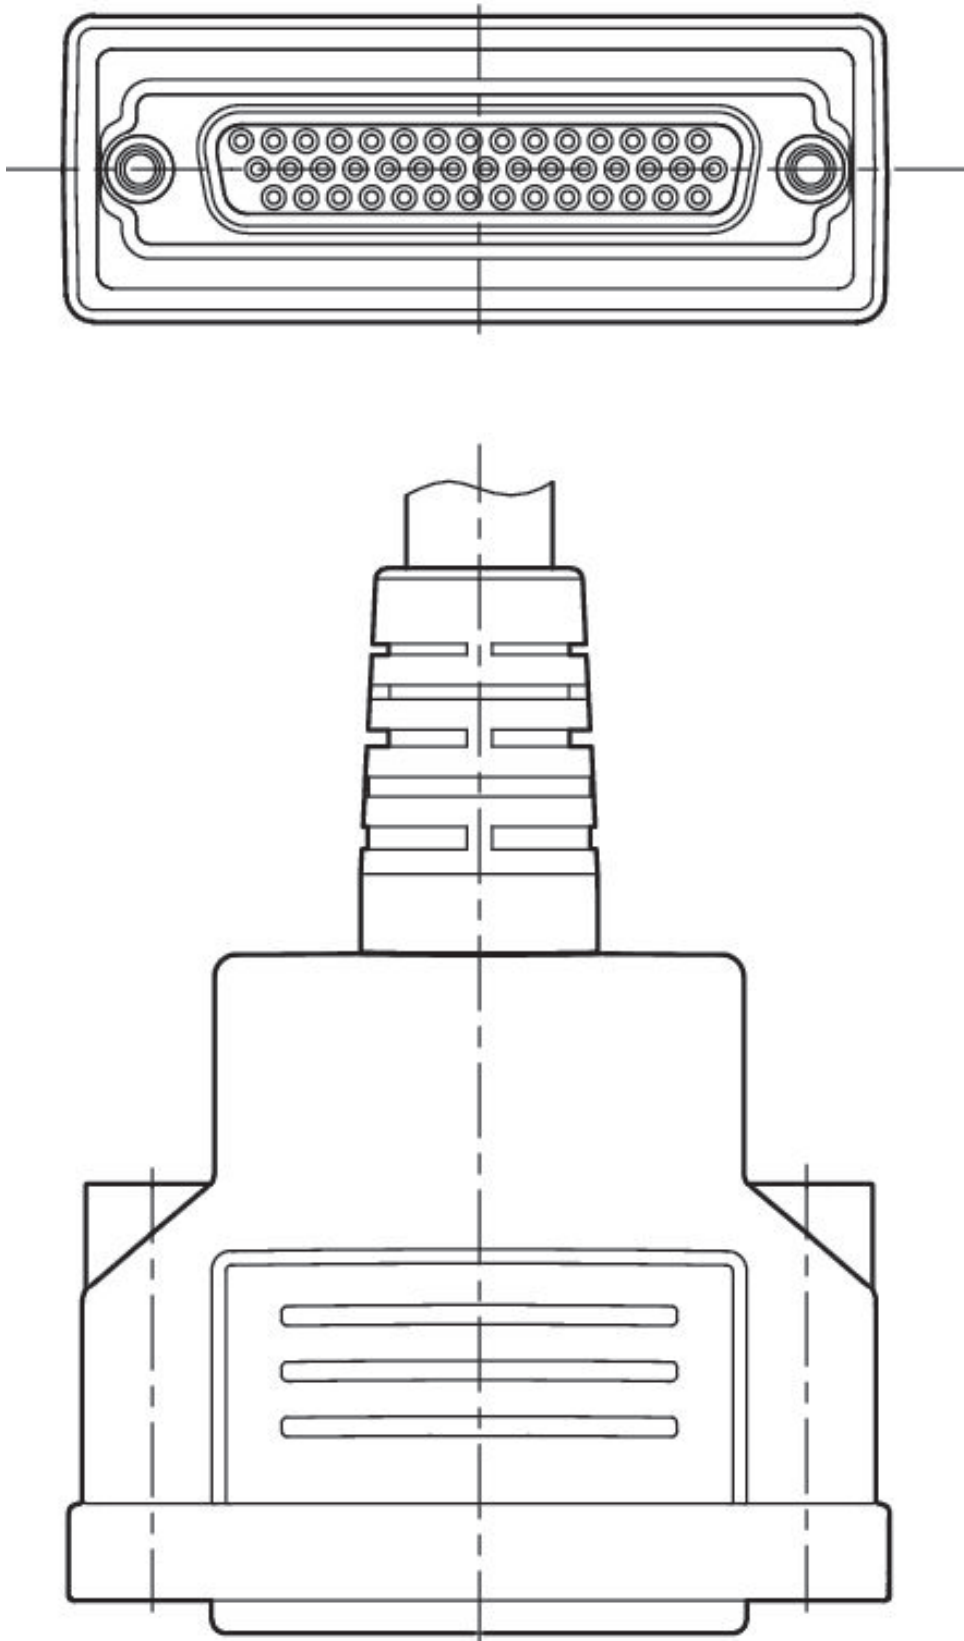


# Multipole plug, series CON-MP

2024-04-02

R419500476

Fig. 2

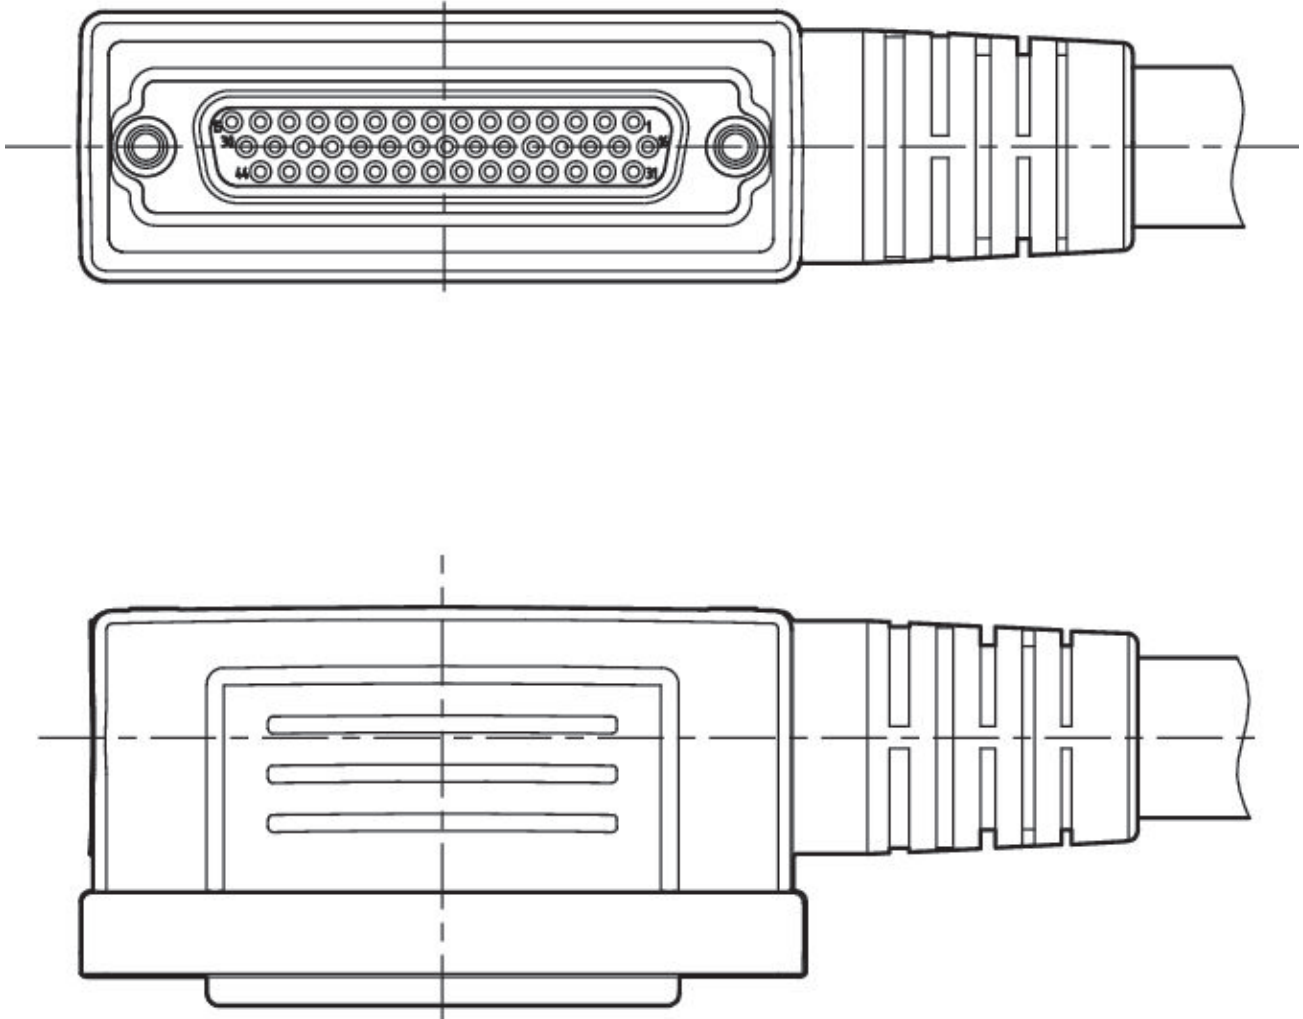


# Multipole plug, series CON-MP

2024-04-02

R419500476

PIN assignment and cable colors  
cable identification as per DIN 47100

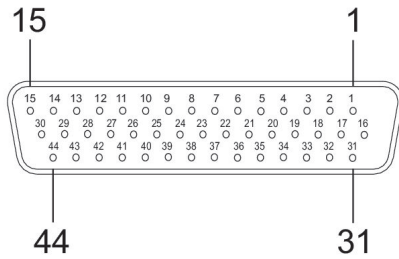

Socket

## D-Sub socket, 44 pin

Pin	Color
1	white
2	brown
3	green
4	yellow
5	gray
6	pink
7	blue
8	red
9	black
10	violet
11	gray/pink
12	red/blue
13	white/green
14	brown/green
15	white/yellow
16	yellow/brown
17	white/gray
18	gray/brown
19	white/pink
20	pink/brown
21	white/blue
22	brown/blue
23	white/red
24	brown/red
25	white/black
26	brown/black
27	gray/green
28	yellow/gray
29	pink/green
30	yellow/pink
31	green/blue
32	yellow/blue
33	green/red
34	yellow/red
35	gray/black
36	yellow/black
37	gray/blue
38	pink/blue
39	white/black
40	gray/black
41	gray/black
42	gray/black
43	gray/black
44	gray/black