
# Round plug connector, Series CON-RD

8946054702

General series information AVENTICS Series CON-RD Round plug connectors with cable

■ The AVENTICS Series CON-RD-with cable offers cables with round plug connectors for various types like M8x1, M12x1 or 7/8-16UNC and different cable length, optimized for our focused valves with M8x1 or M12x1 connection and electronic systems like AES and G3.





#### Technical data

Industry Industrial

Type Round plug connectors

Cable with cable

Operational voltage 60 V DC / 110 V AC

36 V DC Operating voltage AC max. 30 V AC Operating voltage DC, max. Socket Electrical connection 1, type Electrical connection 1, thread size M12x1 Electrical connection 1, number of poles 5-pin Electrical connection 1, coding A-coded Cable exit 1 straight 180° Cable exit angle Electrical connection 2, type Plug Electrical connection 2, thread size M12x1



Electrical connection 2, number of poles	5-pin
Electrical connection 2, coding	A-coded
Cable exit 2	straight
Cable exit angle	180°
Number of wires	5
Shielding	shielded
Cable length	5 m
Bending radius min.	45 mm
Protection class	IP67
Min. ambient temperature	-25 °C
Max. ambient temperature	80 °C
Protocol	DDL
Max. current	4 A
Wire cross-section	0.34 mm <sup>2</sup>
Cable-Ø	6 mm

#### Material


Weight

Housing material Polyurethane
Seal material Fluorocaoutchouc
Material cable sheath Polyurethane
Part No. 8946054702

#### **Technical information**

The specified protection class is only valid in assembled and tested state.

### **Dimensions**

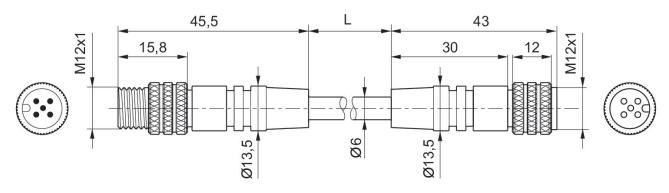


0.289 kg

L = cable length



### Pin assignment, socket



## Plug pin assignment

