
# Round plug connector, Series CON-RD

8946202842

General series information AVENTICS Series CON-RD Round plug connectors with cable

■ The AVENTICS Series CON-RD-with cable offers cables with round plug connectors for various types like M8x1, M12x1 or 7/8-16UNC and different cable length, optimized for our focused valves with M8x1 or M12x1 connection and electronic systems like AES and G3.





#### Technical data

Industry Industrial

Type Round plug connectors

Cable with cable

Operational voltage 60 V DC / 110 V AC

Operating voltage AC max. 36 V DC Operating voltage DC, max. 30 V AC Electrical connection 1, type Socket Electrical connection 1, thread size M12x1 Electrical connection 1, number of poles 8-pin Electrical connection 1, coding A-coded Cable exit 1 straight Cable exit angle 180°



Electrical connection 2, type	Plug
Electrical connection 2, thread size	M12x1
Electrical connection 2, number of poles	8-pin
Electrical connection 2, coding	A-coded
Cable exit 2	straight
Cable exit angle	180°
Number of wires	8

Shielding shielded Cable length 10 m

suitable for dynamic laying suitable for dynamic laying

Protection class IP67

Min. ambient temperature -25 °C

Max. ambient temperature 80 °C

Max. current 1.5 A

Wire cross-section 0.25 mm²

Cable-Ø 6.6 mm

Weight 0.65 kg


#### Material

Housing material Polyurethane
Seal material Fluorocaoutchouc
Material cable sheath Polyurethane
Part No. 8946202842

#### Technical information

The specified protection class is only valid in assembled and tested state.


#### **Dimensions**

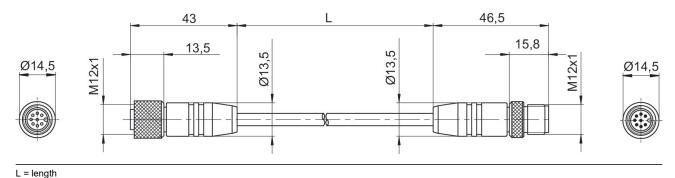





### Pin assignment, socket



## Plug pin assignment

