
Round plug connector, Series CON-RD

8946202822

General series information AVENTICS Series CON-RD Round plug connectors with cable

■ The AVENTICS Series CON-RD-with cable offers cables with round plug connectors for various types like M8x1, M12x1 or 7/8-16UNC and different cable length, optimized for our focused valves with M8x1 or M12x1 connection and electronic systems like AES and G3.





Technical data

Industry Industrial

Type Round plug connectors

Cable with cable

Operational voltage 60 V DC / 110 V AC

Operating voltage AC max. 36 V DC Operating voltage DC, max. 30 V AC Electrical connection 1, type Socket Electrical connection 1, thread size M12x1 Electrical connection 1, number of poles 8-pin Electrical connection 1, coding A-coded Cable exit straight Cable exit angle 180°



Electrical connection 2, type	Plug
Electrical connection 2, thread size	M12x1
Electrical connection 2, number of poles	8-pin
Electrical connection 2, coding	A-coded
Cable exit	straight
Cable exit angle	180°
Number of wires	8
0.1.1.11	

Shielding shielded Cable length 2 m

suitable for dynamic laying suitable for dynamic laying

Protection class IP67

Min. ambient temperature -25 °C

Max. ambient temperature 80 °C

Max. current 1.5 A

Wire cross-section 0.25 mm²

Cable-Ø 6.6 mm

Weight 0.161 kg


Material

Housing material Polyurethane
Seal material Fluorocaoutchouc
Material cable sheath Polyurethane
Part No. 8946202822

Technical information

The specified protection class is only valid in assembled and tested state.


Dimensions

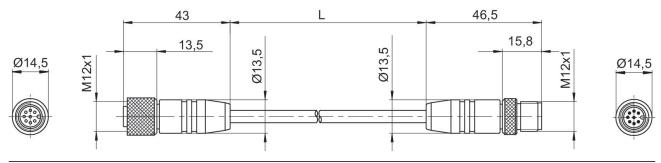

L = length



Pin assignment, socket



Plug pin assignment

