

# Coupling plug with collar

1823386020


Series CP1

2024-10-23

- $Q_n = 3200$  l/min

## AVENTICS Series CP1 Couplings

The AVENTICS Series CP1 of safe couplings using single snap-on coupling are robust, safe and fit two different plug-in profiles, the EURO- profile and the ARO profile.

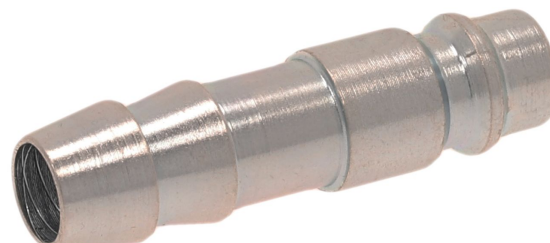

## Technical data

Industry

Industrial

Note

Archive product: Do not use in new constructions!

Port D

NW 7,2

Port G

Ø 13

Compressed air connection type

Coupling plug

Nominal width NW

7.2 mm

Min. working pressure

0 bar

Max. working pressure

16 bar

Min. ambient temperature

-10 °C

Max. ambient temperature

90 °C

Min. medium temperature

-10 °C

Max. medium temperature

90 °C

Medium

Compressed air

Delivery unit

10 piece

Weight per piece

0.022 kg

Housing material

Brass

Surface housing

nickel-plated

1823386020


# Coupling plug with collar

1823386020

Series CP1

2024-10-23

## Dimensions

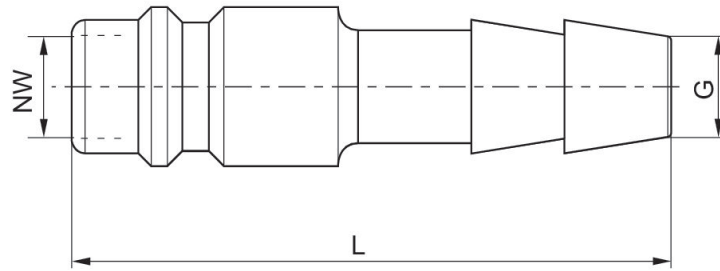

| Part No.   | Port G | Nominal width NW | L  |
|------------|--------|------------------|----|
| 1823386017 | Ø 8    | 7,2 mm           | 45 |
| 1823386020 | Ø 13   | 7,2 mm           | 45 |