


- Various connection options possible
- Assembly takes place on manifold strips
- Extensive voltage range
- ATEX version available

## AVENTICS Series DO Directional valves

The AVENTICS Series DO offer a simple, reliable and robust solution for all classical pilot control functions with direct electrical operation.



## Technical data

Industry

Industrial

Activation

Electrically

Note

Archive product: Do not use in new constructions!

Frame size

DO30

Valve type

Poppet valve

Basic valve equipment

Basic valve without coil

Switching principle

3/2, with spring return

Valve function

NC

Sealing principle

Soft seal

Connection type

Plate valve with pipe connection

Manual override

without detent

Compressed air connection

CNOMO

Compressed air connection input

CNOMO

Compressed air connection output

CNOMO

Compressed air connection, exhaust

M5

Nominal flow Qn

68 l/min

# 3/2-directional valve, Series DO30

Series DO

0820019985

2024-10-14

---

Nominal flow Qn 1 to 2	68 l/min
Nominal flow Qn 2 to 3	90 l/min
Min. working pressure	0 bar
Max. working pressure	10 bar
Electrical connection type	Plug
Electrical connection size	EN 175301-803, form A
Protection class with connection	IP65
Pilot valve width	30 mm
Compatibility index	15
Power consumption	Higher voltage tolerance
Duty cycle	100 %
Standards	CNOMO / NFE 49-003-1
ATEX	Suitable for ATEX
Min. ambient temperature	-10 °C
Max. ambient temperature	50 °C
Min. medium temperature	-10 °C
Max. medium temperature	50 °C
Medium	Compressed air
Min. oil content of compressed air	0 mg/m <sup>3</sup>
Max. oil content of compressed air	5 mg/m <sup>3</sup>
Max. particle size	5 µm
Mounting on manifold strip	P-strip
Mounting screws	M4
Weight	0.06 kg
<b>Material</b>	
Housing material	Plastic
Seal material	Fluorocautchouc
Part No.	0820019985

## Technical information

ATEX optional: ATEX version can be produced by combining the basic valve without coil with an ATEX coil. ATEX ID: see ATEX coils catalog page.


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

## Dimensions

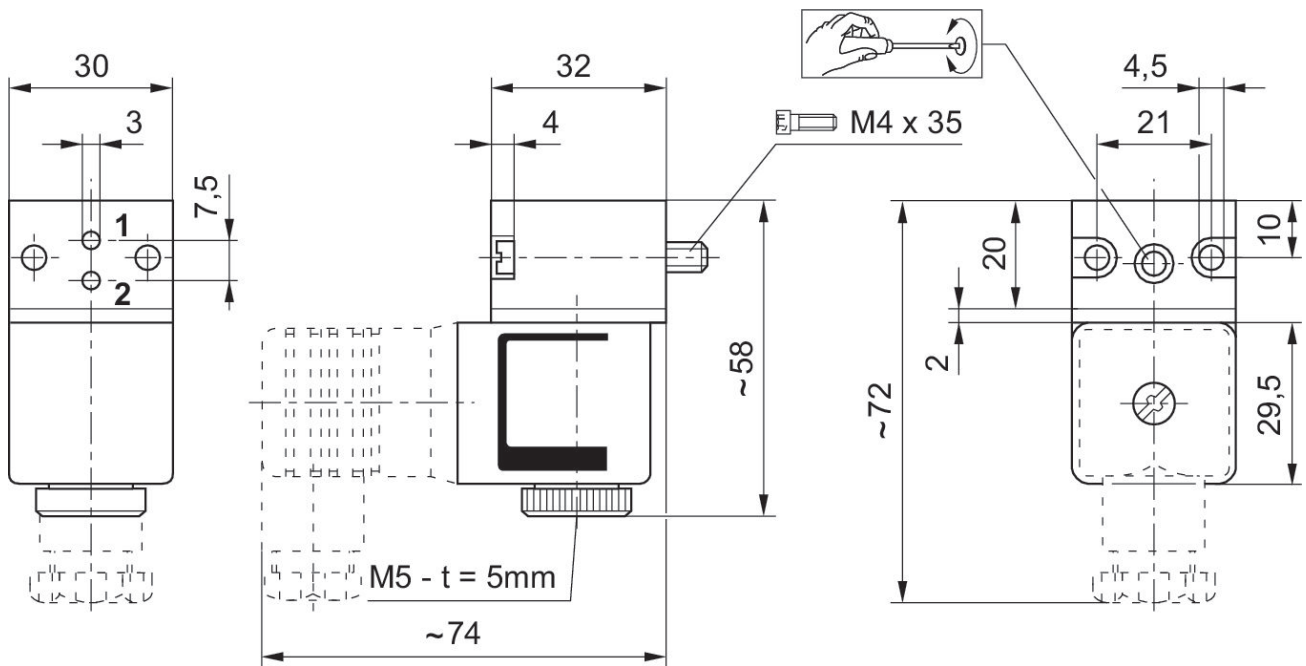

t = depth