

Bulkhead connector, through internal thread

2024-03-21

1823391227

AVENTICS Blanking screws and connectors



Technical data

Industry	Industrial
Port G	G 1/4
Type	FPT-S-RSG
Min. working pressure	0 bar
Max. working pressure	16 bar
Min. ambient temperature	-20 °C
Max. ambient temperature	80 °C
Delivery unit	5 piece

Material


Material	Brass
Surface	nickel-plated
Part No.	1823391227

Bulkhead connector, through internal thread

2024-03-21

1823391227

Dimensions

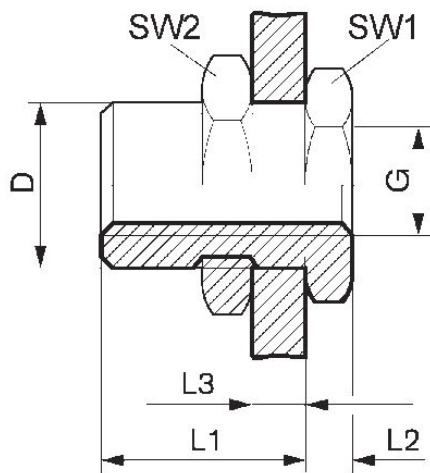

Part No.	Port G	D	L1	L2	L3 1)	SW1	SW2
1823391225	M5	M10x1	10.5	3.5	7	14	14
1823391226	G 1/8	M16x1,5	14	4	10	19	22
1823391227	G 1/4	M20x1,5	21	4	16	24	27
1823391228	G 3/8	M26x1,5	21	5	15	30	32
1823391262	G 1/2	M28x1,5	27	6	21	32	36
8623003400	G 3/4	M34x2	30	6	24	41	41
R412026571	G 1	M42x2	34	-	-	46	50
R415009441	G 1	M42x2	42	-	-	46	50

1) Max.