


Elbow fitting

1823391725

2024-03-21

AVENTICS Blanking screws and connectors

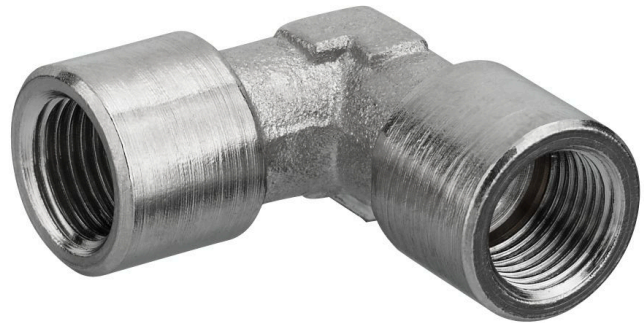

Technical data

| | |
|--------------------------------|-----------------|
| Industry | Industrial |
| Compressed air connection type | Internal thread |
| Port G | G 3/4 |
| Type | FPT-S-RVK |
| Min. working pressure | 0 bar |
| Max. working pressure | 16 bar |
| Min. ambient temperature | -20 °C |
| Max. ambient temperature | 80 °C |
| Delivery unit | 2 piece |

Material


| | |
|----------|---------------|
| Material | Brass |
| Surface | nickel-plated |
| Part No. | 1823391725 |

Elbow fitting

1823391725

2024-03-21

Dimensions

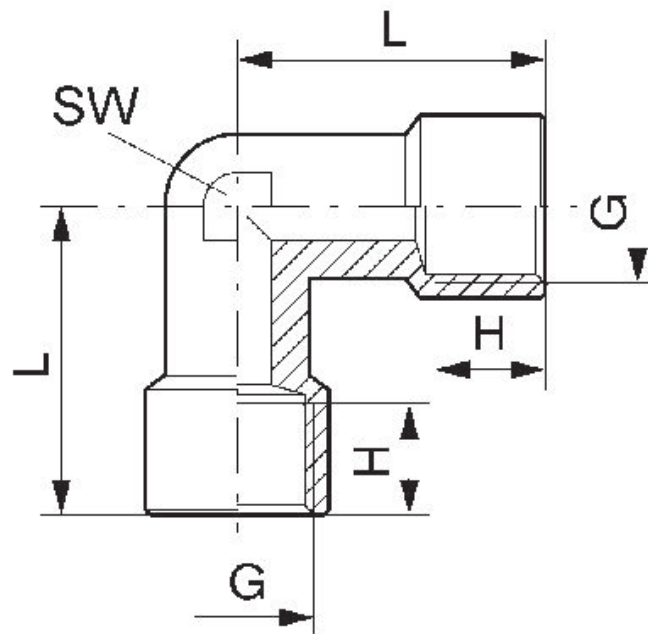

| Part No. | Port G | H | L | SW |
|------------|--------|------|------|----|
| 1823391721 | G 1/8 | 8.2 | 21 | 10 |
| 1823391722 | G 1/4 | 11.4 | 25.5 | 13 |
| 1823391723 | G 3/8 | 11.3 | 28 | 17 |
| 1823391724 | G 1/2 | 15 | 34 | 21 |
| 1823391725 | G 3/4 | 16.5 | 36 | 25 |
| 1823391726 | G 1 | 19 | 45 | 30 |