

## AVENTICS Blanking screws and connectors




### Technical data

|                                  |                 |
|----------------------------------|-----------------|
| Industry                         | Industrial      |
| Compressed air connection type   | External thread |
| Port G                           | R 1/8           |
| Compressed air connection type 2 | Internal thread |
| Port D                           | G 1/8           |
| Type                             | FPT-S-RVT       |
| Min. working pressure            | 0 bar           |
| Max. working pressure            | 16 bar          |
| Min. ambient temperature         | -20 °C          |
| Max. ambient temperature         | 80 °C           |
| Delivery unit                    | 10 piece        |

### Material

|          |               |
|----------|---------------|
| Material | Brass         |
| Surface  | nickel-plated |
| Part No. | 1823391727    |

## Dimensions

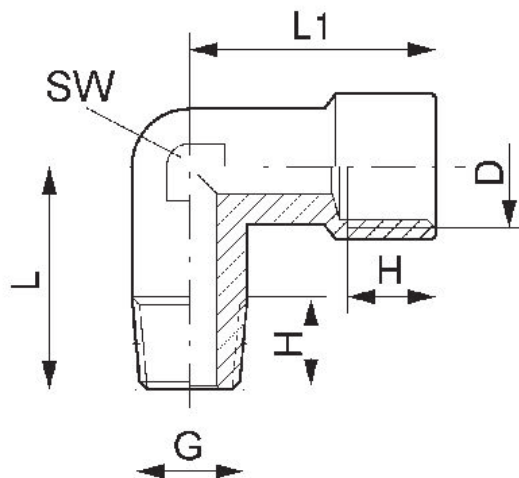

| Part No.   | Port D | Port G | H1   | H2  | L    | L1   | SW |
|------------|--------|--------|------|-----|------|------|----|
| 1823391727 | G 1/8  | R 1/8  | 8    | 7   | 19   | 21   | 10 |
| 1823391728 | G 1/4  | R 1/4  | 11   | 9   | 24   | 25.5 | 13 |
| 1823391729 | G 3/8  | R 3/8  | 11.5 | 9.5 | 26.5 | 28   | 17 |
| 1823391730 | G 1/2  | R 1/2  | 13   | 13  | 30.5 | 33   | 21 |
| 1823391731 | G 3/4  | R 3/4  | 14   | 14  | 32   | 36   | 25 |
| 1823391732 | G 1    | R 1    | 15   | 15  | 39   | 45   | 30 |