

## AVENTICS Blanking screws and connectors



### Technical data

Industry	Industrial
Compressed air connection type	External thread
Port G	R 1
Compressed air connection type 2	Internal thread
Port D	G 1
Type	FPT-S-RVT
Min. working pressure	0 bar
Max. working pressure	16 bar
Min. ambient temperature	-20 °C
Max. ambient temperature	80 °C
Delivery unit	2 piece

### Material


Material	Brass
Surface	nickel-plated
Part No.	1823391732

# Elbow fitting

2024-03-21

1823391732

## Dimensions

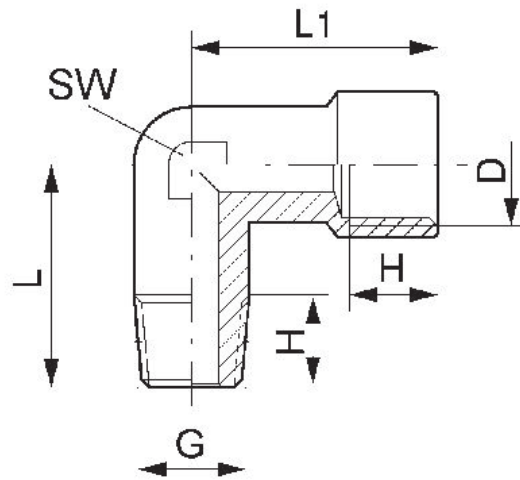

Part No.	Port D	Port G	H1	H2	L	L1	SW
1823391727	G 1/8	R 1/8	8	7	19	21	10
1823391728	G 1/4	R 1/4	11	9	24	25.5	13
1823391729	G 3/8	R 3/8	11.5	9.5	26.5	28	17
1823391730	G 1/2	R 1/2	13	13	30.5	33	21
1823391731	G 3/4	R 3/4	14	14	32	36	25
1823391732	G 1	R 1	15	15	39	45	30