

Pressure regulators, Series M Plus™

R431000670

Pressure regulators, Series M Plus™



Technical data

Industry	Max. ambient temperature
Industrial	71 °C
Type	Min. medium temperature
Poppet valve	-40 °C
Type	Max. medium temperature
MC-2	71 °C
Compressed air connection input	Medium
1/8-27 NPTF	Compressed air
Compressed air connection output	Max. particle size
1/8-27 NPTF	50 µm
Working pressure min.	Oil content of compressed air min.
0 bar	0 mg/m³
Working pressure max	Oil content of compressed air max.
10.3 bar	1 mg/m³
Regulation range min.	Weight
0 bar	1.2 kg
Regulation range max.	Part No.
4.1 bar	R431000670
Min. ambient temperature	
-40 °C	

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

Dimensions in inches

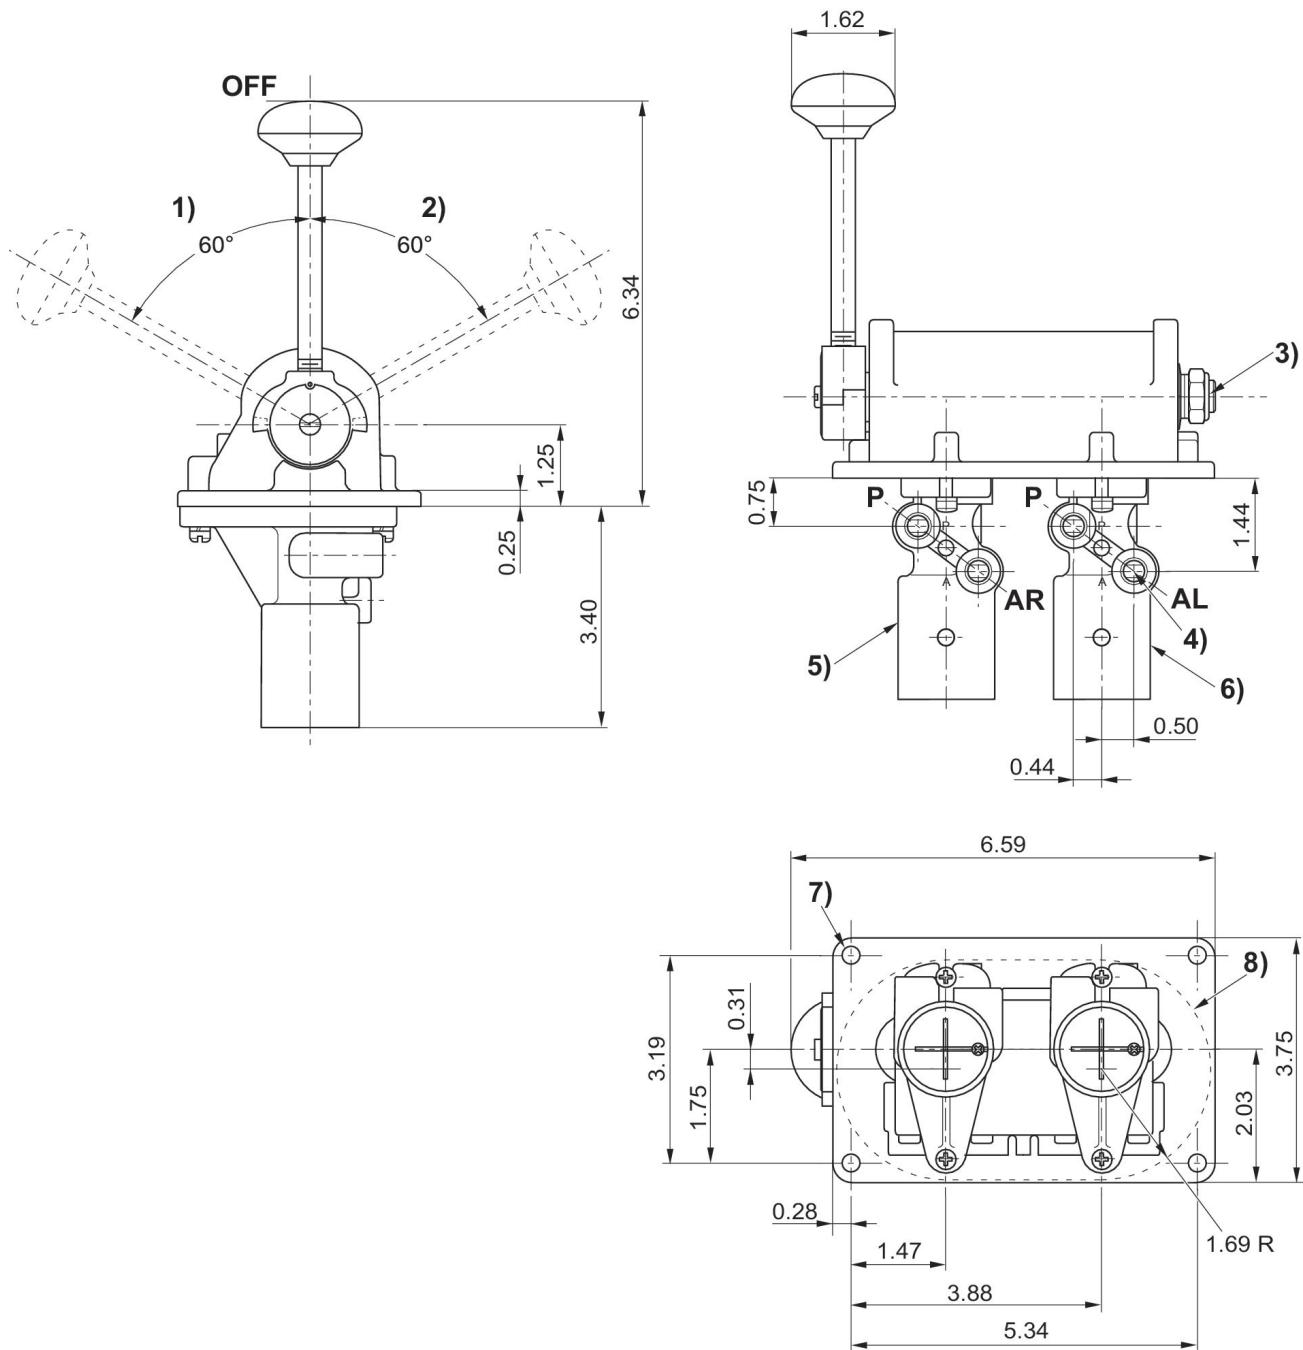

- 1) Valve # 1, 2) Valve # 2
- 3) Friction brake adjustment
- 4) 1/8-27 NPTF
- 5) Valve # 1, 6) Valve # 2
- 7) 0.281 diameter (4) places
- 8) panel mounting hole