


# Filter, Series MU1-FLS

R412000667

General series information  
Series MU1

- The AVENTICS Series MU1 components are ideal for applications in harsh environments. They offer large thread connections to guarantee a high compressed air flow rate and provide reliable filtration, regulation and lubrication.



## Technical data

Industry

Industrial

Parts

Filter

Reservoir

reservoir, polycarbonate, with metal protective guard

Port

G 1 1/2

Filter porosity

8  $\mu$ m

Nominal flow Qn

30000 l/min

Condensate drain

Manual

Working pressure min.

0 bar

Working pressure max

16 bar

Min. ambient temperature

-10 °C

Max. ambient temperature

60 °C

Medium

Compressed air  
Neutral gases

Filter reservoir volume	300 cm <sup>3</sup>
Filter element	exchangeable
Weight	3.5 kg
Mounting orientation	vertical

## Material

Housing material	Die cast zinc
Seal material	Acrylonitrile butadiene rubber
Material reservoir	Polycarbonate
Material protective guard	Steel, chrome-plated
Material filter insert	Polyethylene
Part No.	R412000667

## Technical information


The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

Mounting via 2 through-holes in housing

Nominal flow  $Q_n$  with secondary pressure  $p_2 = 6$  bar at  $\Delta p = 1$  bar

Metal protective guard can be retrofitted for all polycarbonate reservoirs

## Dimensions

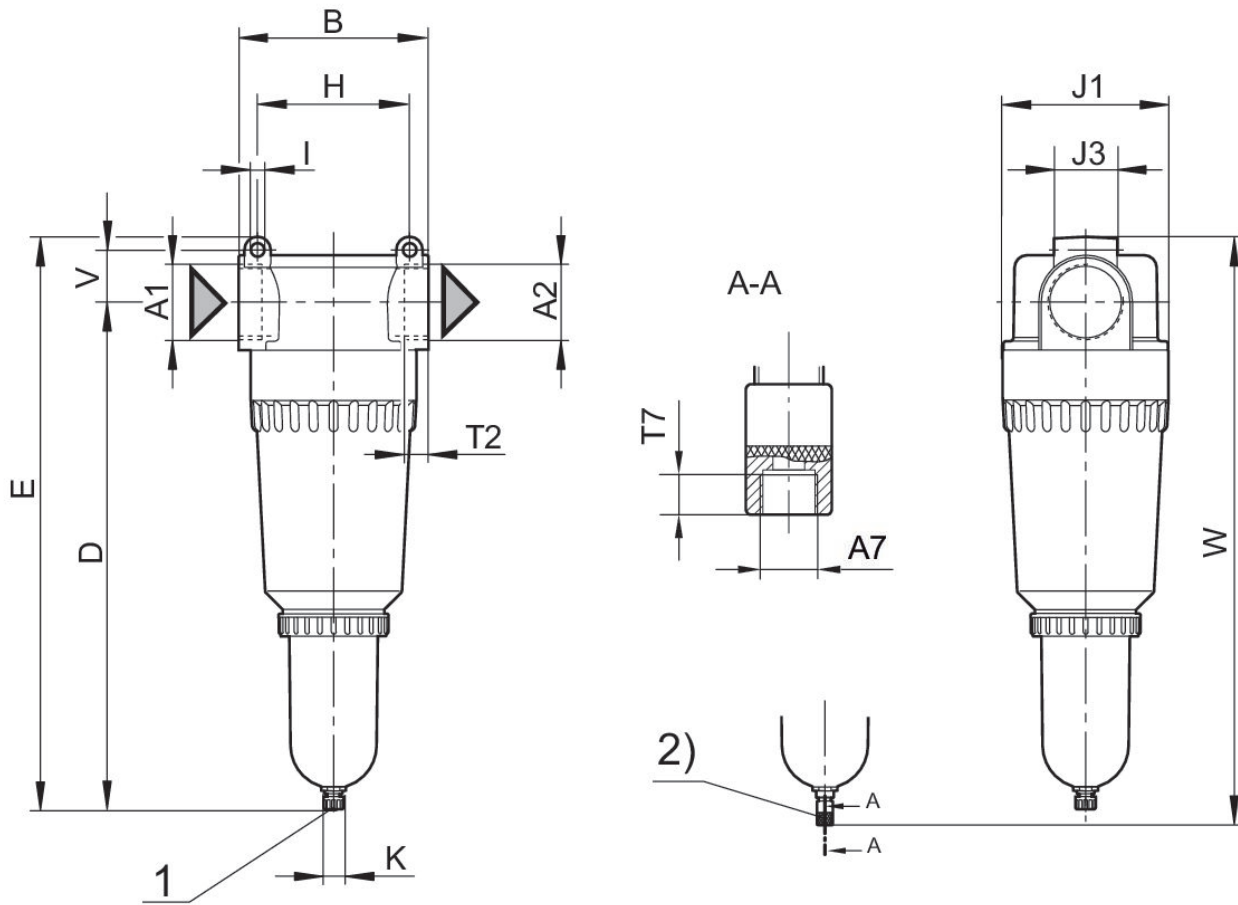

1) manual condensate drain 2) fully automatic condensate drain


Part No.	A1	A2	A7	B ±7	D ±7	E ±7	H	I	J1
R412000667	G 1 1/2	G 1 1/2	G 1/8	150	383	424	120	10.5	131
R412006568	G 2	G 2	G 1/8	150	400.5	452	120	10.5	131
R412006570	G 2	G 2	G 1/8	150	400.5	452	120	10.5	131
R412006571	G 2	G 2	G 1/8	150	400.5	452	120	10.5	131

Part No.	J3	T2	T7	V ±5	W ±7				
R412000667	50	24	8.5	41	441.5				
R412006568	50	24	8.5	41	464.5				
R412006570	50	24	8.5	41	464.5				
R412006571	50	24	8.5	41	464.5				

Part No.		
R412000667		
R412006568		

Part No.		
R412006570		
R412006571		

### Flow rate characteristic, $p_2 = 0,05 - 7$ bar

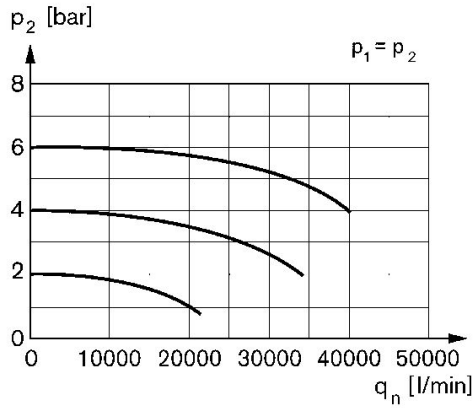

$p_2$  = secondary pressure  $q_n$  = nominal flow