


AVENTICS Series NL4 Air Preparation Units

The AVENTICS Series NL maintenance units are suitable for all areas: as individual components or as assembled maintenance units, for centralized or decentralized compressed air preparation, in compact or powerful versions, for use in high or low temperatures. This line offers a complete, customizable compressed air preparation technology. It includes an option to combine every component in the Series to achieve the desired function, making it possible to adjust the components precisely to the application requirements.



Technical data

| | |
|--|---|
| Industry | Industrial |
| Parts | Filter |
| Reservoir | reservoir, polycarbonate, with metal protective guard |
| Port | G 3/4 |
| Filter porosity | 5 μm |
| Nominal flow Qn | 4000 l/min |
| Condensate drain | fully automatic, open without pressure |
| Min. working pressure | 1.5 bar |
| Max. working pressure | 16 bar |
| Min. ambient temperature | -10 °C |
| Max. ambient temperature | 60 °C |
| Medium | Compressed air Neutral gases |
| Max. achievable compressed air class acc. to ISO 8573-1:2010 | 6 : 7 : - |
| Filter reservoir volume | 50 cm ³ |
| Filter element | exchangeable |
| Weight | 0.956 kg |
| Mounting orientation | vertical |

0821303544

Type Can be assembled into blocks

Material

| | |
|---------------------------|---------------------------------|
| Housing material | Die cast zinc |
| Material front plate | Acrylonitrile butadiene styrene |
| Seal material | Acrylonitrile butadiene rubber |
| Material reservoir | Polycarbonate |
| Material protective guard | Steel, chrome-plated |
| Material filter insert | Cellpor |
| Part No. | 0821303544 |

Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.


Note: Polycarbonate reservoirs are susceptible to solvents, supplementary information can be found at "Customer information".

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.

Also suitable for separation of fluid oil or water due to the design.

Nominal flow Q_n with secondary pressure $p_2 = 6$ bar at $\Delta p = 1$ bar

Dimensions

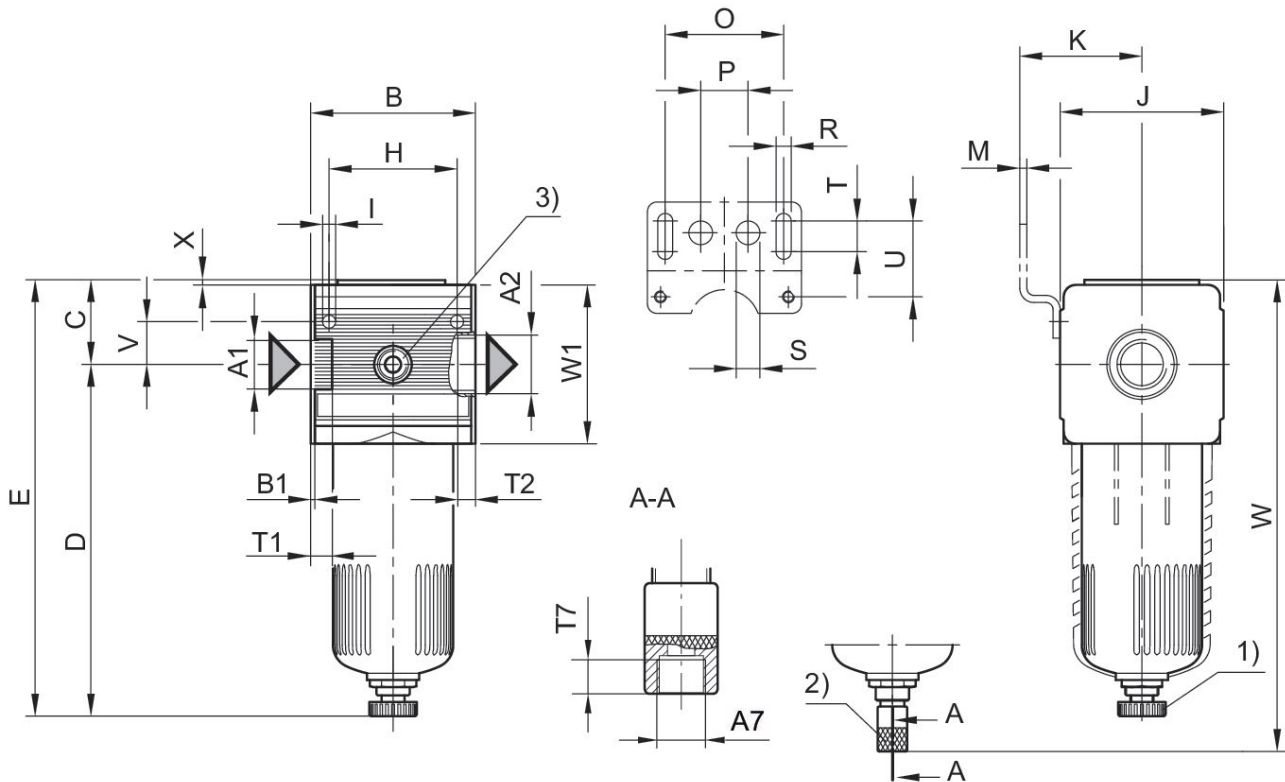

A1 = input A2 = output

A7 = condensate drain

1) Semi-automatic condensate drain 2) fully automatic condensate drain

3) Optional pressure gauge connection G 1/4

Dimensions in mm

| Part No. | A1 | A2 | A7 | B | B1 | C | D | E | H |
|------------|-------|-------|-------|------|-----|------|-------|-----|----|
| 0821303500 | G 1/2 | G 1/2 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303501 | G 1/2 | G 1/2 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303502 | G 1/2 | G 1/2 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303503 | G 1/2 | G 1/2 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303504 | G 1/2 | G 1/2 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303505 | G 1/2 | G 1/2 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303559 | G 1/2 | G 1/2 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303540 | G 3/4 | G 3/4 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303558 | G 3/4 | G 3/4 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303541 | G 3/4 | G 3/4 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303542 | G 3/4 | G 3/4 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303543 | G 3/4 | G 3/4 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303544 | G 3/4 | G 3/4 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |
| 0821303545 | G 3/4 | G 3/4 | G 1/8 | 69.6 | 1.8 | 36.5 | 146.5 | 183 | 54 |

Filter, Series NL4-FLS


2024-04-24

0821303544

| Part No. | I | J | K | M | O | P | R | S | T |
|------------|-----|----|------|---|----|----|-----|----|----|
| 0821303500 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303501 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303502 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303503 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303504 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303505 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303559 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303540 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303558 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303541 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303542 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303543 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303544 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |
| 0821303545 | 5.5 | 69 | 54.5 | 3 | 50 | 20 | 6.4 | 10 | 13 |

| Part No. | T1 | T2 | T7 | U | V | W | W1 | X |
|------------|----|----|-----|----|----|-----|----|---|
| 0821303500 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303501 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303502 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303503 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303504 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303505 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303559 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303540 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303558 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303541 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303542 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303543 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303544 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |
| 0821303545 | 13 | 13 | 8.5 | 33 | 18 | 199 | 67 | 3 |

Flow rate characteristic, $p_2 = 0,05 - 7$ bar

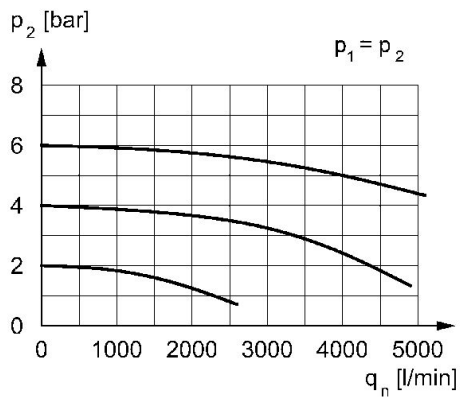

p_2 = secondary pressure q_n = nominal flow