


0821302052

AVENTICS Series PR1 Precision pressure regulators

The AVENTICS Series PR1/PR2 is designed for applications that demand fast responses to the slightest fluctuation in compressed air. They can be adjusted precisely and are an alternative to electronic pressure regulators. Precision pressure regulators are used to achieve extremely accurate pressure control independent from the pilot pressure and the flow rate. They offer high performance and flexibility, combined with increased reliability.



Technical data

| | |
|-------------------------------------|-----------------------------------|
| Industry | Industrial |
| Function | Precision pressure regulator |
| Parts | Precision pressure regulator |
| Mounting orientation | Any |
| Regulator type | Diaphragm-type pressure regulator |
| Port | G 3/8 |
| Nominal flow Q_n | 5600 l/min |
| Min. regulation range | 0.05 bar |
| Max. regulation range | 10 bar |
| Min. working pressure | 0.5 bar |
| Max. working pressure | 16 bar |
| Min. ambient temperature | -35 °C |
| Max. ambient temperature | 60 °C |
| Activation | Pneumatically |
| Regulator function | with relieving air exhaust |
| Certificates | Suitable for ATEX |
| Pressure supply | single |
| Max. internal air consumption q_v | 6 l/min |
| Max. control pressure | 10 bar |

Precision pressure regulator, Series PR1-RGP

2024-04-05

0821302052

| | |
|---------------------------|---------------------------------|
| Medium | Compressed air Neutral gases |
| Recommended pre-filtering | 5 μm |
| Weight | 1.26 kg |

Material

| | |
|------------------|--------------------|
| Housing material | Die cast zinc |
| Seal material | Chloroprene rubber |
| Part No. | 0821302052 |

Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

Relieving exhaust (≤ 10 mbar over set pressure)

Mounting: mounting bracket R412004872 or installation in piping


Notice: This product may only be operated with oil-free, dry compressed air.

Internal air consumption depending on adjustment range

Suitable for use in Ex zones 1, 2, 21, 22.

Nominal flow Q_n with secondary pressure $p_2 = 6$ bar at $\Delta p = 1$ bar

Dimensions

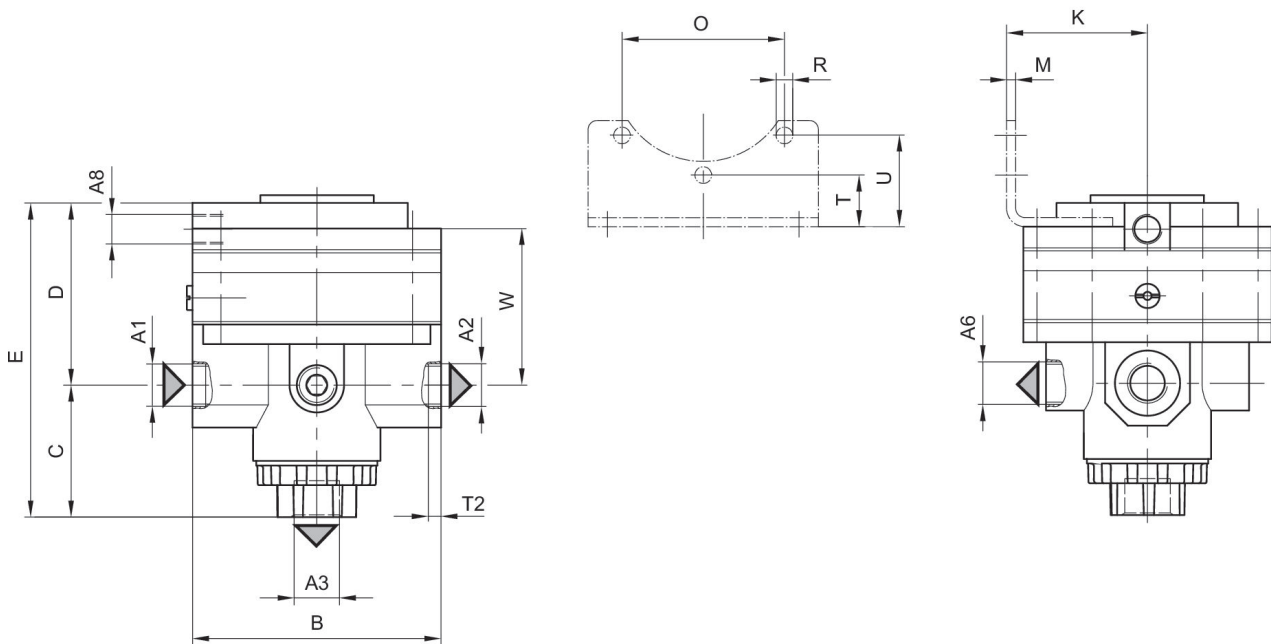

A1 = input
A2 = output
A3 = relieving exhaust
A6 = pressure gauge connection

0821302052


A8 = Pilot connection

Dimensions in mm


| Part No. | A1 | A2 | A3 | A6 | A8 | B | C | D | E |
|------------|-------|-------|-------|-------|-------|----|------|------|-----|
| 0821302052 | G 3/8 | G 3/8 | G 3/8 | G 1/4 | G 1/8 | 82 | 43.5 | 65.5 | 108 |

| Part No. | K | M | O | R | T | T2 | U | W |
|------------|----|---|----|---|----|----|----|----|
| 0821302052 | 47 | 3 | 54 | 4 | 17 | 16 | 30 | 51 |

Flow rate characteristic, $p_2 = 0,05 - 5$ bar Pressure characteristics curve

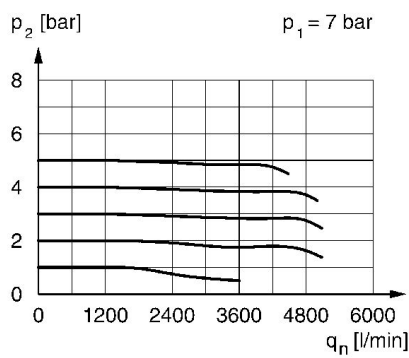


p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

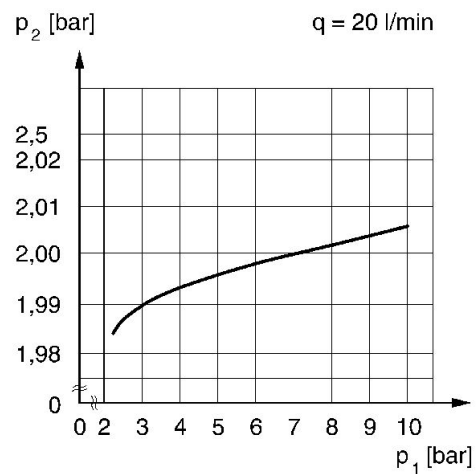


p_1 = Working pressure
 p_2 = Secondary pressure
 q = flow rate

Flow rate characteristic, $p_2 = 0,05 - 7$ bar

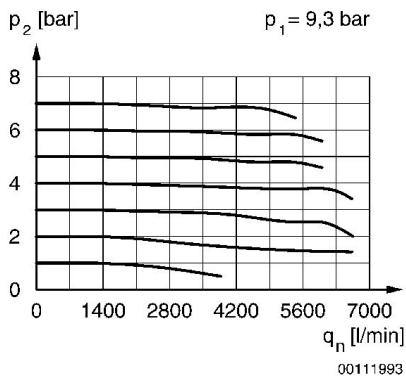


p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

Flow rate characteristic, $p_2 = 0,05 - 3$ bar

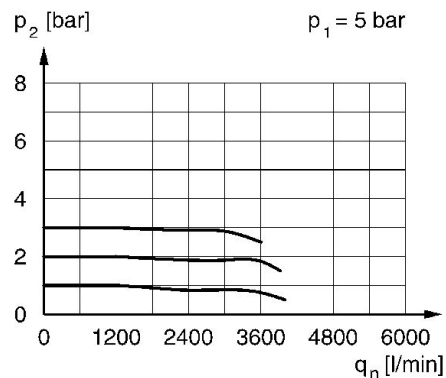


p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

exhaust characteristics (contact limit < 10 mbar)

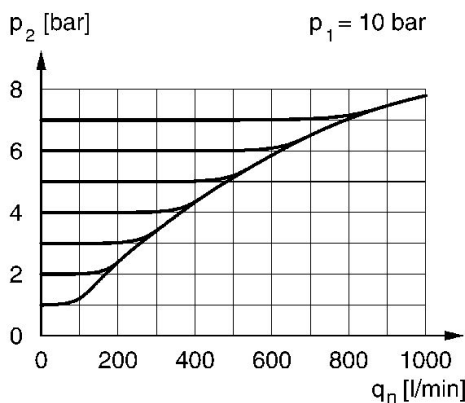

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

control pressure characteristic

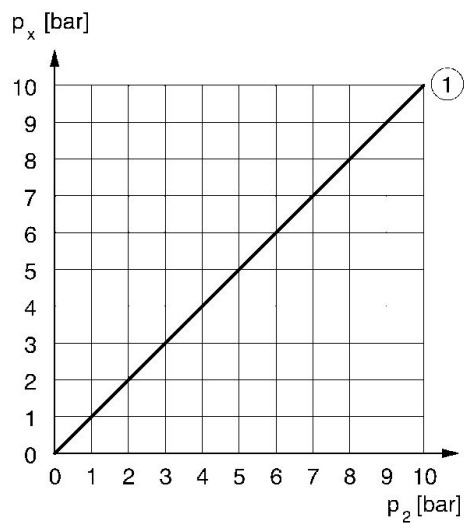

p_x = control pressure
 p_2 = Secondary pressure
 1) Pneumatically operated