


Check-choke valve, Series QR1-DBS

R432002384

General series information
AVENTICS Series QR1 Check-choke-valves

- AVENTICS Series QR1 Check-choke-valve are designed for nominal flows from 60 l/min .. 875 l/min.

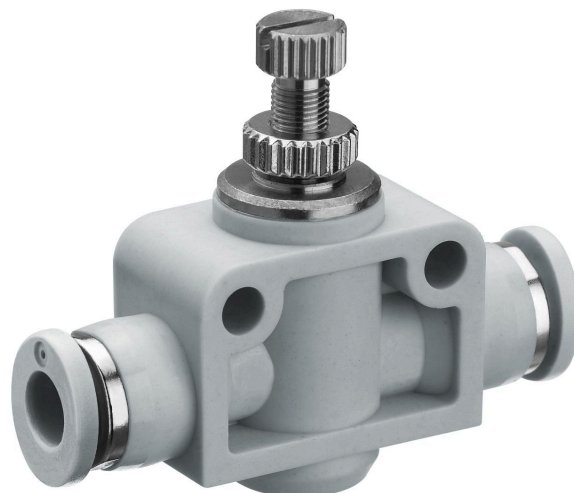

Technical data

Industry	Industrial
Port 1	Ø5/16
direction of throttle	1 > 2
Nominal flow Q _n 1 to 2	60 l/min
Compressed air connection type 1	push-in fitting
Compressed air connection type 2	push-in fitting
Medium	Compressed air
Working pressure min.	0.4827 bar
Working pressure max	10 bar
Min. ambient temperature	0 °C
Max. ambient temperature	60 °C
Min. medium temperature	0 °C
Max. medium temperature	60 °C

Delivery unit 5 piece
Weight 0.09 kg

Material

Housing material Polybutyleneterephthalate
Seal material Acrylonitrile butadiene rubber
Material flow control screw Brass
Surface flow control screw nickel-plated
Part No. R432002384

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions in inches

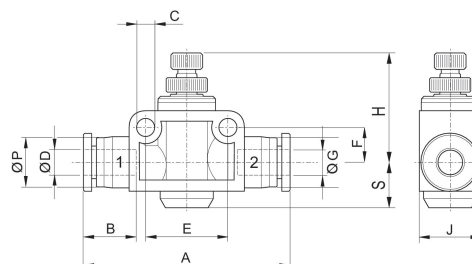

Part No.	Ø D	A	B	Ø C	J	H	S	Ø P
R432002382	Ø5/32	1.426	0.63	3.2	0.394	0.701	0.256	0.411
R432002383	Ø1/4	1.682	0.67	4.3	0.591	1.064	0.433	0.489
R432002384	Ø5/16	2.041	0.729	4.3	0.709	1.123	0.473	0.567
R432002385	Ø 3/8	2.348	0.827	4.3	0.827	1.34	0.473	0.693
R432002386	Ø1/2	2.813	0.887	4.3	1.103	1.32	0.63	0.835