Series QR1-S-MBS Mini

R412005447

General series information AVENTICS Series QR1 Fittings

AVENTICS Series QR1 push-in connectors with easy, secure mounting are available in many versions: for tubing diameters from 3 to 16 mm, as well as in plastic, metal, and stainless steel variants. QR1 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive Oring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.



Technical data

Industry
Fitting type
Compressed air connection type
Port G
Туре
Working pressure min.
Working pressure max
Min. ambient temperature
Max. ambient temperature
Delivery unit

Material

Surface Housing material Part No. Industrial Blanking plug pin bushing Ø 3 QR1-S-MBS -0.95 bar 10 bar 0 °C 60 °C 25 piece


nickel-plated Polybutyleneterephthalate R412005447



Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined

Dimensions

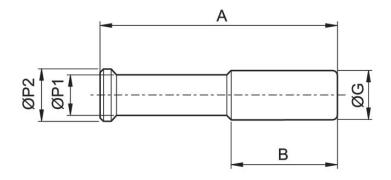

Part No.	Port G	А		Ø P1	Ø P2
R412005447	Ø 3	22	9.5	3	4

