

QR1-S-RDR standard series

R432000055

General series information AVENTICS Series QR1 Fittings

- AVENTICS Series QR1 push-in connectors with easy, secure mounting are available in many versions: for tubing diameters from 3 to 16 mm, as well as in plastic, metal, and stainless steel variants. QR1 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive O-ring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.



Technical data

| | |
|----------------------------------|-----------------------------|
| Industry | Industrial |
| Fitting type | Connection pieces, reducing |
| Compressed air connection type | pin bushing |
| Port G | Ø1/2 |
| Compressed air connection type 2 | pin bushing |
| Port D | Ø 3/8 |
| Type | QR1-S-RDR |
| Working pressure min. | -0.95 bar |
| Working pressure max | 10 bar |
| Min. ambient temperature | 0 °C |
| Max. ambient temperature | 60 °C |
| Delivery unit | 10 piece |
| Weight | 0.005 kg |

Material


| | |
|------------------|---------------------------|
| Surface | nickel-plated |
| Housing material | Polybutyleneterephthalate |
| Part No. | R432000055 |

Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined

These pneumatic components with NPT or inch thread dimensions are only available from our US sales organization.

Dimensions

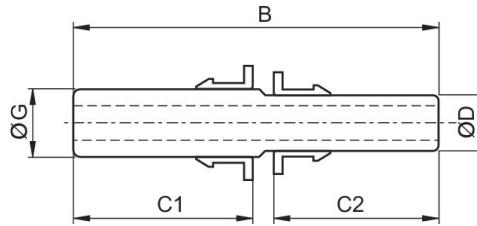

Dimensions in inches

| Part No. | Port D | Port G | A | C1 | C2 |
|------------|--------|--------|------|------|------|
| R432000057 | Ø1/4 | Ø5/32 | 1.42 | 0.67 | 0.63 |
| R432000061 | Ø5/16 | Ø1/4 | 1.54 | 0.73 | 0.67 |
| R432000059 | Ø3/8 | Ø5/16 | 1.69 | 0.83 | 0.83 |
| R432000055 | Ø3/8 | Ø1/2 | 1.89 | 0.89 | 0.89 |