

## AVENTICS Series QR2 Fittings

AVENTICS Series QR2, push-in connectors with easy, secure mounting are available in many versions: In metal for tubing diameters from 3 to 16 mm. QR2 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive O-ring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.



## Technical data


Industry	Industrial
Fitting type	Straight plug connector
Compressed air connection type	push-in fitting
Port G	Ø 8
Type	QR2-C-RSK
suitable for use in food processing	suitable for use in food processing
Min. working pressure	-0.95 bar
Max. working pressure	16 bar
Min. ambient temperature	-20 °C
Max. ambient temperature	150 °C
Delivery unit	2 piece
Weight	0.018 kg

## Material

Housing material	Stainless Steel
Seal material	Fluorocaoutchouc
Material tooth lock washer	Stainless Steel
Material release ring	Stainless Steel
Part No.	R412004984

## Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined

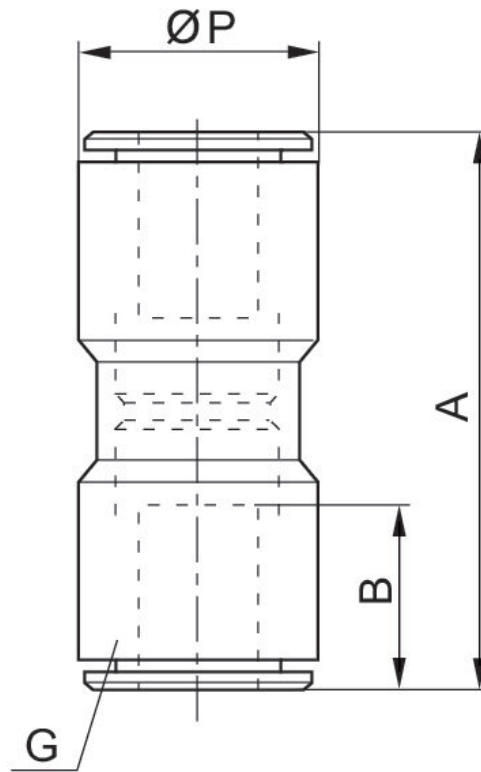

Part No.	Port G	A	B	$\varnothing P$
R412004982	$\varnothing 4$	30	15	9
R412004983	$\varnothing 6$	33	16	11
R412004984	$\varnothing 8$	37	18	13
R412004985	$\varnothing 10$	37	19	15
R412004986	$\varnothing 12$	39	20	17