AVENTICS Series QR2 Fittings

AVENTICS Series QR2, push-in connectors with easy, secure mounting are available in many versions: In metal for tubing diameters from 3 to 16 mm. QR2 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive Oring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.



Technical data
Industry
Fitting type
Compressed air connection type
Port G
Туре
Min. working pressure
Max. working pressure
Min. ambient temperature
Max. ambient temperature
Delivery unit

Material


Housing material Surface housing Seal material Part No. Industrial 3x banjo bolt External thread G 1/4 QR2-S-RH3 -0.95 bar 15 bar -10 °C 70 °C 2 piece

Brass nickel-plated Polyvinyl chloride 1823462066



Technical information

Only applicable in combination with QR2-S and NU2-S series banjo unions. Dimensions

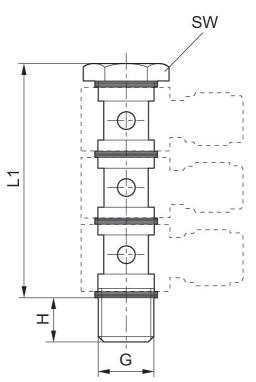

Part No.	Port G	н	L1	SW	Type / Version
1823462065	G 1/8	5,0	55	14	
1823462066	G 1/4	6.5	64	17	
1823391052	G 3/8	7.5	72.5	19	

