


## AVENTICS Series ST9 Magnetic proximity sensors

The AVENTICS Series ST9 sensors are specifically developed for short-stroke cylinders and offer a lean design and practical handling. They slide easily into the 9 mm dovetail nut and can be securely fastened with a single screw. Especially with extremely short cylinders, the electrical connection located at the side of the housing enables easy tightening and removal of the lines.

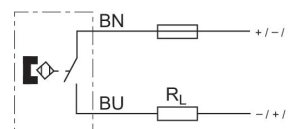

## Technical data

Industry	Industrial
Direct mounting for series	KHZ
Slot width	9 mm groove
Cable	with cable
Type of contact	Reed
Switching capacity	3 W / 5 VA
Protection class	IP67 IP65
Min. ambient temperature	-20 °C
Max. ambient temperature	80 °C
Voltage drop U at I <sub>max</sub>	I*Rs
Protective resistor for reed	1,3 Ω
Max. DC switching current	0.13 A
Max. AC switching current	0.2 A
Switching point precision	±0,1 mT
Electrical connection 2, type	without wire end ferrule, tin-plated
Electrical connection 2, number of poles	2-pin
Min. operating voltage DC	0 V DC
Max. operating voltage DC	24 V DC
Min. operating voltage AC	0 V AC
Max. operational voltage AC	24 V AC
Short circuit resistance	Protected against polarity reversal

# Sensor, Series ST9

0830100320

Sensors,  
Series ST9

2023-10-18

Shock resistance	100 g / 11 ms
Vibration resistance	60 g (50 ... 2000 Hz)
Cable length L	3 m
Cable color	Grey

## Material

Housing material	epoxy resin
Material cable sheath	Polyvinyl chloride
Part No.	0830100320

## Technical information


If reed sensors are used, we recommend using a short-circuit protective device (SCPD).

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

## Dimensions

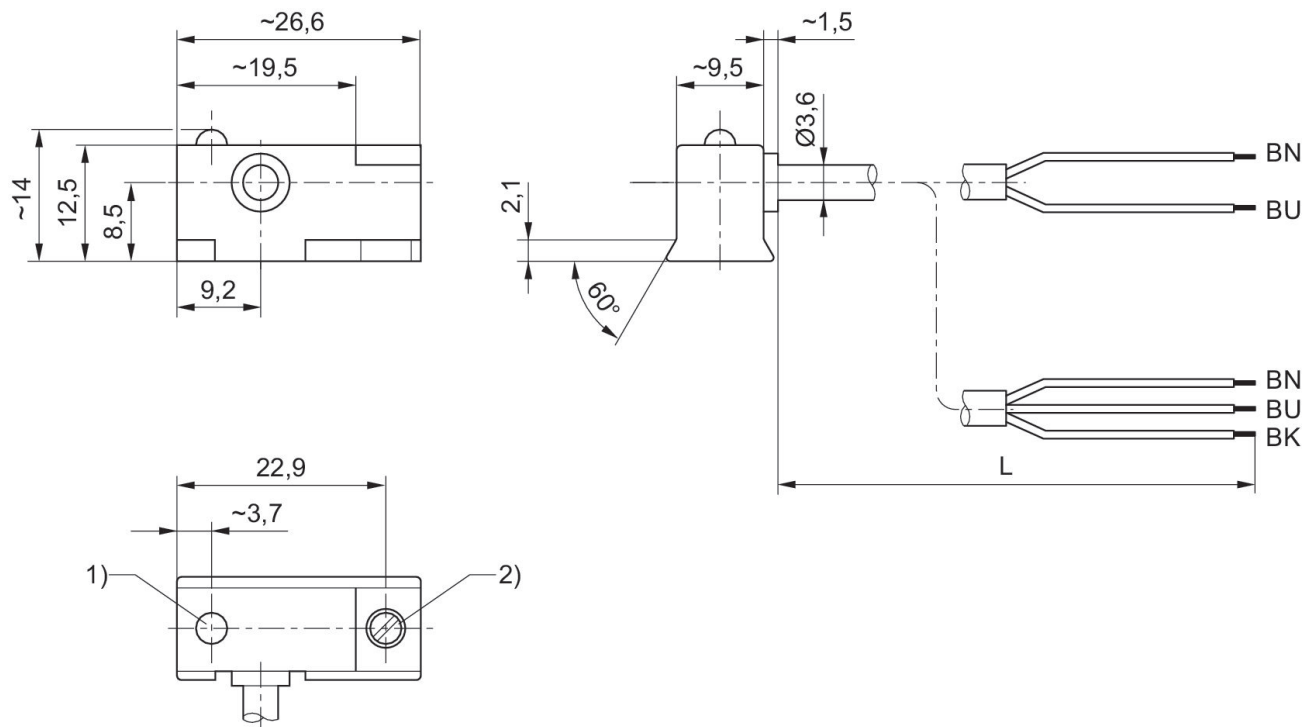

- 1) LED  
2) Clamping screw  
L = cable length  
BN = brown BK = black BU = blue