


## Series TU1 Polyurethane

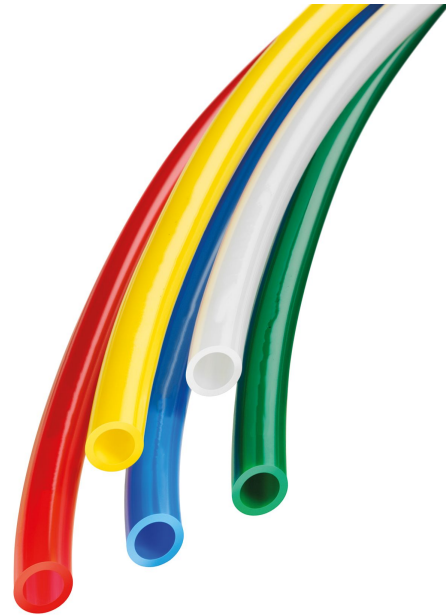

### Technical data

Industry	Industrial
External Ø	4 mm
Wall thickness	0.75 mm
Bending radius min. at 20 °C	12 mm
Color	Translucent red
Min. ambient temperature	-30 °C
Max. ambient temperature	60 °C
Max. working pressure at [[20]°C]	10 bar
suitable for use in food processing	suitable for use in food processing
Delivery unit length	25 m
Weight per meter	0.009 kg
Material	Polyether polyurethane
Part No.	R412009900

# Compressed air tubing, Series TU1-F

R412009900

Series TU1

2024-04-11

---

## Technical information

External calibrated

Suitable for dynamic laying

Approved for food (documented by manufacturer declaration)

Resistant to microbes

Excellent hydrolysis characteristics