


Series TU1 Polyurethane

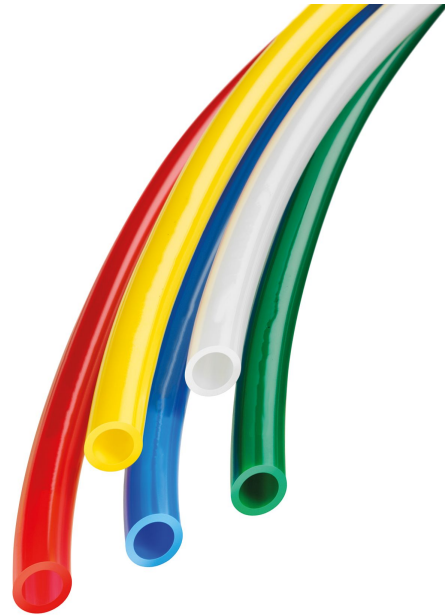


Technical data

Industry	Industrial
Note	suitable for dynamic laying
External Ø	5 mm
Wall thickness	0.95 mm
Bending radius min. at 20 °C	13 mm
Color	Blue
Min. ambient temperature	-30 °C
Max. ambient temperature	80 °C
Max. working pressure at [[20]°C]	10 bar
Delivery unit length	50 m
Weight per meter	0.015 kg
Material	Polyester polyurethane
Part No.	R412009986

Technical information

External calibrated
Suitable for dynamic laying
Halogen-free

Pressure-Temperature-Diagram

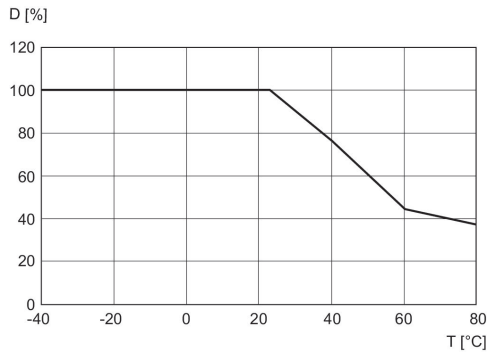

D = pressure resistance T = temperature