


## AVENTICS Series TU2 Compressed air tubings

Polyester polyurethane, Polyether polyurethane, Polyvinyl chloride, Polytetrafluorethylene, Flamex, Polyamide, Polyethylene

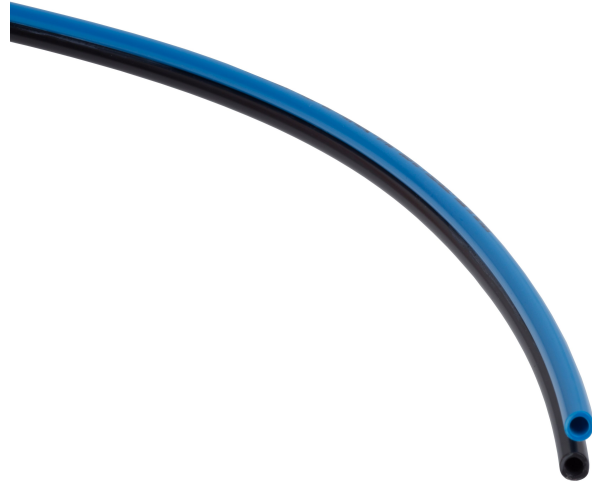

### Technical data

Industry	Industrial
Note	suitable for dynamic laying Continuously bonded
External Ø	4 mm
Wall thickness	0.75 mm
Bending radius min. at 20 °C	12 mm
Color	Black, transparent
Min. ambient temperature	-30 °C
Max. ambient temperature	80 °C
Max. working pressure at [[20]°C]	10 bar
Delivery unit length	100 m
Material	Polyester polyurethane
Part No.	R414010613

### Technical information

External calibrated  
Suitable for dynamic laying  
Halogen-free