


## AVENTICS Series TU2 Compressed air tubings

AVENTICS Series TU2 Duo plastic tubing in PUR are suitable for dynamic laying and can be partially or continuously bonded.

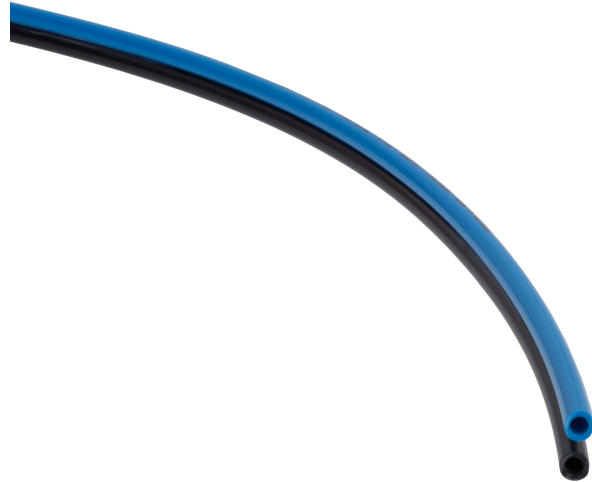

### Technical data

Industry	Industrial
Note	suitable for dynamic laying Continuously bonded
External Ø	4 mm
Wall thickness	0.75 mm
Bending radius min. at 20 °C	12 mm
Color	Blue-black
Min. ambient temperature	-30 °C
Max. ambient temperature	80 °C
Max. working pressure at [[20]°C]	10 bar
Delivery unit length	25 m
Weight per meter	0.018 kg
Material	Polyester polyurethane
Part No.	1820712070

### Technical information

Halogen-free  
Suitable for dynamic laying