


AVENTICS Series TU2 Compressed air tubings

AVENTICS Series TU2 Duo plastic tubing in PUR are suitable for dynamic laying and can be partially or continuously bonded.

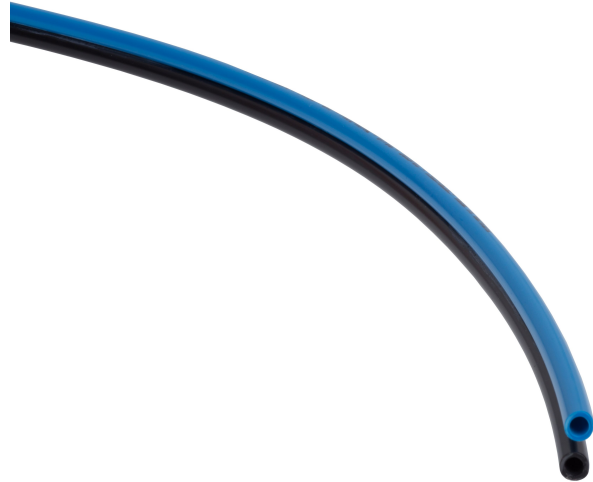

Technical data

| | |
|-----------------------------------|--|
| Industry | Industrial |
| Note | suitable for dynamic laying Continuously bonded |
| External Ø | 4 mm |
| Wall thickness | 0.75 mm |
| Bending radius min. at 20 °C | 12 mm |
| Color | Blue-black |
| Min. ambient temperature | -30 °C |
| Max. ambient temperature | 80 °C |
| Max. working pressure at [[20]°C] | 10 bar |
| Delivery unit length | 100 m |
| Weight per meter | 0.018 kg |
| Material | Polyester polyurethane |
| Part No. | R412014515 |

Technical information

Halogen-free
Suitable for dynamic laying