


AVENTICS Series TU2 Compressed air tubings

AVENTICS Series TU2 Duo plastic tubing in PUR are suitable for dynamic laying and can be partially or continuously bonded.

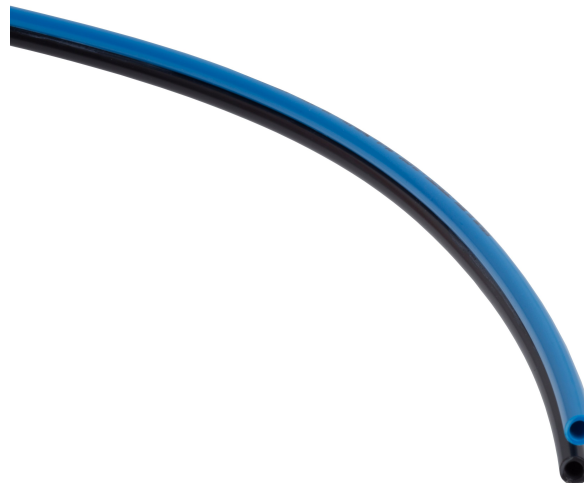

Technical data

Industry	Industrial
Note	suitable for dynamic laying Continuously bonded
External Ø	8 mm
Wall thickness	1.15 mm
Bending radius min. at 20 °C	30 mm
Color	Blue-black
Min. ambient temperature	-30 °C
Max. ambient temperature	80 °C
Max. working pressure at [[20]°C]	10 bar
Delivery unit length	100 m
Weight per meter	0.06 kg
Material	Polyester polyurethane
Part No.	R412014486

Technical information

Halogen-free
Suitable for dynamic laying