


## AVENTICS Series TU2 Compressed air tubings

AVENTICS Series TU2 Duo plastic tubing in PUR are suitable for dynamic laying and can be partially or continuously bonded.

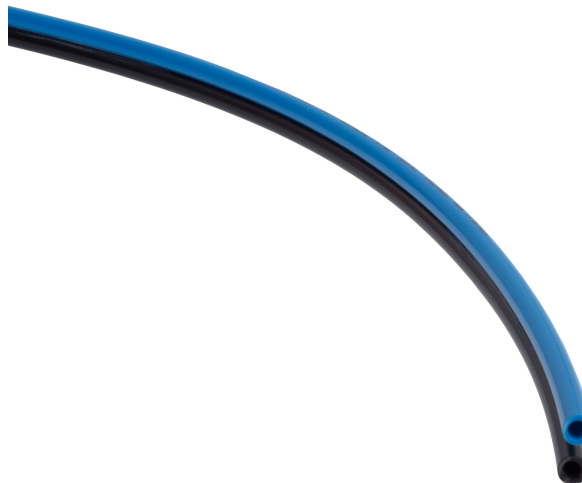

### Technical data

Industry	Industrial
Note	suitable for dynamic laying Continuously bonded
External Ø	10 mm
Wall thickness	1.25 mm
Bending radius min. at 20 °C	45 mm
Color	Blue-black
Min. ambient temperature	-30 °C
Max. ambient temperature	80 °C
Max. working pressure at [[20]°C]	10 bar
Delivery unit length	100 m
Weight per meter	0.084 kg
Material	Polyester polyurethane
Part No.	R412014517

### Technical information

Halogen-free  
Suitable for dynamic laying