


AVENTICS Series TU3 Compressed air tubings

AVENTICS Series TU3 Spiral polyamide Tubing are Halogen-free, Suitable for dynamic laying and benefits of an Excellent UV resistance.

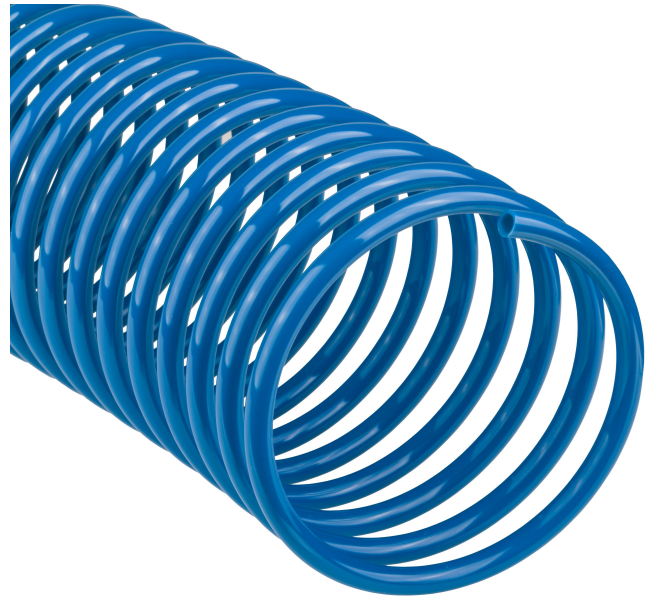

Technical data

Industry

Industrial

Note

Archive product: Do not use in new constructions!
suitable for dynamic laying

External Ø

6 mm

Wall thickness

2 mm

Min. spiral working length

0.159 m

Spiral working length max.

6 m

Spiral internal Ø

102 mm

Color

Blue

Min. ambient temperature

-40 °C

Max. ambient temperature

80 °C

Actual length

8.9 m

Weight per meter

0.068 kg

Material

Polyamide

Part No.

8156060060

Spiral tubing, Series TU3-S-PAM

8156060060

TU3


2024-02-28

Technical information

Halogen-free

Suitable for dynamic laying

Excellent UV resistance

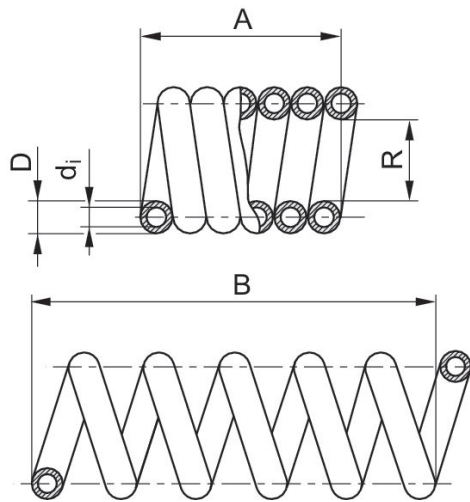

Part No.	D	di	B max.	R	A
8156060060	6 mm	4	6 m	102 mm	0,159 m
8156080060	8 mm	6	6 m	102 mm	0,208 m
8156100060	10 mm	8	6 m	132 mm	0,201 m