
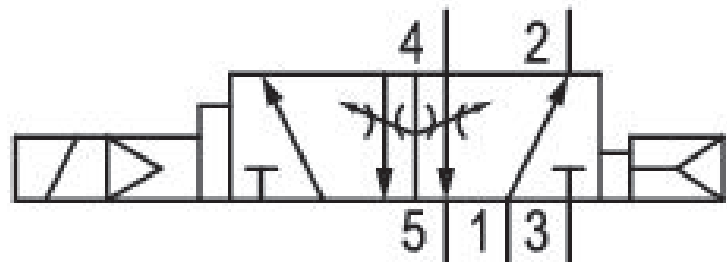


5/2-directional valve, Series 581, size 2

5812671530

ISO 5599-1, size 2, series 581

- $Q_n = 2100 \dots 2700 \text{ l/min}$

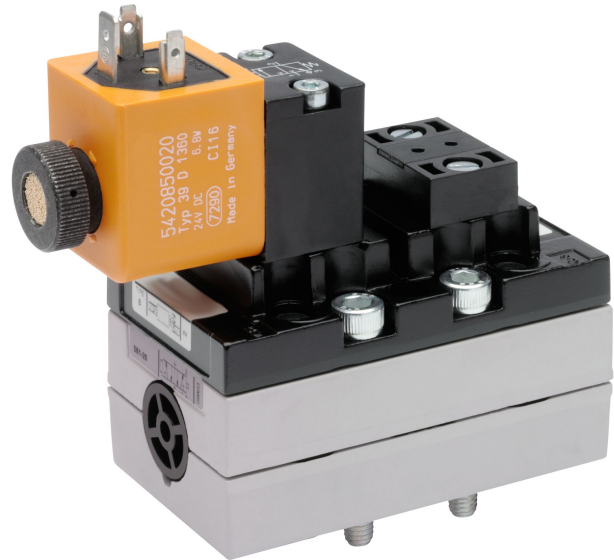

Technical data

Industry
Industrial

Activation
Electrically

Nominal flow Q_n
2700 l/min

Switching principle
5/2

Compressed air connection output
Base plate ISO 5599-1

Working pressure min.
2.7 bar

Working pressure max
16 bar

DC operating voltage
24 V

Voltage tolerance DC
-10% / +10%

Voltage tolerance AC 50 Hz
-10% / +10%

Manual override
without

Electrical connection type
Plug

Electrical connection size
EN 175301-803, form A

Sealing principle
Soft Seal

| | |
|---|---|
| Pilot Internal | Max. ambient temperature 50 °C |
| Standards ISO 5599-1 | Min. medium temperature -15 °C |
| Pilot valve width 30x22 mm CNOMO | Max. medium temperature 50 °C |
| Valve type Spool valve | Medium Compressed air |
| Blocking principle Single base plate principle | Max. particle size 50 µm |
| Connection type Plate connection | Oil content of compressed air min. 0 mg/m ³ |
| Return with air spring return | Oil content of compressed air max. 5 mg/m ³ |
| Compressed air connection input Base plate ISO 5599-1 | Protection class with connection IP65 |
| Compressed air connection, exhaust Base plate ISO 5599-1 | Duty cycle 100 % |
| Compressed air connection pilot exhaust M5 | Typ. switch-on time 17 ms |
| Power consumption DC 6.7 W | Typ. switch-off time 40 ms |
| Flow conductance C 10.8 l/(s*bar) | mounting screws with hexagon socket |
| Throttle with throttle | Mounting screw tightening torque 3.5 Nm |
| Frame size ISO 2 | Weight 0.56 kg |
| Control pressure min. 2.7 bar | Housing material Aluminum |
| Control pressure max. 16 bar | Seal material Acrylonitrile butadiene rubber |
| Min. ambient temperature -15 °C | Part No. 5812671530 |

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

Dimensions

