
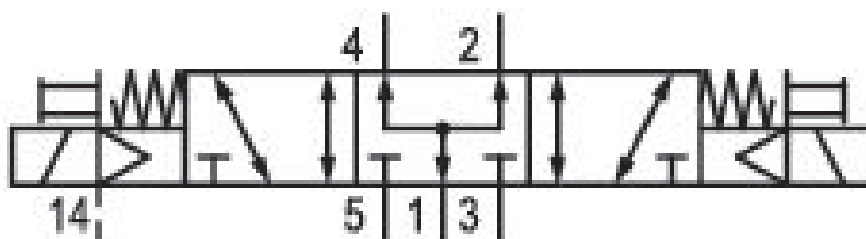


# 5/3-directional valve, Series 581, size 2

## 5812792190

ISO 5599-1, size 2, series 581

■  $Q_n = 2100 \dots 2700$  l/min

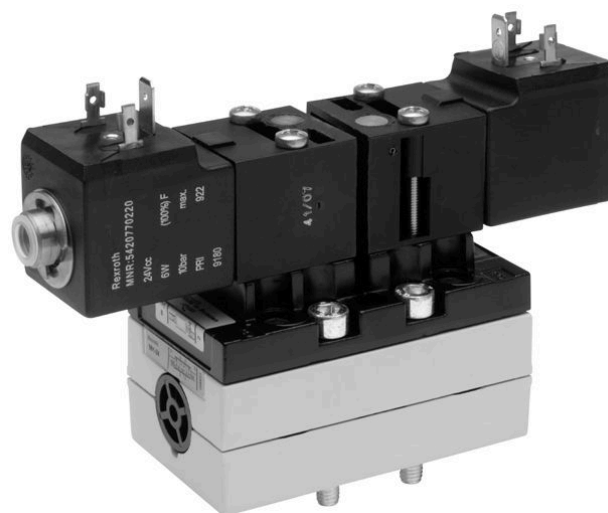

### Technical data

Industry  
Industrial

Activation  
Electrically

Nominal flow  $Q_n$   
2100 l/min

Switching principle  
5/3

Version  
Pressurized Center

Compressed air connection output  
Base plate ISO 5599-1

Working pressure min.  
-0.95 bar

Working pressure max  
10 bar

DC operating voltage  
24 V

Voltage tolerance DC  
-10% / +10%

Manual override  
without detent

Electrical connection type  
Plug

Electrical connection size  
EN 175301-803, form A

Sealing principle  
Soft Seal

Pilot  
External

Standards  
ISO 5599-1

Pilot valve width  
30x30 mm CNOMO

Valve type  
Spool valve

<b>Blocking principle</b> Single base plate principle	<b>Medium</b> Compressed air
<b>Connection type</b> Plate connection	<b>Max. particle size</b> 50 µm
<b>Compressed air connection input</b> Base plate ISO 5599-1	<b>Oil content of compressed air min.</b> 0 mg/m <sup>3</sup>
<b>Compressed air connection, exhaust</b> Base plate ISO 5599-1	<b>Oil content of compressed air max.</b> 5 mg/m <sup>3</sup>
<b>Compressed air connection pilot exhaust</b> G 1/8	<b>Protection class with connection</b> IP65
<b>Power consumption DC</b> 6 W	<b>Duty cycle</b> 100 %
<b>Flow conductance C</b> 8.9 l/(s*bar)	<b>Typ. switch-on time</b> 17 ms
<b>Frame size</b> ISO 2	<b>Typ. switch-off time</b> 36 ms
<b>Control pressure min.</b> 3 bar	<b>mounting screws</b> with hexagon socket
<b>Control pressure max.</b> 10 bar	<b>Mounting screw tightening torque</b> 3.5 Nm
<b>Min. ambient temperature</b> -15 °C	<b>Weight</b> 0.79 kg
<b>Max. ambient temperature</b> 50 °C	<b>Housing material</b> Aluminum
<b>Min. medium temperature</b> -15 °C	<b>Seal material</b> Acrylonitrile butadiene rubber
<b>Max. medium temperature</b> 50 °C	<b>Part No.</b> 5812792190

## Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

## Dimensions

