
- · Light and robust valves
- Various mechanical actuating controls
- · panel installation

Series AP Directional valves

The AVENTICS Series AP offers a wide range of poppet valves with aluminium housing. With many actuation control versions available (roller, lever, pedal, push-button or plunger) the AP Series is the universal solution for automation systems and panel installation.





Technical data Industry Activation Valve type Plate connection Actuating element

Compressed air connection type Compressed air connection input Compressed air connection output Compressed air connection, exhaust Nominal flow Qn Min. working pressure Max. working pressure Min. ambient temperature Max. ambient temperature Min. medium temperature Max. medium temperature Max. medium temperature Medium Min. oil content of compressed air Industrial Mechanical Poppet valve Pipe connection Pedal, with detent

Internal thread G 1/4 G 1/4 550 I/min 0 bar 10 bar -30 °C 80 °C -30 °C 80 °C Compressed air 0 mg/m³



0820401008

Max. oil content of compressed air Max. particle size	5 mg/m³ 5 μm
Weight	1.42 kg
Material Housing material Seal material Material actuating control Part No.	Aluminum Acrylonitrile butadiene rubber Aluminum 0820401008

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.


The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in https://www.emerson.com/en-us/support).



0820401008

Dimensions in mm

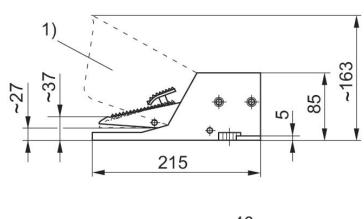


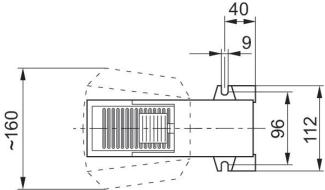

¹⁾ optional protective cover, part number 1828104002



Actuating force+

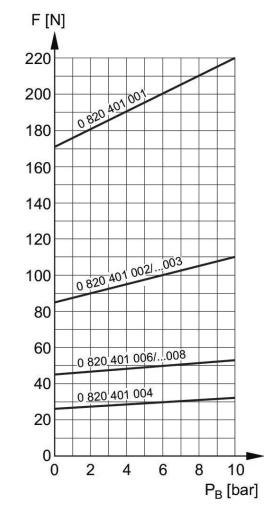

F = actuating force P_B = Working pressure

