

## Plastic tubing PFAN

**FESTO**



## Characteristics

### At a glance



Particularly resistant to chemicals, cleaning processes, extreme temperatures and pressure. Perfect for use in the food industry, e.g. in meat processing.

- Perfluoroalkoxyalkane
- Pneumatic tubing with resistance to high temperatures and chemicals
- For food-safe grade, see [www.festo.com/certificates/PFAN](http://www.festo.com/certificates/PFAN)
- High resistance to chemicals, microbes, UV radiation, hydrolysis and stress cracks
- Operating medium: compressed air, vacuum, water

### Diagrams

Further information → [pfan](#)



The diagrams shown in this document are also available online. These can be used to display precise values.

### Pipe/tubing O.D. x wall thickness

For standard O.D. tubing, the outside diameter of the tube and the wall thickness are given as the tube size.

### Packaging unit [m]

Standard: 50 m

## Type code

001	Series
PFAN	Plastic tubing

003	Colour
NT	Natural

002	Pipe/tubing O.D. x wall thickness
3x0,5	3x0.5 mm
4x0,75	4x0.75 mm
6x1	6x1 mm
8x1,25	8x1.25 mm
10x1,5	10x1.5 mm
12x1,75	12x1.75 mm


Datasheet

Operating and environmental conditions						
Outside diameter	3 mm	4 mm	6 mm	8 mm	10 mm	12 mm
Inside diameter	2.3 mm	2.9 mm	4 mm	5.9 mm	7 mm	8.4 mm
Pneumatic connection	For push-in connector outside diameter of 3 mm For barbed fitting inside diameter of 2 mm	For push-in connector O.D. 4 mm For barbed fitting I.D. 3 mm with union nut For barbed fitting I.D. 3 mm	For push-in connector O.D. 6 mm For barbed fitting I.D. 4 mm with union nut For barbed fitting I.D. 4 mm	For push-in connector O.D. 8 mm For barbed fitting inside diameter of 6 mm with union nut For barbed fitting inside diameter of 6 mm	For push-in connector O.D. 10 mm	For push-in connector outside diameter of 12 mm
Flow-relevant bending radius	30 mm	37 mm	50 mm	110 mm	140 mm	165 mm
Min. bending radius	10 mm	11 mm	12 mm	25 mm	22 mm	29 mm
Temperature-dependent operating pressure	-0.095 ... 1.5 MPa		-0.095 ... 1.6 MPa		-0.095 ... 1.6 MPa	
Temperature-dependent operating pressure	-0.95 ... 15 bar		-0.95 ... 16 bar		-0.95 ... 16 bar	
Temperature-dependent operating pressure	-13.775 ... 217.5 psi		-13.775 ... 232 psi		-13.775 ... 232 psi	
Operating pressure complete temperature range	-0.095 ... 0.6 MPa		-0.095 ... 0.7 MPa		-0.095 ... 0.7 MPa	
Operating pressure complete temperature range	-0.95 ... 6 bar		-0.95 ... 7 bar		-0.95 ... 7 bar	
Operating pressure complete temperature range	-13.775 ... 87 psi		-13.775 ... 101.5 psi		-13.775 ... 101.5 psi	
Note on operating pressure	Water: max. 0.6 MPa at 0 - 85°C Water vapour: 0 – 0.15 MPa, 0 – 1.5 bar, 0 – 22 psi					
Operating medium <sup>1)</sup>	Compressed air to ISO 8573-1:2010 [7:-:-] Water (liquid, ice-free) Water vapour					
Note on temperature of medium	Water vapour: max. 120°C					
Suitable for use with food <sup>2)</sup>	See supplementary material information, See declaration of conformity					
Ambient temperature	-20 ... 150°C					
Fire test material	UL94 V-0					
Approval	–					

1) More information [www.festo.com/catalogue/pfan](http://www.festo.com/catalogue/pfan) → Support/Downloads.

2) More information [www.festo.com/catalogue/pfan](http://www.festo.com/catalogue/pfan) → Support/Downloads.

Operating pressure p as a function of temperature t

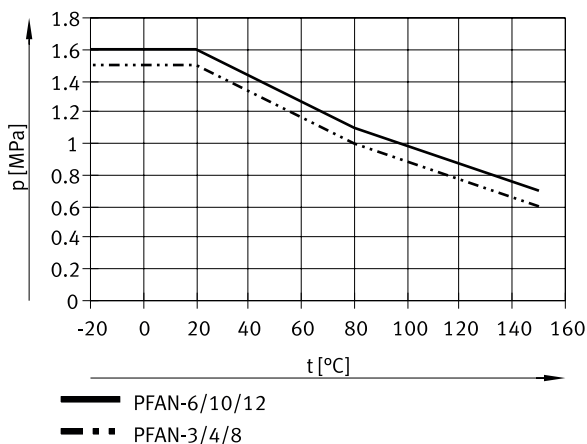


## Datasheet

Materials	
Shore hardness	D 60 +5
Material tubing	PFA
Note on materials <sup>1)</sup>	RoHS-compliant
LABS (PWIS) conformity	VDMA24364-B2-L
Cleanroom class	Element installed statically, no meaningful evaluation possible according to ISO 14644-1
Instructions on use	Tubing without printing

1) Tubing without printing

## Ordering data

Ordering data						
	Outside diameter	Packaging unit [m] <sup>1)</sup>	Product weight according to length	Colour	Part no.	Type
	3 mm	Standard	0.007 kg/m	Natural	<b>8061167</b>	<b>PFAN-3X0,5-NT</b>
	4 mm		0.012 kg/m		<b>197061</b>	<b>PFAN-4X0,75-NT</b>
	6 mm		0.034 kg/m		<b>197062</b>	<b>PFAN-6X1-NT</b>
	8 mm		0.049 kg/m		<b>197063</b>	<b>PFAN-8X1,25-NT</b>
	10 mm		0.087 kg/m		<b>197064</b>	<b>PFAN-10X1,5-NT</b>
	12 mm		0.125 kg/m		<b>197065</b>	<b>PFAN-12X1,75-NT</b>

1) Standard: 50 m