



## Dx50-2

The new era in distance measurement


**SICK**  
Sensor Intelligence.

## Advantages



## Dx50-2 – infinite possibilities – finally available

With the measurement technology, which has been optimized in contrast to the Dx50, combined with the most advanced micro-controller technology, SICK is offering a mid range distance sensor which adapts to the given market requirements. The Dx50-2 solves tasks which were previously considered unsolvable.

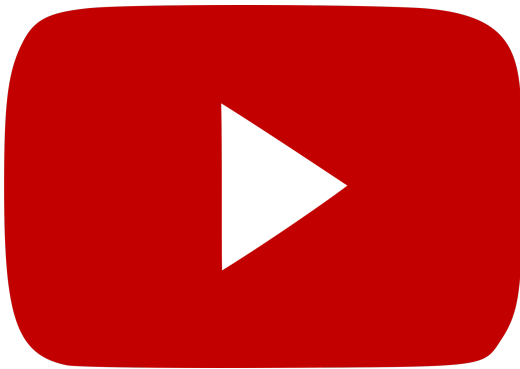

A scanning range like no other and high speed in a compact design with the second generation of Dx50 mid range distance sensors



### HDDM and HDDM+ technology

The unique HDDM technology from SICK is a milestone in the development of distance sensor technology. In doing so, the sensor uses the runtime of several laser pulses from the sensor in the direction of the measuring object and back to calculate the distance between the two. This enables stable and gap-free scanning as well as reliable measurement results. And all of this even in dirty, dusty and moist environments.




#### Higher speed

Measurement and output frequencies of up to three kilohertz enable reliable integration of the Dx50-2, even into very fast processes.



#### Extended measuring range

Driven by the growing e-commerce business, more logistics hubs are being built worldwide, and ports are being extended or newly built. To face these changes, the measuring range of the Dx50-2 has been increased once again. In combination with the newly-developed optical unit, the sensor enables fault-free positioning of factory and harbor cranes and is perfectly suited for position and distance measurements in classical logistics, to name a couple of examples.

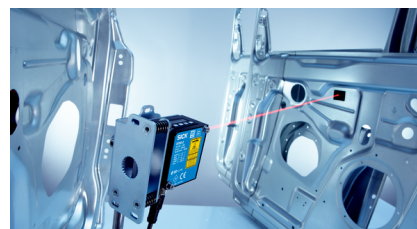

#### Excellent accuracy

Ever-increasing quality requirements and quicker processes in the automation industry push the distance sensor to the boundaries of feasibility. The Dx50-2 was designed to sustainably meet the requirements on precision and throughput.




**The Dx50-2 was developed to increase productivity and is always the right choice when you need a bit higher measurement performance.**




**The Dx50-2 distance sensors can be used for the most challenging stationary and mobile applications:**


- Positioning of track-bound vehicles, gripper arms and crane systems
- Collision avoidance in ports and intralogistics
- Quality control and process monitoring in the automotive industry

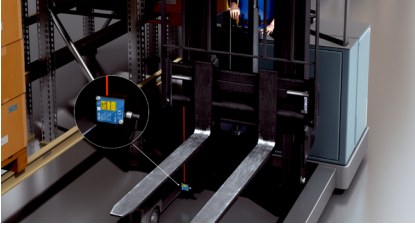

Indestructible: Slip- and wear-free measurement of stroke height

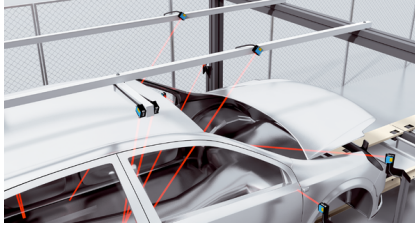

Essential: Efficient quality control thanks to the smallest light spot geometry and high measurement accuracy

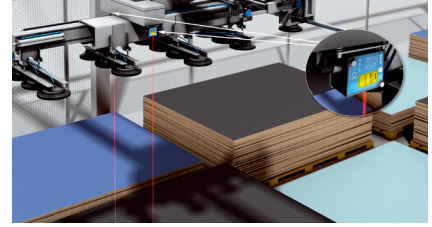

Unbeatable: Location and position determination down to the last millimeter, regardless of the environment



**Noticeably more performance for complex tasks in the mid range distance sensor segment.**



As co-founder of IO-Link, SICK offers one of the broadest IO-Link portfolios on the market. Smart Sensors with IO-Link generate and receive data and information which goes beyond conventional switching signals or measured process parameters. This allows them to create substantial increases in efficiency, more flexibility, and better planning security for predictive maintenance of machines and systems. Benefit from SICK's extensive experience with a wide range of sensing technologies, and now also in combination with the SIG100 and SIG200 Sensor Integration Gateways.

To find out more on the topic of "IO-Link", speak to your contact person at SICK or [click here](#).



**The IO link allows you to use a simple output signal switching device as a communication interface. This enables quick batch changes and simple commissioning, maintenance and diagnostics.**

## SICK LifeTime Services

**SICK's services increase machine and plant productivity, enhance the safety of people all over the world, provide a solid foundation for a sustainable business operation, and protect investment goods. In addition to its usual consulting services, SICK provides direct on-site support during the conceptual design and commissioning phases as well as during operation.**

**The range of services not only covers aspects like maintenance and inspection, but also includes performance checks as well as upgrades and retrofits. Modular or customized service contracts extend the service life of plants and therefore increase their availability. If faults occur or limit values are exceeded, these are detected at all times by the corresponding sensors and systems.**



### Consulting and design

Application-specific advice on the product, its integration and the application itself.



### commissioning and maintenance

Application-optimized and sustainable — thanks to professional commissioning and maintenance by a trained SICK service technician.



### service contracts

Extended warranty, SICK Remote Service, 24-hour helpdesk, maintenance, availability guarantees and other modular components can be individually combined on request.





Technical data overview

<b>Resolution</b>	≥ 0.1 mm
<b>Repeatability</b>	≥ 0.5 mm
<b>Response time</b>	0.83 ms ... 150 ms, 0.83 ms / 3.33 ms / 8.33 ms / 25 ms / 75 ms, 1.67 ms / 6.67 ms / 16.67ms / 50 ms / 150 ms <sup>1) 2)</sup> (depending on type)
<b>Output time</b>	0.33 ms/1.33 ms/3.33 ms/10 ms/30 ms, 0.67 ms / 2.67 ms / 6.67 ms / 20 ms / 60 ms <sup>1) 3)</sup>
<b>Switching frequency</b>	1,000 Hz/250 Hz/100 Hz/33 Hz/11 Hz <sup>1) 2)</sup> 500 Hz / 125 Hz / 50 Hz / 16.6 Hz / 5.5 Hz <sup>1) 2)</sup>
<b>Analog output</b>	4 mA ... 20 mA, ≤ 450 Ω V ... 10 V, ≥ 50,000 Ω
<b>Digital output</b>	Type Push-pull: PNP/NPN
<b>IO-Link</b>	✓, IO-Link V1.1, COM3 (230,4 kBaud)
<b>Enclosure rating</b>	IP65 IP67
<b>Ambient temperature, operation</b>	-40 °C ... +65 °C, U <sub>v</sub> ≤ 24 V -30 °C ... +80 °C, operation with 2 cooling plates -30 °C ... +140 °C, operation with 2 cooling plates and protection filter

1) Depending on the set speed: Super Fast ... Super Slow.  
 2) Lateral entry of the object into the measuring range.  
 3) Continuous change of distance in measuring range.

Product description

SICK is once again setting the standard in the field of distance sensors with the new generation of Dx50-2 sensors, which provide the perfect combination of measurement performance and size. Based on the patented and improved HDDM™ time-of-flight technology, the new product family supports precise and reliable measuring, with ranges of up to 10 m on black targets and up to 30 m on white targets. The Dx50-2 sensors feature an intuitive display, saving time during installation and commissioning. The high output rate of the sensors delivers up to 3,000 distance values per second for maximum throughput and process quality. The Dx50-2 sensors have a rugged housing and provide reliable operation despite extreme temperatures and harsh ambient conditions. Since the settings for speed, sensing range, and repeatability can be adjusted to meet current requirements, the Dx50-2 sensors can be customized to suit each and every possible application.

At a glance

- Measuring range up to 10 m on black targets and up to 30 m on white targets, compact dimensions
- Output rate up to 3,000/s
- Repeatability: 0.5 mm to 5 mm
- Reliable, patented HDDM time-of-flight technology
- Withstands extreme temperatures from -40 °C to +65 °C thanks to rugged metal housing
- Shape comparison integrated in sensor
- IO-Link, analog and digital output
- Display with intuitive operation and easy-teach option
- Enclosure rating IP 65 and IP 67

## Your benefits

- A wide measuring range and a compact housing increase the number of possible applications
- Very high throughput thanks to a high measuring frequency
- Precise and reliable measurement regardless of object color improves uptime and process quality
- Reliably withstands harsh ambient conditions thanks to its rugged design, a wide range of operating temperatures, and ambient light immunity
- Integrated shape comparison for straightforward checking and sorting of objects
- Time savings thanks to quick and easy commissioning by means of intuitive operating structure of the display, easy-teach option
- Full process control with IO-Link from commissioning to maintenance
- Three switching modes provide a simple solution for demanding applications

## Fields of application

- Metal and steel industry: measurement of coils and rolls
- Transportation and logistics: collision avoidance in container ports
- Automobile industry: positioning of robots
- Metal and steel industry: detection and measurement of hot materials

## Ordering information

Other models and accessories → [www.sick.com/Dx50-2](http://www.sick.com/Dx50-2)

- **Communication interface:** IO-Link
- **Measuring range:** 200 mm ... 30,000 mm, 90% remission factor, 200 mm ... 17,000 mm, 18 % remission, 200 mm ... 10,000 mm, 6% remission factor
- **Laser class:** 2

Light source	Minimum response time	Digital output	Type of analog output	Type	Part no.
Laser, red <sup>1)</sup>	0.83 ms	1 ... 2 x push-pull: PNP/NPN	Current output / voltage output	DT50-2B215252	1065661

<sup>1)</sup> Wavelength: 658 nm; max. output: 250 mW; pulse duration: 3 ns; duty cycle: 1/250.

- **Communication interface:** IO-Link
- **Measuring range:** 200 mm ... 30,000 mm, 90% remission factor, 200 mm ... 17,000 mm, 18 % remission, 200 mm ... 10,000 mm, 6% remission factor
- **Laser class:** 1

Light source	Minimum response time	Digital output	Type of analog output	Type	Part no.
Laser, red <sup>1)</sup>	1.67 ms	1 ... 2 x push-pull: PNP/NPN	Current output / voltage output	DT50-2B215552	1075271

<sup>1)</sup> Wavelength: 658 nm; max. output: 250 mW; pulse duration: 3 ns; duty cycle: 1/666.

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)