

LFV230-XXHCNIPM0200

LFV200

LEVEL SENSORS





Ordering information

Туре	Part no.
LFV230-XXHCNIPM0200	6066423

Other models and accessories → www.sick.com/LFV200

Illustration may differ



Detailed technical data

Features

Medium	Fluids
Measurement	Switch
Probe length	200 mm
Process pressure	-1 bar 64 bar
Process temperature	-40 °C +150 °C
Fill material density	0.7 g/cm ³ 2.5 g/cm ³
IO-Link	✓
EHEDG approval	✓

Performance

Accuracy of sensor element	± 2 mm
Reproducibility	≤ 1 mm
Viscosity	0.1 mPas 10,000 mPas
Resolution	≤ 1 mm
Response time	500 ms
MTBF	1,25*10^7 h

Electronics

Communication interface	IO-Link
Supply voltage	18 V DC 30 V DC
Residual ripple	≤ 5 V _{pp}
Power consumption	< 10 mA
Initialization time	< 2 s
VDE protection class 2	√
Connection type	M12 round connector x 1, 4-pin
Output signal	Transistor output PNP with IO-Link
Hysteresis	2 mm

Output current	< 250 mA
Inductive load	≤1H
Capacitive load	100 nF
Enclosure rating	IP67
Temperature drift	0.03 mm/K

Mechanics

Wetted parts	Stainless steel 1.4404 (Ra ≤ 0,8 µm)
Process connection	Triclamp 2" (PN 16, 316L, Ra < 0.8μm)
Housing material	Stainless steel 1.4404, PEI

Ambient data

Ambient operating temperature	-40 °C +70 °C
Ambient temperature, storage	-40 °C +80 °C


Classifications

ASS 5.1.4 272	73202
ASS 6.0 272	73202
ASS 6.2 272	73202
ASS 7.0 272	73202
ASS 8.0 272	73202
ASS 8.1 272	73202
ASS 9.0 272	73202
ASS 10.0 272	73202
ASS 11.0 272	73202
ASS 12.0 272	73106
1 5.0 ECO	02654
// 6.0 ECO	02654
17.0 ECO	02654
1 8.0 ECO	02654
PSC 16.0901 411	11938

Type code

LFV230 type code


Certification XX XA Overfill protection in acc. with WHG (German Federal Water Act) Execution / Process temperature S Standard / -40 °C ... +100 °C T Expanded / -40 °C ... +150 °C H Hygiene applications / -40 °C ... +150 °C Process connection / Material GB G 3/4 A, PN 64 / 316L NB 3/4" NPT, PN 64 / 316L GA G 1 A, PN 64 / 316L 1" NPT, PN 64 / 316L 1" NPT, PN 64 / 316L

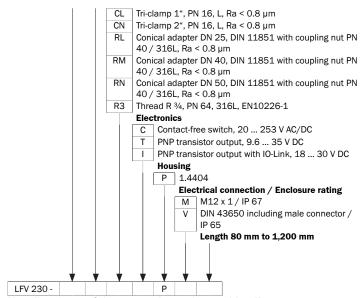


Not all variants of the type code can be combined!

Dimensional drawing (Dimensions in mm (inch))


Dimensional drawing

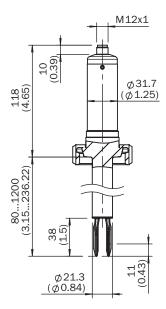

Dimensional drawing

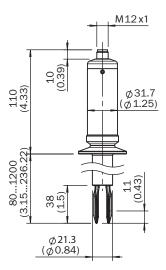

Dimensional drawing housing



Recommended accessories

Other models and accessories → www.sick.com/LFV200

	Brief description	Туре	Part no.
Flanges			
	Welded flange/welded connector, DIN11851-1, DN25 / PN40, Stainless steel 1.4404	BEF-FL-851D25-LFV2	5321527
	Welded flange/welded connector DIN11851-1, DN40 / PN40, Stainless steel 1.4404	BEF-FL-851D40-LFV2	5321459
	Welded flange/welded connector DIN11851-1, DN50 / PN25, Stainless steel 1.4404	BEF-FL-851D50-LFV2	5321528
50	Welded flange/welded connector, process connection G 1, Stainless steel 1.4404	BEF-FL- GEWG10-LFV2	4054605
	Welded flange/welded connector, G 3/4 process connection, Stainless steel 1.4404	BEF-FL- GEWG34-LFV2	4054604
	Welded flange/welded connector, process connection Tri-Clamp 1", Stainless steel 1.4404	BEF-FL-TCLI10-LFV2	5321678
	Welded flange/welded connector, process connection Tri-Clamp $2"$, Stainless steel 1.4404	BEF-FL-TCLI20-LFV2	5321679

LFV230-XXHCNIPM0200 | LFV200

LEVEL SENSORS

Recommended services

Additional services → www.sick.com/LFV200

	Туре	Part no.
Function Block Factory		
 Description: The Function Block Factory is an engineering tool for creating device and environment-specific function blocks that enable IO-Link sensors to be integrated into programmable logic controllers. The Function Block Factory supports common programmable logic controllers (PLCs) of various manufacturers such as Siemens, Beckhoff, Rockwell Automation B&R and more. More information on the FBF can be found here . Provision: Customers can obtain access to the Function Block Factory and the license via https://fbf.cloud.sick.com 	Function Block Factory	On request

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

