

# LL3-DH01

Fiber-optic cables

FIBERS

**SICK**  
Sensor Intelligence.



### Ordering information

Type	Part no.
LL3-DH01	5308091

Other models and accessories → [www.sick.com/Fiber-optic\\_cables](http://www.sick.com/Fiber-optic_cables)

### Detailed technical data

#### Features

<b>Device type</b>	Fiber-optic cables
<b>Functional principle</b>	Proximity system
<b>Fiber-optic head design</b>	Threaded sleeve
<b>Application</b>	Heat-resistant ( $\geq 100^\circ\text{C}$ )
<b>Compatible fiber-optic amplifiers</b>	WLL80, WLL180, GLL170(T)
<b>Sensing range max.</b>	1,460 mm (Sensing range of WLL80 at 8 ms)
<b>Minimal object diameter</b>	0.015 mm <sup>1)</sup>
<b>Optical fiber head</b>	
Angle of dispersion	60°
Integrated lens	No
Compatibility tip adapters	No
<b>Optical fiber</b>	
Adapter end sleeves required	No
<b>Included with delivery</b>	Mounting, 2 x M6 hexagon nut, 2 x washer, FC fiber cutter (5304141)

<sup>1)</sup> Minimum detectable object was determined at optimum measuring distance and optimum setting.

#### Mechanics

<b>Optical fiber head</b>	
Light emission	Axial
Thread diameter (housing)	M6
Optical fiber taper diameter	$\geq 4.9$ mm
Optical fiber taper length after 2 mm	$\geq 3$ mm
<b>Optical fiber</b>	
Fiber length	2,000 mm
Bending radius	35 mm
Dynamic flexibility (robotics)	No
Outside diameter, optical fiber cable connection	2.2 mm
Fiber arrangement	Singlefiber
Core structure	2 x $\emptyset$ 1,5 mm <sup>1)</sup> Singlefiber
<b>Material</b>	
Optical fiber head	Stainless steel 1,4305

<sup>1)</sup> C = Coaxial, S = Sender, E = Receiver.

	Sheath	Fluorethylenpropylen (FEP)
	Fibers	Polymethylmethacrylat (PMMA)
<b>Weight</b>		44 g

<sup>1)</sup> C = Coaxial, S = Sender, E = Receiver.

#### Ambient data

<b>Ambient operating temperature</b>	-40 °C ... +180 °C
--------------------------------------	--------------------

#### Classifications

<b>ECLASS 5.0</b>	27270905
<b>ECLASS 5.1.4</b>	27270905
<b>ECLASS 6.0</b>	27270905
<b>ECLASS 6.2</b>	27270905
<b>ECLASS 7.0</b>	27270905
<b>ECLASS 8.0</b>	27270905
<b>ECLASS 8.1</b>	27270905
<b>ECLASS 9.0</b>	27270905
<b>ECLASS 10.0</b>	27270905
<b>ECLASS 11.0</b>	27270905
<b>ECLASS 12.0</b>	27270905
<b>ETIM 5.0</b>	EC002651
<b>ETIM 6.0</b>	EC002651
<b>ETIM 7.0</b>	EC002651
<b>ETIM 8.0</b>	EC002651
<b>UNSPSC 16.0901</b>	39121528

#### Sensing ranges with WLL80

<b>Operating mode 16 µs</b>	175 mm
<b>Operating mode 70 µs</b>	485 mm
<b>Operating mode 250 µs</b>	675 mm
<b>Operating mode 500 µs</b>	790 mm
<b>Operating mode 1 ms</b>	865 mm
<b>Operating mode 2 ms</b>	1,090 mm
<b>Operating mode 8 ms</b>	1,460 mm

#### Sensing ranges with WLL180T

<b>Operating mode 16 µs</b>	120 mm
<b>Operating mode 70 µs</b>	350 mm
<b>Operating mode 250 µs</b>	600 mm
<b>Operating mode 2 ms</b>	980 mm
<b>Operating mode 8 ms</b>	1,500 mm
<b>Note</b>	Sensing ranges related to fiber-optic sensors with type of light: visible red light

#### Sensing ranges with GLL170



<b>Operating mode 250 µs</b>	150 mm
------------------------------	--------

### Sensing ranges with GLL170T

<b>Operating mode 50 <math>\mu</math>s</b>	180 mm
<b>Operating mode 250 <math>\mu</math>s</b>	320 mm


### Dimensional drawing (Dimensions in mm (inch))

LL3-DH01

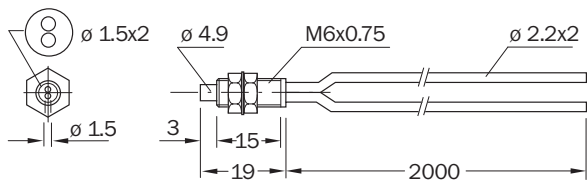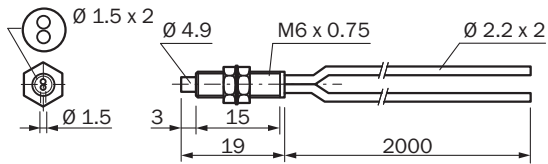

### Recommended accessories

Other models and accessories → [www.sick.com/Fiber-optic\\_cables](http://www.sick.com/Fiber-optic_cables)

	Brief description	Type	Part no.
Device protection (mechanical)			
	Metal protection hose for LL3-Fibers with M6 threaded head; length 1000 mm, stainless steel, 1 pieces	BEF-LL3M61000	5331291
	Metal protection hose for LL3-Fibers with M6 threaded head; length 500 mm, stainless steel, 1 pieces	BEF-LL3M6500	5331290

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)