

# OD5-150T40

OD Precision

DISPLACEMENT MEASUREMENT SENSORS

**SICK**  
Sensor Intelligence.



## Ordering information

Type	Part no.
OD5-150T40	6049579

Other models and accessories → [www.sick.com/OD\\_Precision](http://www.sick.com/OD_Precision)



## Detailed technical data

### Features

<b>System part</b>	Sensor head
<b>Measuring range</b>	110 mm ... 190 mm <sup>1)</sup>
<b>Target</b>	Natural objects
<b>Repeatability</b>	2 μm <sup>2)</sup>
<b>Linearity</b>	± 40 μm <sup>2)</sup>
<b>Response time</b>	≥ 0.1 ms <sup>3) 4)</sup>
<b>Output time</b>	≥ 0.1 ms
<b>Light source</b>	Laser, red visible red light
<b>Type of light</b>	Visible red light
<b>Laser class</b>	2 (IEC 60825-1:2014, EN 60825-1:2014) <sup>5)</sup>
<b>Typ. light spot size (distance)</b>	Ø 180 μm (150 mm)
<b>General notes</b>	Note on use OD Precision sensor head can be used in combination with AOD5-P/N1 or stand-alone via RS-422, OD5-150xxx is compatible with AOD5 hardware version 1.7. and software version 4.3 (correspond with production date from Lot 1338)
<b>Safety-related parameters</b>	MTTF <sub>D</sub> 101 years DC <sub>avg</sub> 0%

<sup>1)</sup> 6 % ... 90 % remission; at default settings.

<sup>2)</sup> Measurement at 90% remission (ceramic, white), or mirror for OD5-25x; averaging set to: 256 or 4096 for OD5-25x; constant ambient conditions.

<sup>3)</sup> Time needed for automatic sensitivity adjustment is calculated as: sampling period x 20. At default setting 100 μs (10kHz) this is ≤ 2ms.

<sup>4)</sup> Default setting for OD5-350x100 and OD5-500x200 = 0.8 ms, or 1.25 kHz, all others = 0.1 ms/10 kHz.

<sup>5)</sup> Wavelength: 658 nm, max. output: 1 mW.

### Interfaces

<b>Serial</b>	✓, RS-422
Remark	RS-232 optional via external evaluation unit AOD5
<b>Digital output</b>	5 <sup>1)</sup>
Number	

<sup>1)</sup> Optional over evaluation unit AOD5.

<sup>2)</sup> A maximum of three current and three voltage outputs are possible via the AOD5 evaluation unit.

<sup>3)</sup> Output resistance 100 Ω, min. load 10 k Ω.

	Type	PNP / NPN
	Maximum output current $I_A$	$\leq 100$ mA
<b>Analog output</b>	Number	3 <sup>1) 2)</sup>
	Type	Current output / voltage output
	Current	4 mA ... 20 mA, $\leq 300 \Omega$
	Voltage	0 V ... 10 V <sup>3)</sup>
<b>Laser-off input</b>		1 x laser-off

<sup>1)</sup> Optional over evaluation unit AOD5.

<sup>2)</sup> A maximum of three current and three voltage outputs are possible via the AOD5 evaluation unit.

<sup>3)</sup> Output resistance 100  $\Omega$ , min. load 10 k  $\Omega$ .

## Electronics

<b>Supply voltage <math>U_B</math></b>	DC 12 V ... 24 V <sup>1)</sup>
<b>Warm-up time</b>	$\leq 5$ min
<b>Indication</b>	LEDs, 4" color display on optional evaluation unit
<b>Enclosure rating</b>	IP67
<b>Protection class</b>	III

<sup>1)</sup> DC 12 V (-5 %) ... DC 24 V (+10 %).

## Mechanics

<b>Dimensions (W x H x D)</b>	29 mm x 78 mm x 75 mm
<b>Housing material</b>	Metal (Aluminum)
<b>Window material</b>	Glass
<b>Weight</b>	250 g <sup>1)</sup>
<b>Connection type</b>	0.5 m cable with connector <sup>2)</sup>

<sup>1)</sup> Includes 0.5 m cable.

<sup>2)</sup> Can be extended to up to 50 m with extension cable.

## Ambient data

<b>Ambient temperature, operation</b>	-10 °C ... +50 °C
<b>Ambient temperature, storage</b>	-20 °C ... +60 °C
<b>Relative air humidity (non-condensing)</b>	35 % ... 85 %
<b>Temperature drift</b>	$\pm 0.01$ % FS/K (FS = Full Scale = Measuring range of sensor)
<b>Typ. Ambient light immunity</b>	Artificial light: $\leq 3,000$ lx Sunlight: $\leq 10,000$ lx
<b>Vibration resistance</b>	10 Hz ... 55 Hz (amplitude 1.5 mm, x-, y-, z-axis 2 hours each)
<b>Shock resistance</b>	50 G (x, y, z axis 3 times each)


## Classifications

<b>ECLASS 5.0</b>	27270801
<b>ECLASS 5.1.4</b>	27270801
<b>ECLASS 6.0</b>	27270801
<b>ECLASS 6.2</b>	27270801
<b>ECLASS 7.0</b>	27270801

<b>ECLASS 8.0</b>	27270801
<b>ECLASS 8.1</b>	27270801
<b>ECLASS 9.0</b>	27270801
<b>ECLASS 10.0</b>	27270801
<b>ECLASS 11.0</b>	27270801
<b>ECLASS 12.0</b>	27270916
<b>ETIM 5.0</b>	EC001825
<b>ETIM 6.0</b>	EC001825
<b>ETIM 7.0</b>	EC001825
<b>ETIM 8.0</b>	EC001825
<b>UNSPSC 16.0901</b>	41111613

## Dimensional drawing (Dimensions in mm (inch))

OD5-150xx

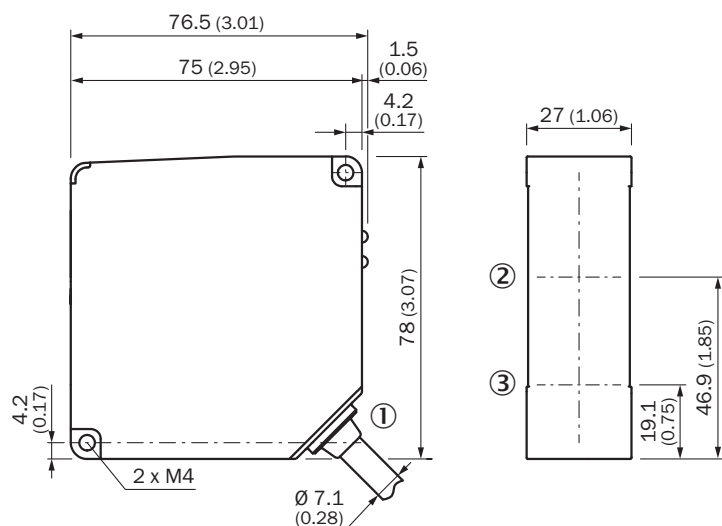


- ① Cable Ø 7.1 mm, 0.5 m with connector, 12-pin
- ② Optical axis, receiver
- ③ Optical axis, sender

## Connection type


Hirose 12-pin male connector for sensor head



### Connection diagram

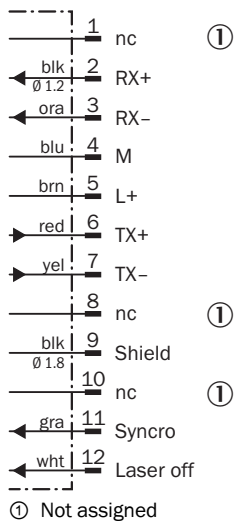


### Adjustment possible

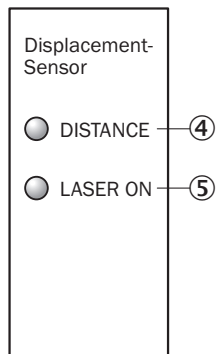

- ④ Distance indicator
- ⑤ Status indicator laser (laser on)


### Light spot size

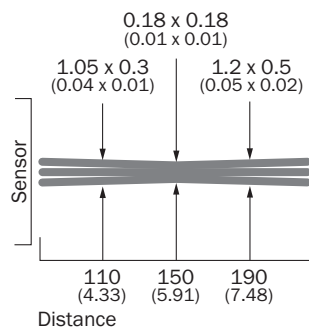

All dimensions in mm (inch)

### Linearity

OD5-150T40

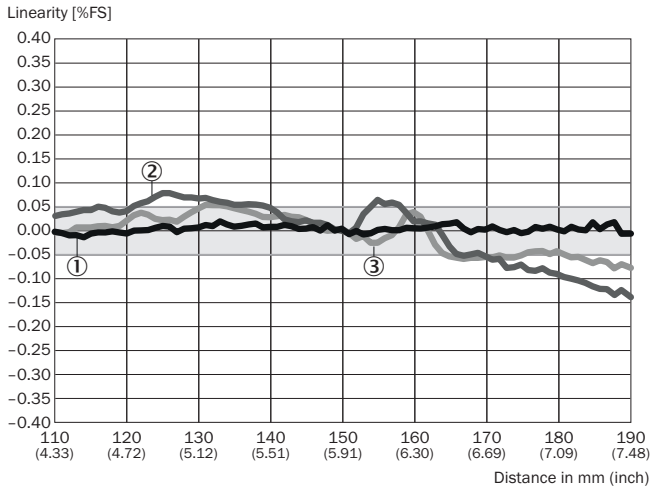


- ① White ceramic
- ② Stainless steel
- ③ Black rubber

### Recommended accessories

Other models and accessories → [www.sick.com/OD\\_Precision](http://www.sick.com/OD_Precision)

	Brief description	Type	Part no.
<b>Evaluation units</b>			
	Evaluation unit: OD Precision, 5 x NPN	AOD5-N1	6035984
	Evaluation unit: OD Precision, 5 x PNP	AOD5-P1	6035985
	<ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, M12, 12-pin, straight</li> <li>• <b>Connection type head B:</b> Male connector, M12, 12-pin, straight</li> <li>• <b>Signal type:</b> RS-422</li> <li>• <b>Cable:</b> 2 m, 12-wire, twisted pair, PVC</li> <li>• <b>Description:</b> RS-422, shielded</li> <li>• <b>Note:</b> OD Precision specific</li> </ul>	YFHRSB-020XXXMHR SB	6035986
	<ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, M12, 12-pin, straight</li> <li>• <b>Connection type head B:</b> Flying leads</li> <li>• <b>Cable:</b> 5 m, 12-wire, PVC</li> <li>• <b>Description:</b> Shielded</li> <li>• <b>Note:</b> For stand-alone operation</li> </ul>	DOL-1212-G05M	6035988
	<ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, M12, 12-pin, straight</li> <li>• <b>Connection type head B:</b> Male connector, M12, 12-pin, straight</li> <li>• <b>Signal type:</b> RS-422</li> <li>• <b>Cable:</b> 5 m, 12-wire, twisted pair, PVC</li> <li>• <b>Description:</b> RS-422, shielded</li> <li>• <b>Note:</b> OD Precision specific</li> </ul>	YFHRSB-050XXXMHR SB	6035987
	<ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Male connector, 50-pin, straight</li> <li>• <b>Connection type head B:</b> Flying leads</li> <li>• <b>Cable:</b> 3 m, 50-wire, PVC</li> <li>• <b>Description:</b> Shielded</li> <li>• <b>Connection systems:</b> Flying leads</li> <li>• <b>Note:</b> In- and output expansion cable for AOD5-P/N1 (OD Precision)</li> </ul>	IO-EXP-AOD5	6035990

	Brief description	Type	Part no.
	<ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Male connector, 12-pin</li> <li>• <b>Connection type head B:</b> Terminal connector, 12-pin</li> <li>• <b>Description:</b> Unshielded</li> <li>• <b>Connection systems:</b> Spring terminal</li> <li>• <b>Note:</b> Terminal strip for AOD5-P/N1 (OD Precision)</li> </ul>	TERM.-AOD5	6035989

### Recommended services

Additional services → [www.sick.com/OD\\_Precision](http://www.sick.com/OD_Precision)

	Type	Part no.
Commissioning		
<ul style="list-style-type: none"> <li>• <b>Product area:</b> Displacement measurement sensors</li> <li>• <b>Range of services:</b> Inspection of connection and mounting, optimization of parameters of SICK product as well as tests, set-up of previously defined functions of the scaling of the analog measuring range, switching point position, hysteresis, measuring frequency, measured value filter, signal quality, evaluation function, or communication interface</li> <li>• <b>Travel expenses:</b> The prices do not include travel costs such as hotel, flight, travel time and expenses.</li> <li>• <b>Duration:</b> Additional work will be invoiced separately</li> </ul>	DT20 Hi/OD/OL commissioning	1612241

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)