



# PR02-P100B25A1

Profiler

DISPLACEMENT MEASUREMENT SENSORS

**SICK**  
Sensor Intelligence.



## Ordering information

Type	Part no.
PRO2-P100B25A1	6052873

Other models and accessories → [www.sick.com/Profiler](http://www.sick.com/Profiler)



## Detailed technical data

### Features

<b>Measuring range</b>	75 mm ... 125 mm
<b>Measuring width (at measuring distance)</b>	17 mm (75 mm) 22 mm (100 mm) 27 mm (125 mm)
<b>Target</b>	Natural objects
<b>Repeatability</b>	25 µm, x-direction <sup>1) 2)</sup> 2 µm, z-direction
<b>Linearity</b>	X-direction ± 170 µm ... ± 270 µm <sup>3) 4)</sup> Z-direction ± 50 µm
<b>Response time</b>	≥ 5 ms <sup>5)</sup>
<b>Light source</b>	Laser, red visible red light
<b>Type of light</b>	Visible red light
<b>Laser class</b>	2, complies with 21 CFR 1040.10 and 1040.11 except for the conformance according to "Laser Notice No. 50" from June 24, 2007 (IEC 60825-1:2014, EN 60825-1:2014) <sup>6)</sup>
<b>Typ. light spot size (distance)</b>	0.3 mm x 32 mm
<b>Additional function</b>	Timer (ON-OFF delay, one shot, off) Averaging 1 ... 1,023 Sensitivity (adjustable) Measurement functions (average, peak height, bottom height, width, peak height position, bottom height position, edge position, edge count, tilt, area, length, diameter)

<sup>1)</sup> Typical value; actual value depends on settings and environmental conditions. For details see field of view.

<sup>2)</sup> Measurement on 90 % remission (ceramic, white), for OD25-x measurement on mirror; averaging set to: 256; constant ambient conditions.

<sup>3)</sup> Measurement on 90 % remission (ceramic, white).

<sup>4)</sup> Constant ambient conditions.

<sup>5)</sup> Typical value, high-res mode.

<sup>6)</sup> Wavelength: 655 nm, max. output: 1 mW.

## Interfaces

<b>Serial</b>	✓, RS-485
Data transmission rate	9.6 kbit/s ... 4 Mbit/s, half-duplex
<b>Digital output</b>	
Number	3
Type	PNP
Maximum output current $I_A$	$\leq 100$ mA
<b>Analog output</b>	
Number	1
Type	Current output
Current	4 mA ... 20 mA, $\leq 300 \Omega$ <sup>1)</sup>
<b>External input</b>	Selectable from bank, trigger, hold, reset, laser off and offset

<sup>1)</sup> 24 mA for measuring out of range.

## Electronics

<b>Supply voltage <math>U_B</math></b>	DC 12 V (-5 %) ... DC 24 V (+10 %) <sup>1)</sup>
<b>Power consumption</b>	$\leq 180$ mA
<b>Warm-up time</b>	$\leq 30$ min
<b>Indication</b>	2 LEDs (operational status, Laser on/off) Dot matrix display
<b>Enclosure rating</b>	IP67
<b>Protection class</b>	III

<sup>1)</sup> When using analog voltage output reduced to 18 V DC (-5%) ... 24 V DC (+10%).

## Mechanics

<b>Dimensions (W x H x D)</b>	40 mm x 94.5 mm x 60 mm
<b>Housing material</b>	Metal (zinc diecast)
<b>Window material</b>	Plastic (Polycarbonat (PC))
<b>Weight</b>	300 g
<b>Connection type</b>	Female connector, HRS, 12-pin (I/O, power supply)

## Ambient data


<b>Ambient temperature, operation</b>	-10 °C ... +40 °C, Operating temperature at $V_S = 24$ V
<b>Ambient temperature, storage</b>	-20 °C ... +60 °C
<b>Max. rel. humidity (not condensing)</b>	85 %
<b>Temperature drift</b>	$\pm 0.05$ % FS/K (FS = Full Scale = Measuring range of sensor)
<b>Typ. Ambient light immunity</b>	Artificial light: $\leq 3,000$ lx Sunlight: $\leq 10,000$ lx
<b>Vibration resistance</b>	10 Hz ... 55 Hz (amplitude 1.5 mm, x-, y-, z-axis 2 hours each)
<b>Shock resistance</b>	50 G (x, y, z axis 3 times each)

## Classifications

<b>ECLASS 5.0</b>	27270801
<b>ECLASS 5.1.4</b>	27270801
<b>ECLASS 6.0</b>	27270801

<b>ECLASS 6.2</b>	27270801
<b>ECLASS 7.0</b>	27270801
<b>ECLASS 8.0</b>	27270801
<b>ECLASS 8.1</b>	27270801
<b>ECLASS 9.0</b>	27270801
<b>ECLASS 10.0</b>	27270801
<b>ECLASS 11.0</b>	27270801
<b>ECLASS 12.0</b>	27270916
<b>ETIM 5.0</b>	EC001825
<b>ETIM 6.0</b>	EC001825
<b>ETIM 7.0</b>	EC001825
<b>ETIM 8.0</b>	EC001825
<b>UNSPSC 16.0901</b>	41111613


### Dimensional drawing (Dimensions in mm (inch))

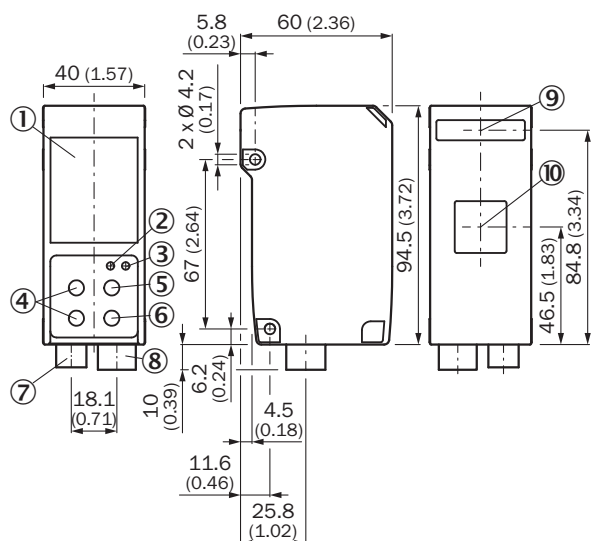


- ① LCD
- ② LED indicator for laser on (green)
- ③ LED display for supply voltage active (green)
- ④ Cursor keys
- ⑤ Exit button
- ⑥ Set button
- ⑦ Male connector, HRS, 6-pin (communication interface)
- ⑧ Female connector, HRS, 12-pin (I/O, power supply)
- ⑨ Sender
- ⑩ Receiver

### Field of view


Field of view: sending area

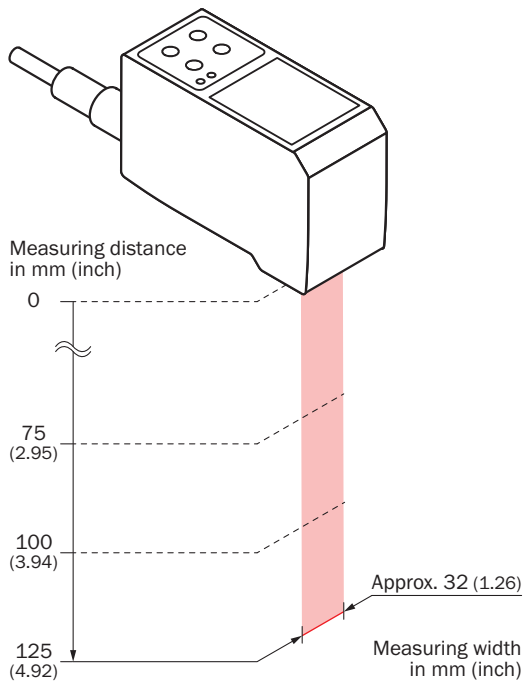


Field of view: receiving area

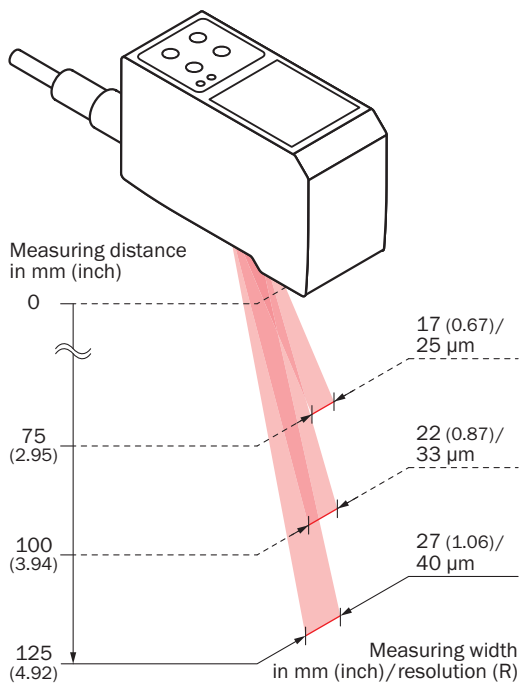

## Connection type



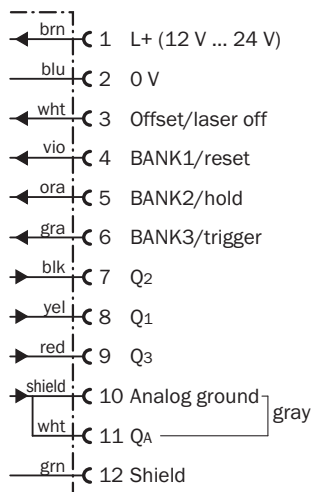

## Connection diagram



## Recommended accessories

Other models and accessories → [www.sick.com/Profiler](http://www.sick.com/Profiler)

	Brief description	Type	Part no.
Others			
	<ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Male connector, HRS, 12-pin</li> <li>• <b>Signal type:</b> Digital I/Os, Power</li> <li>• <b>Cable:</b> 2 m, 12-wire, PVC</li> <li>• <b>Description:</b> Digital I/Os, Power, unshielded</li> </ul>	YFHRSB-020VD3XLEAX	6053017
	<ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, HRS, 6-pin</li> <li>• <b>Connection type head B:</b> Male connector, USB</li> <li>• <b>Signal type:</b> RS-485</li> <li>• <b>Cable:</b> 1.8 m, 6-wire, PVC</li> <li>• <b>Description:</b> RS-485</li> </ul>	YFHRS6-018VD3MUSA4	6053020

## Recommended services

Additional services → [www.sick.com/Profiler](http://www.sick.com/Profiler)

	Type	Part no.
Commissioning		
<ul style="list-style-type: none"> <li>• <b>Product area:</b> Displacement measurement sensors</li> <li>• <b>Range of services:</b> Inspection of connection, fine adjustment, optimization of parameters of SICK product as well as tests, set-up of previously defined functions of profile and camera imaging, correction settings, range evaluation and function adjustment, input/output functions and settings, calculation functions, memory management, or communication interface</li> <li>• <b>Travel expenses:</b> The prices do not include travel costs such as hotel, flight, travel time and expenses.</li> <li>• <b>Duration:</b> Additional work will be invoiced separately</li> </ul>	Profiler commissioning	1612804

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)