



# VSPP-5F2134

Inspector

2D MACHINE VISION

**SICK**  
Sensor Intelligence.



### Ordering information

Type	Part no.
VSPP-5F2134	1056394

Other models and accessories → [www.sick.com/Inspector](http://www.sick.com/Inspector)



### Detailed technical data

#### Features

<b>Technology</b>	2D snapshot
<b>Product category</b>	Configurable
<b>Toolkit</b>	Object locator Pixel counter Edge pixel counter Pattern Blob Finder Polygon
<b>Sensor</b>	CMOS matrix sensor, grayscale values
<b>Optical focus</b>	Adjustable focus (manually)
<b>Calibration</b>	Perspective and lens distortion correction, mm results
<b>Working distance</b>	≥ 50 mm
<b>Operating distance with internal illumination</b>	50 mm ... 200 mm
<b>Field of view of internal illumination</b>	22 mm x 15 mm ... 79 mm x 58 mm
<b>Illumination</b>	Integrated
<b>Illumination color</b>	White,
<b>LED class</b>	Risk group 1 (low risk, IEC62471 : 2006)
<b>Spectral range</b>	Approx. 400 nm ... 750 nm
<b>Offline support</b>	Emulator
<b>Lens</b>	S-mount
	Optical format 1/3"
	Focal length 10 mm
<b>Task</b>	Detecting - Standard objects Measuring - Dimension, contour and volume Measuring - Number Identifying - OCR Identifying - Pattern Determining position - 2D position determination

## Mechanics/electronics

<b>Connection type</b>	M12, 12-pin male connector M12, 4-pin female connector
<b>Supply voltage</b>	24 V DC, $\pm 20\%$
<b>Ripple</b>	$< 5 V_{pp}$
<b>Current consumption</b>	$< 450\text{ mA}$ , without output load
<b>Enclosure rating</b>	IP67 <sup>1)</sup>
<b>Housing material</b>	Aluminum
<b>Window material</b>	PMMA
<b>Weight</b>	445 g
<b>Dimensions (L x W x H)</b>	100 mm x 53 mm x 38 mm

<sup>1)</sup> With front window mounted.

## Performance

<b>Sensor resolution</b>	640 px x 480 px
<b>Scan/frame rate</b>	40 fps <sup>1)</sup>
<b>Number of inspections</b>	32
<b>Reference images</b>	32 objects

<sup>1)</sup> Max. 200 fps.

## Interfaces

<b>Ethernet</b>	✓, TCP/IP
Data transmission rate	100 Mbit/s
<b>EtherCAT</b>	✓, DC (Distributed Clocks), EoE (Ethernet over EtherCAT®), FoE (Files Access over EtherCAT®), CoE (CAN over EtherCAT®)
Data transmission rate	100 Mbit/s
<b>Operator interfaces</b>	Inspector Viewer, web server
<b>Configuration software</b>	SOPAS ET
<b>Data storage and retrieval</b>	Log for 30 images, record images on PC, store images to FTP
<b>Ethernet communication</b>	Dual port, Web API
<b>Digital input</b>	4 inputs (24 V)
<b>Configurable inputs</b>	External trigger, encoder input, External teach, reference object selection
<b>Digital output</b>	3 digital outputs, 24 V (B-type)
<b>Configurable outputs</b>	Output by logical expressions, Additional image storage possibility via FTP
<b>Output current</b>	$\leq 100\text{ mA}$
<b>Standard outputs</b>	No object detected, Everything OK, Detail error
<b>Maximum encoder frequency</b>	40 kHz
<b>External illumination</b>	5 V TTL

## Ambient data

<b>Shock load</b>	EN 60068-2-27
<b>Vibration load</b>	IEC 60068-2-6
<b>Ambient operating temperature</b>	0 °C ... +45 °C <sup>1)</sup>

<sup>1)</sup> Relative humidity: 35% ... 85%, 95% in storage.

<b>Storage temperature</b>	-20 °C ... +70 °C <sup>1)</sup>
----------------------------	---------------------------------


<sup>1)</sup> Relative humidity: 35% ... 85%, 95% in storage.

### Classifications

<b>ECLASS 5.0</b>	27310205
<b>ECLASS 5.1.4</b>	27310205
<b>ECLASS 6.0</b>	27310205
<b>ECLASS 6.2</b>	27310205
<b>ECLASS 7.0</b>	27310205
<b>ECLASS 8.0</b>	27310205
<b>ECLASS 8.1</b>	27310205
<b>ECLASS 9.0</b>	27310205
<b>ECLASS 10.0</b>	27310205
<b>ECLASS 11.0</b>	27310205
<b>ECLASS 12.0</b>	27310205
<b>ETIM 5.0</b>	EC001820
<b>ETIM 6.0</b>	EC001820
<b>ETIM 7.0</b>	EC001820
<b>ETIM 8.0</b>	EC001820
<b>UNSPSC 16.0901</b>	43211731


### Dimensional drawing (Dimensions in mm (inch))

EtherCAT<sup>®</sup>

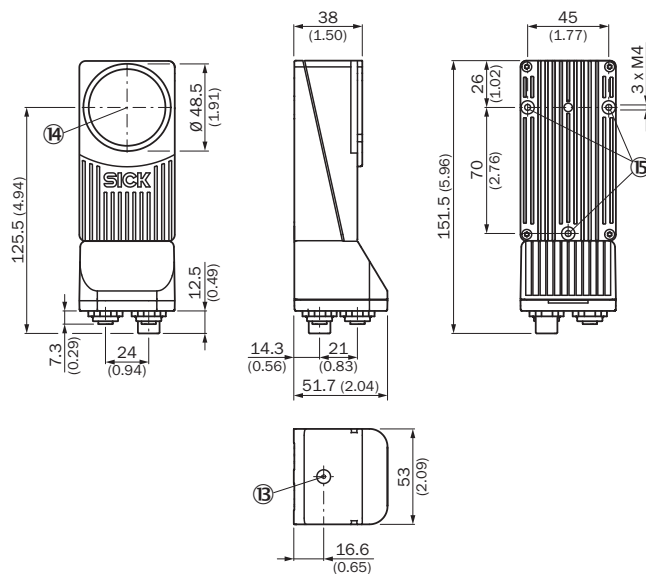


- Ⓐ Focus
- Ⓑ Front screen
- Ⓒ Mounting hole M4

## Field of view

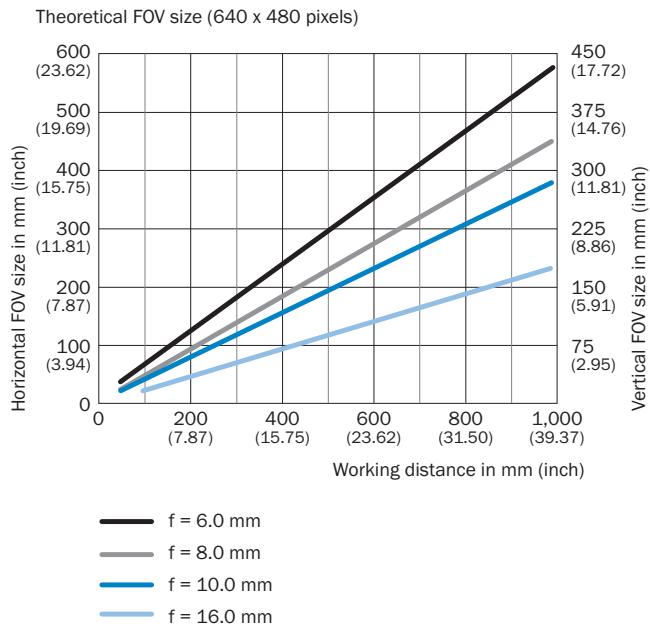


## Connection type

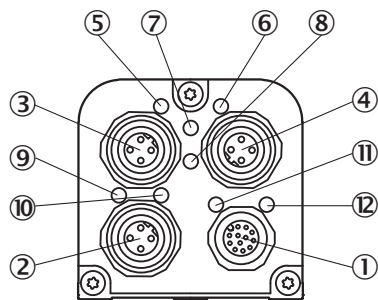


- ① Power I/O: M12, 12-pin
- ② Ethernet, M12 female connector, 4-pin
- ③ EtherNet X1: socket M12, 4-pin
- ④ EtherNet X2: socket M12, 4-pin
- ⑤ EtherCAT® link/activity
- ⑥ EtherCAT® link/activity
- ⑦ EtherCAT® status indicator
- ⑧ EtherCAT® fault indicator
- ⑨ EtherNet data
- ⑩ Ethernet link
- ⑪ Function LED
- ⑫ Power on

### Connection diagram

M12 connection diagram, 12-pin

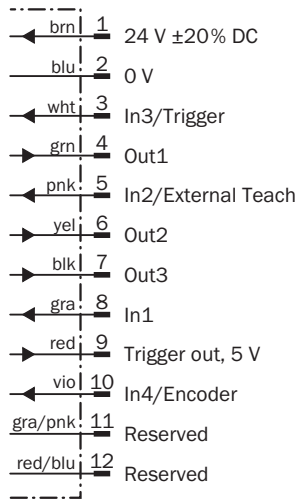








Ethernet connection diagram



### Recommended accessories

Other models and accessories → [www.sick.com/Inspector](http://www.sick.com/Inspector)

	Brief description	Type	Part no.
<b>Lenses and accessories</b>			
	Replaces the front screen and generates even and uniform illumination, for glossy surfaces, PMMA	Inspector Flex Dome	2050678
	Exchangeable lens, focal length 6 mm, Round connector M12 x 0.5	OBJ-B06025BA	2049668
	Exchangeable lens, focal length 16 mm, including spacer ring, Round connector M12 x 0.5	OBJ-B16018BA	2049418
<b>Optical filters</b>			
	Color filter blue (468 nm ± 62 nm) for variants with exchangeable lens and front window, PMMA	Inspector Flex blue color filter	2050676
	Color filter green (544 nm ± 53 nm) for variants with exchangeable lens and front window, PMMA	Inspector Flex green color filter	2050677

	Brief description	Type	Part no.
	Color filter red for variants with exchangeable lens and front window, PMMA	Inspector Flex red color filter	2050675
Others			
	<ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, M12, 12-pin, straight</li> <li>• <b>Connection type head B:</b> Flying leads</li> <li>• <b>Signal type:</b> Sensor/actuator cable</li> <li>• <b>Cable:</b> 5 m, 12-wire, cable ends blue/red, gray/pink and red isolated separately, PUR, halogen-free</li> <li>• <b>Description:</b> Sensor/actuator cable, shielded</li> <li>• <b>Connection systems:</b> Flying leads</li> </ul>	DOL-1212-G05MAS01	6036556

### Recommended services

Additional services → [www.sick.com/Inspector](http://www.sick.com/Inspector)

	Type	Part no.
Commissioning		
<ul style="list-style-type: none"> <li>• <b>Product area:</b> 2D machine vision</li> <li>• <b>Range of services:</b> Inspection of connection, fine adjustment, optimization of parameters of SICK product as well as tests, set-up of previously defined functions of image settings, object locator, detailed inspections, output settings and results</li> <li>• <b>Duration:</b> Additional work will be invoiced separately</li> </ul>	Inspector commissioning	1612238
Maintenance		
<ul style="list-style-type: none"> <li>• <b>Product area:</b> 2D machine vision</li> <li>• <b>Range of services:</b> Inspection, analysis and restoring of defined functions, set-up of previously defined functions of image settings, object locator, detailed inspections, output settings and results</li> <li>• <b>Duration:</b> Additional work will be invoiced separately</li> </ul>	Inspector maintenance	1612242
Extended warranty		
<ul style="list-style-type: none"> <li>• <b>Product area:</b> Machine vision, LiDAR sensors, safety camera sensors, Safety laser scanners, Safety radar sensors, Radar sensors, Fixed mount barcode scanners, Image-based code readers, RFID, Mobile handheld scanners</li> <li>• <b>Range of services:</b> The services correspond to the scope of the statutory manufacturer warranty (SICK general terms of delivery).</li> <li>• <b>Duration:</b> Five-year warranty from delivery date.</li> </ul>	Extended warranty for a total of five years from delivery date	1680671

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)