

# Y8A3AA2-C2AB000XXX

Passive distribution boxes



### Y8A3AA2-C2AB000XXX | Passive distribution boxes



Ordering information

| Туре               | Part no. |
|--------------------|----------|
| Y8A3AA2-C2AB000XXX | 2115736  |

Other models and accessories -> www.sick.com/Passive\_distribution\_boxes



#### Detailed technical data

#### Technical specifications

| Shielding                 | Unshielded                           |
|---------------------------|--------------------------------------|
| Number of slots           | 10                                   |
| Slot connection type      | M8, 3-pin, A-coded, female connector |
| Root port connection type | M12, 12-pin, A-coded, male connector |
| Width across flats        |                                      |
| Root port                 | 13                                   |
| Tightening torque         |                                      |
| Slots                     | 0.4 Nm                               |
| Root port                 | 0.6 Nm                               |
| Display LED               |                                      |
| Slots                     | 1 x per socket                       |
| Root port                 | 1x per distributor                   |
| Reference voltage         | ≤ 24 V DC                            |
| Current loading           | 1.5 A                                |
| Overvoltage category      | III                                  |
| Operating temperature     |                                      |
| Distributor box           | -20 °C +55 °C                        |
| Enclosure rating          | IP65/ IP67                           |
| UL File No.               | E238799                              |
| Authorizations            | UL<br>CE                             |
| Items supplied            | 10 x labeling plates                 |


#### Classifications

| ECLASS 5.0   | 27279201 |
|--------------|----------|
| ECLASS 5.1.4 | 27279201 |
| ECLASS 6.0   | 27279201 |
| ECLASS 6.2   | 27279201 |
| ECLASS 7.0   | 27279201 |

### Y8A3AA2-C2AB000XXX | Passive distribution boxes


| ECLASS 8.0     | 27279201 |
|----------------|----------|
| ECLASS 8.1     | 27279201 |
| ECLASS 9.0     | 27440108 |
| ECLASS 10.0    | 27440108 |
| ECLASS 11.0    | 27440108 |
| ECLASS 12.0    | 27440108 |
| ETIM 5.0       | EC002585 |
| ETIM 6.0       | EC002585 |
| ETIM 7.0       | EC002585 |
| ETIM 8.0       | EC002585 |
| UNSPSC 16.0901 | 31163032 |

#### Dimensional drawing (Dimensions in mm (inch))

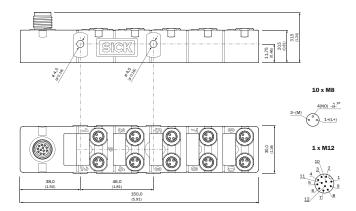

#### Connection diagram

Cd-483

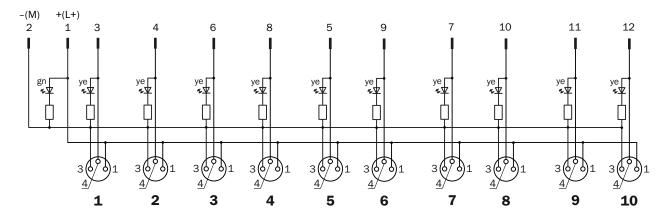

## Y8A3AA2-C2AB000XXX | Passive distribution boxes

#### **Recommended accessories**

Other models and accessories 

www.sick.com/Passive\_distribution\_boxes

|              | Brief description   | Туре                   | Part no. |  |  |  |
|--------------|---|------------------------|----------|--|--|--|
| Device prote | Device protection (mechanical)  |                        |          |  |  |  |
|              | 1 piece, Protective cap for M8 socket or unused ports   | DOS-08SK               | 5340762  |  |  |  |
| Others       |   |                        |          |  |  |  |
| ¥.           | <ul> <li>Connection type head A: Female connector, M12, 12-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 12-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>                              | YF2A1B-<br>050UD1XLEAX | 2119019  |  |  |  |
| ¥.           | <ul> <li>Connection type head A: Female connector, M12, 12-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 10 m, 12-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>                             | YF2A1B-<br>100UD1XLEAX | 2119045  |  |  |  |
|              | <ul> <li>Connection type head A: Female connector, M12, 12-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 12-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>                                | YG2A1B-<br>050UD1XLEAX | 2119046  |  |  |  |
|              | <ul> <li>Connection type head A: Female connector, M12, 12-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 10 m, 12-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>                               | YG2A1B-<br>100UD1XLEAX | 2119050  |  |  |  |
| <b>b b</b>   | <ul> <li>Connection type head A: Female connector, M8, 3-pin, straight, A-coded</li> <li>Connection type head B: Male connector, M8, 3-pin, straight, A-coded</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 3-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul> | YF8U13-<br>050UA1M8U13 | 2096308  |  |  |  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

## WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com



Online data sheet

