



ZS3678-SR2F263VZWW

Zx36

MOBILE HANDHELD SCANNERS

**SICK**  
Sensor Intelligence.



### Ordering information

Type	Part no.
ZS3678-SR2F263VZWW	6080543

Other models and accessories → [www.sick.com/Zx36](http://www.sick.com/Zx36)



### Detailed technical data

#### Features

<b>Version</b>	Standard Range (SR)
<b>Application</b>	Industrial application
<b>Country approval</b>	World-wide (except India, Korea)
<b>Scanner design</b>	Wireless variant
<b>Light source</b>	LED, Visible, Red, 660 nm Target, laser, Visible, Red, 610 nm
<b>Reading distance</b>	30 mm ... 1,520 mm
<b>Code resolution</b>	≥ 0.13 mm <sup>1)</sup> ≥ 0.19 mm <sup>2)</sup>

<sup>1)</sup> Valid for Code 128.

<sup>2)</sup> Valid for Data Matrix code.

#### Mechanics/electronics

<b>Supply voltage</b>	5 V DC, ± 10 %, Via host 12 V DC, ± 5 %, External supply
<b>Housing color</b>	Blue, black
<b>Enclosure rating</b>	IP65 IP68
<b>Weight</b>	407 g, incl. rechargeable battery
<b>Dimensions (L x W x H)</b>	132 mm x 77 mm x 185 mm

#### Performance

<b>Readable code structures</b>	1D codes, 2D codes, Stacked, Digimarc®
<b>Bar code types</b>	Code 39, Code 39 Trioptic, Code 32, Code 93, Code 11, Codabar, Code 128, GS1-128 / EAN 128, UPC / EAN / JAN (with addition), MSI/Plessey, Interleaved 2 of 5, Standard and Industrial 2 of 5, Matrix 2 of 5, GS1 DataBar, Australian Post, US Planet, US Postnet, British Post, Japan Post, Dutch KIX Post, OCR symbologies
<b>2D code types</b>	Data Matrix, QR code, MicroQR-Code, Aztec, MaxiCode, TLC-39, Chinese Sensible (Han Xin)
<b>Stacked code types</b>	PDF417, MicroPDF417, Code 49, Code 16K, Composite, Codablock F
<b>Code alignment</b>	Omni-directional

<b>Battery power</b>	3,100 mAh, over 100,000 scans with full battery
<b>Code buffer</b>	9,000 Codes (EAN, for scanning in batch mode)

## Interfaces

<b>Ethernet</b>	✓, TCP/IP
Type of fieldbus integration	Optional over external fieldbus module CDF600-2
<b>PROFINET</b>	✓
Type of fieldbus integration	Optional over external fieldbus module CDF600-2
Function	PROFINET Single Port, PROFINET Dual Port
<b>EtherCAT</b>	✓
Type of fieldbus integration	Optional over external fieldbus module CDF600-2
<b>Serial</b>	✓, RS-232 TTL
<b>PROFIBUS DP</b>	✓
Type of fieldbus integration	Optional over external fieldbus module CDF600-2
<b>USB</b>	✓
Function	Keyboard wedge, COM-Port emulation
<b>Bluetooth</b>	✓
Remark	Bluetooth™ V4.0, 2.402 ... 2.4830 GHz
Function	Wireless operating range up to 100 m (free view), batch function for expansion of the wireless radius, up to seven scanners communicate with one base station
Data transmission rate	≤ 3 Mbit/s
<b>Optical indicators</b>	3 LEDs (operational status, good read, radio connection status)
<b>Acoustic indicators</b>	Beeper, can be switched off
<b>Vibration</b>	Yes
<b>Configuration software</b>	Z-Up Tool

## Ambient data

<b>Shock resistance</b>	Multiple falls Onto concrete from a height of 3 m
<b>Ambient operating temperature</b>	-20 °C ... +50 °C
<b>Storage temperature</b>	-40 °C ... +70 °C
<b>Permissible relative humidity</b>	95 %, Non-condensing
<b>Ambient light immunity</b>	108,000 lx

## General notes

<b>Items supplied</b>	The rechargeable battery is included with delivery
<b>Note</b>	Not free of paint wetting impairment substances.

## Classifications


<b>ECLASS 5.0</b>	27280101
<b>ECLASS 5.1.4</b>	27280101
<b>ECLASS 6.0</b>	27280101
<b>ECLASS 6.2</b>	27280101
<b>ECLASS 7.0</b>	27280101
<b>ECLASS 8.0</b>	27280101
<b>ECLASS 8.1</b>	27280101

<b>ECLASS 9.0</b>	27280101
<b>ECLASS 10.0</b>	27280101
<b>ECLASS 11.0</b>	27280101
<b>ECLASS 12.0</b>	27280101
<b>ETIM 5.0</b>	EC002550
<b>ETIM 6.0</b>	EC002550
<b>ETIM 7.0</b>	EC002550
<b>ETIM 8.0</b>	EC002550
<b>UNSPSC 16.0901</b>	43211701

### Connection diagram


PROFINET IO/RT

#### PROFINET IO/RT

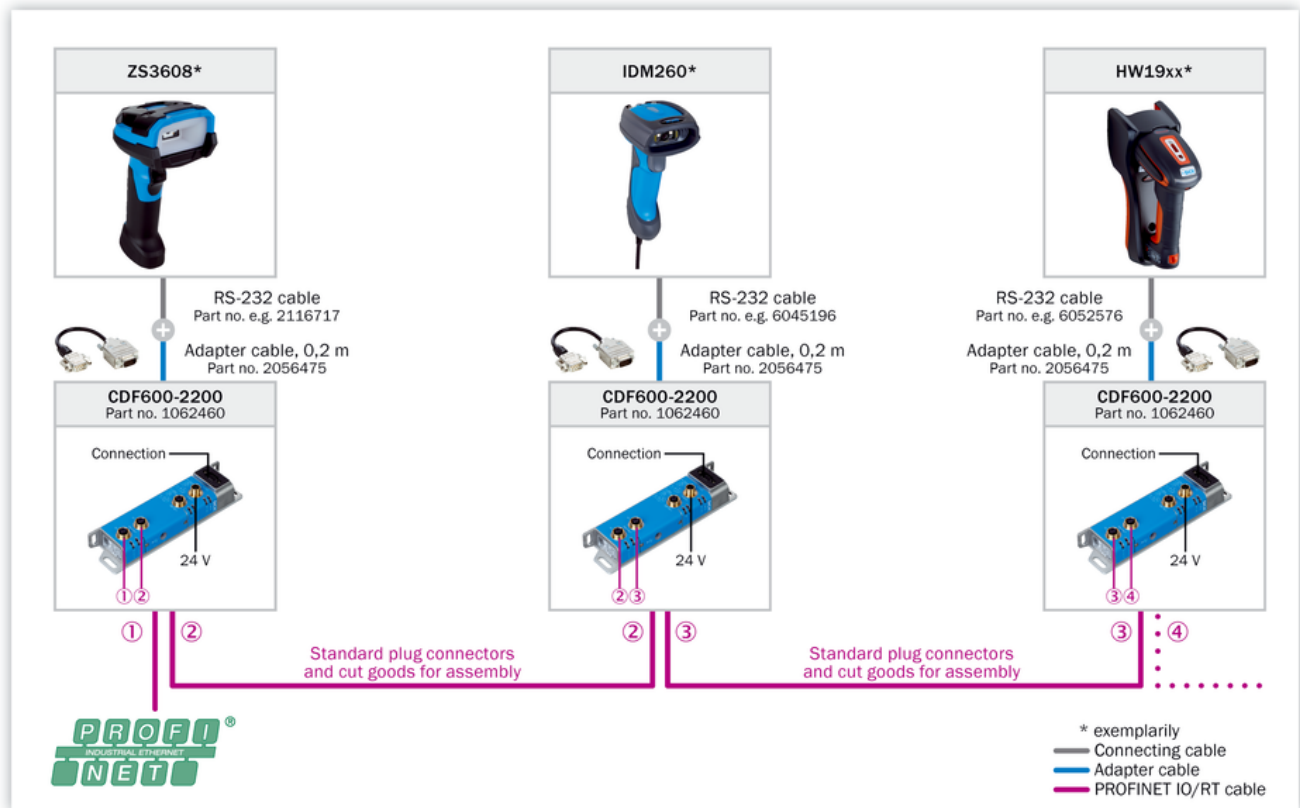


PROFIBUS DP

PROFIBUS DP

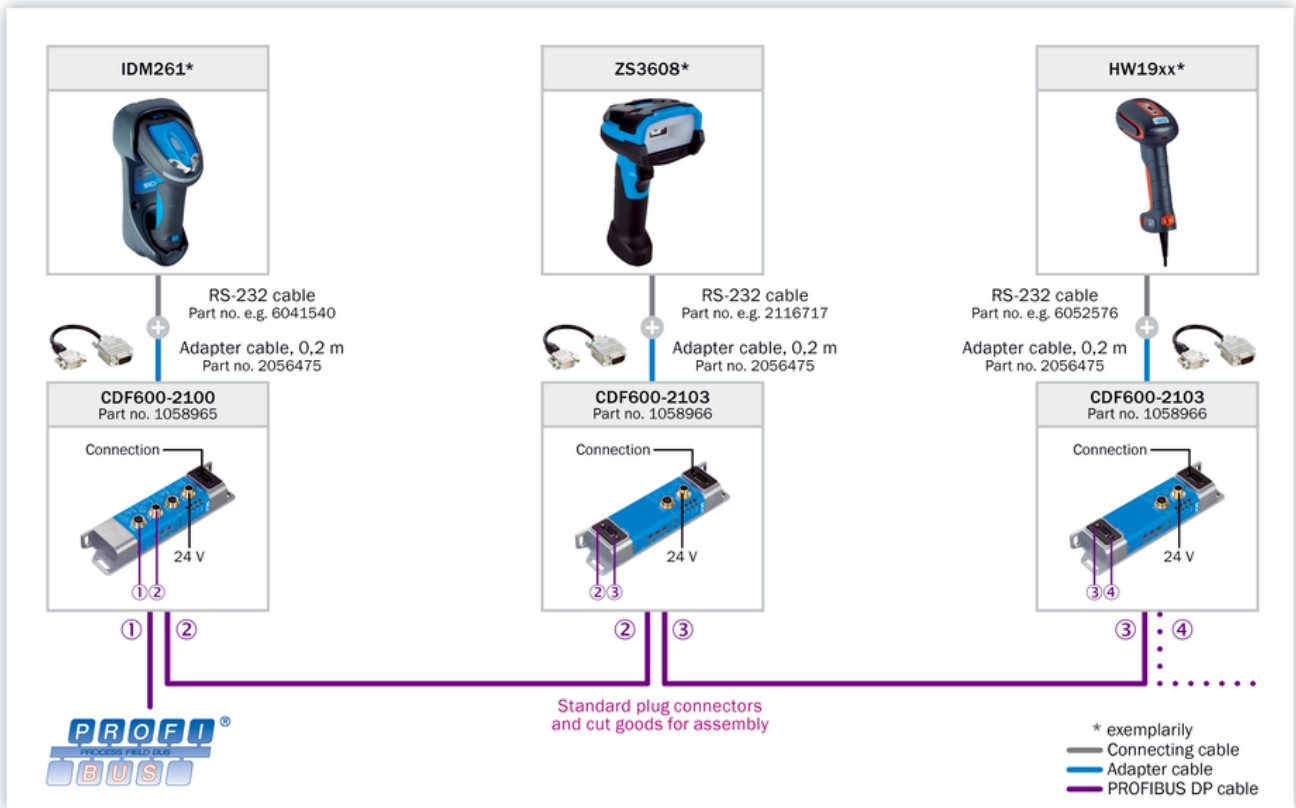


### Ethernet TCP/IP

#### Ethernet TCP/IP

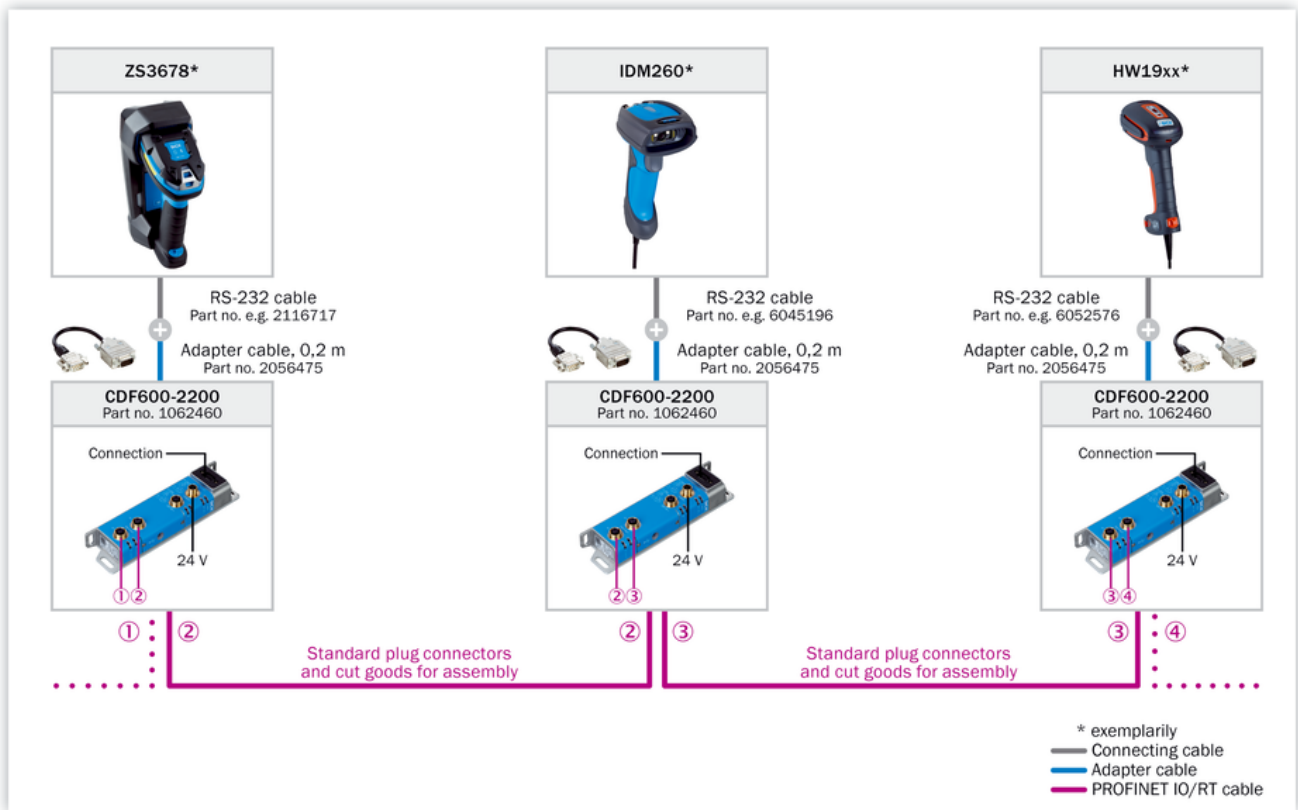


EtherCAT®

EtherCAT®

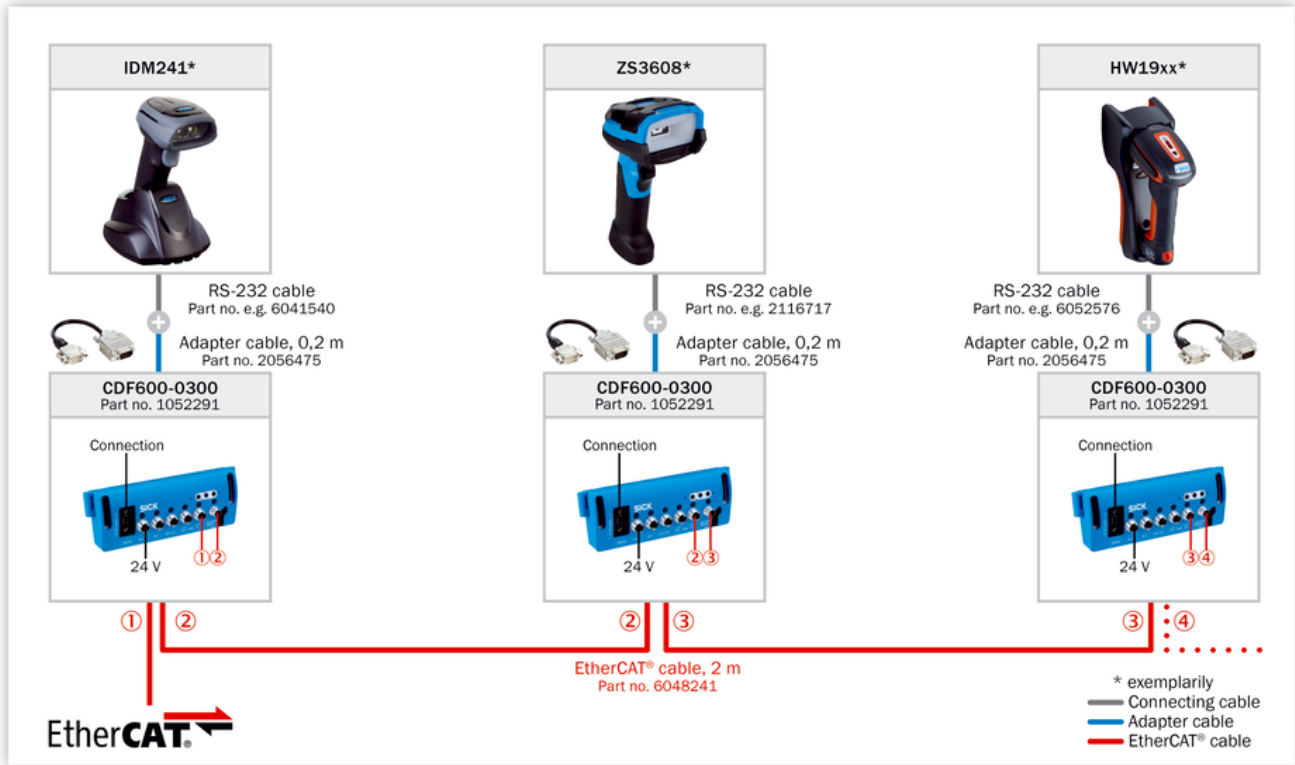


AUX looping

Looping-in via AUX

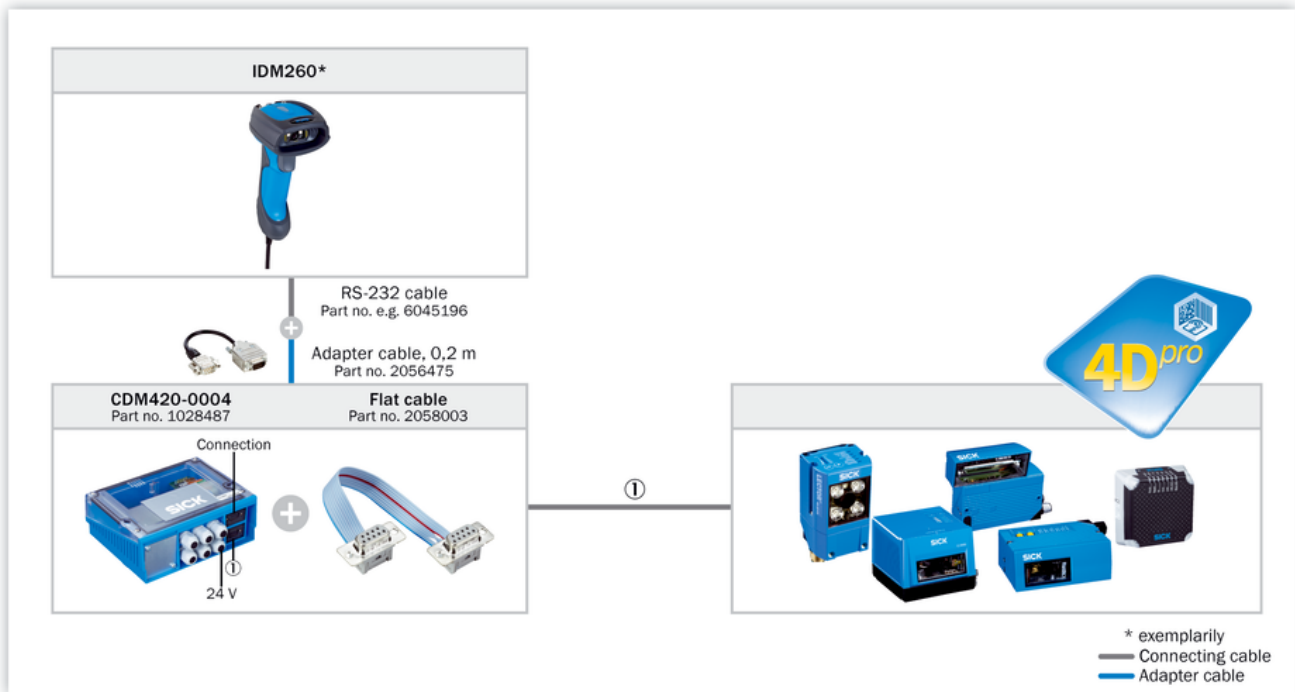

### Selection Guide


ZS36x8 DPM

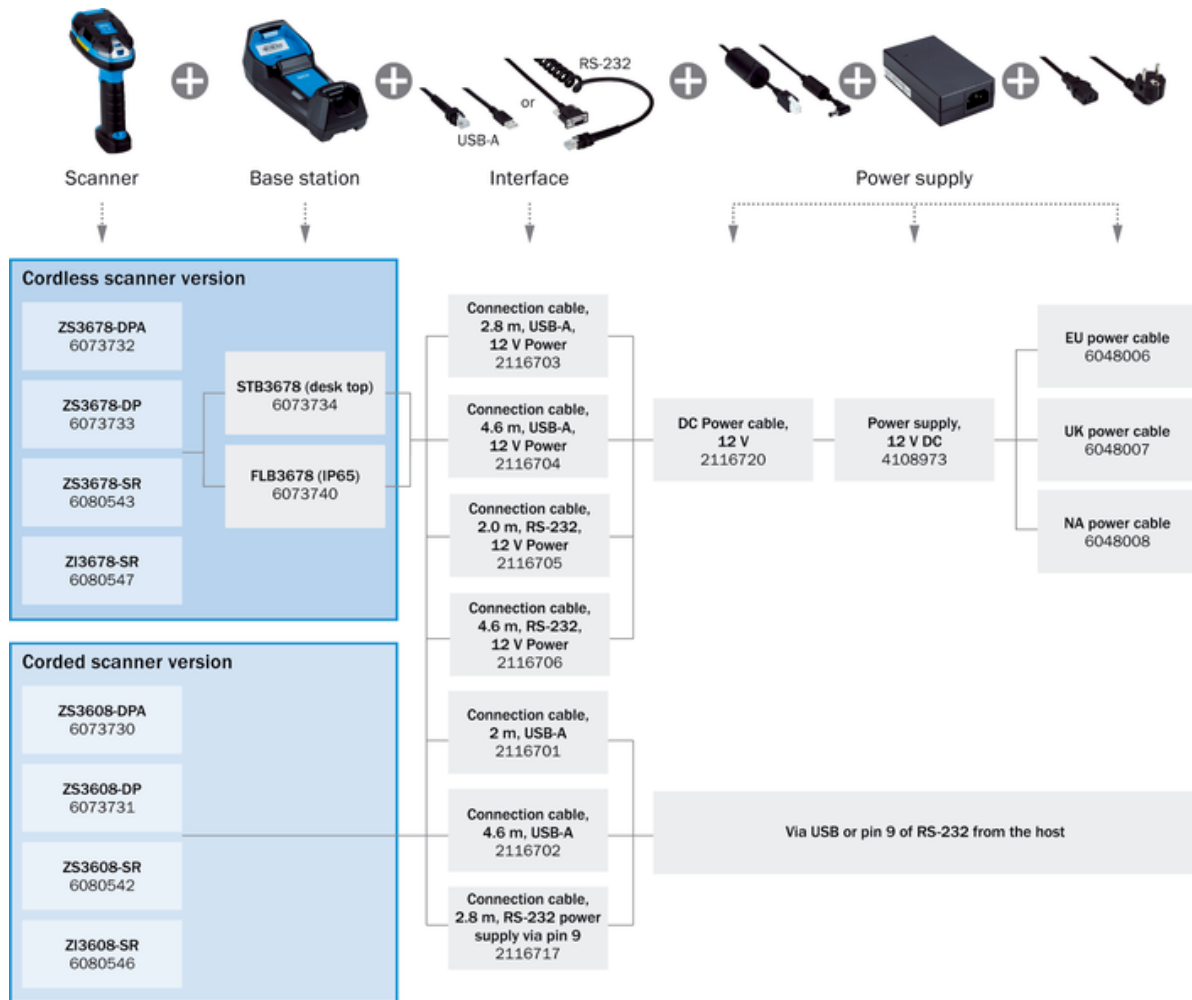

#### Optional accessories for all scanner versions



#### Optional accessories only for cordless scanner versions

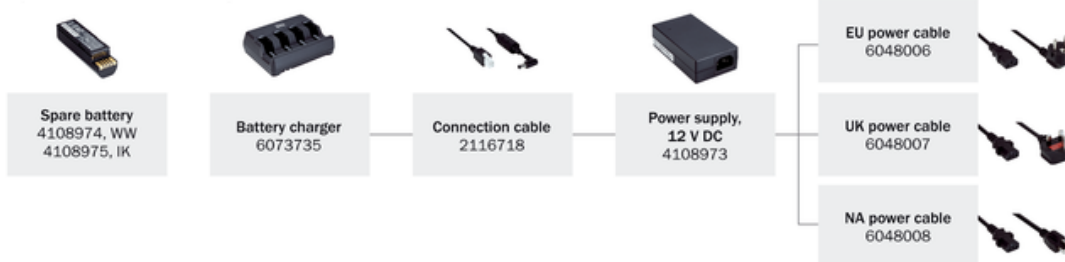










Recommended accessories

Other models and accessories → [www.sick.com/Zx36](http://www.sick.com/Zx36)

	Brief description	Type	Part no.
<b>Rechargeable batteries and battery chargers</b>			
	Charging and WPAN receiver station for ZS36xx, desk top (Zebra STB3678-C126F3WW), may require power supply unit (part number 4108973, Zebra PWR-BGA12V50W0WW), DC cable (part number 2116720, Zebra CBL-DC-451A1-01) and AC cable	STB3678 base station	6073734
<b>Others</b>			
	<ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, D-Sub, 9-pin, straight</li> <li><b>Connection type head B:</b> Male connector, RJ45</li> <li><b>Signal type:</b> RS-232 TTL</li> <li><b>Cable:</b> 2 m, straightened cable</li> <li><b>Description:</b> RS-232 TTL, 5 V Host Power, with power socket for 12 V power supply, RS232 TTL, TXT on pin 2 (Zebra CBA-R07-S07PAR), needs power supply/DC and AC line if necessary</li> </ul>	Connection cable (male connector-female connector)	2116705
	<ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, D-Sub, 9-pin, straight</li> <li><b>Connection type head B:</b> Male connector, RJ45</li> <li><b>Signal type:</b> RS-232 TTL</li> <li><b>Cable:</b> 2.8 m, coiled cable</li> <li><b>Description:</b> RS-232 TTL, Voltage supply via pin 9, RS232 TTL, (Zebra CBA-R71-C09ZAR)</li> </ul>	Connection cable (male connector-female connector)	2116717

	Brief description	Type	Part no.
	<ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Male connector, USB-A</li> <li>• <b>Connection type head B:</b> Male connector, RJ45</li> <li>• <b>Signal type:</b> USB</li> <li>• <b>Cable:</b> 2 m, straightened cable</li> <li>• <b>Description:</b> USB, for keyboard connector or USB Com Port Emulation, 5 V Host Power shielded (Zebra CBA-U46-S07ZAR), USB</li> </ul>	Connection cable (male connector-male connector)	2116701
	<ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Male connector, USB-A</li> <li>• <b>Connection type head B:</b> Male connector, RJ45</li> <li>• <b>Signal type:</b> USB</li> <li>• <b>Cable:</b> 2.8 m, straightened cable</li> <li>• <b>Description:</b> USB, for keyboard connector or USB Com Port Emulation, 5 V Host Power, with power socket for 12 V power supply, shielded (Zebra CBA-U42-S07PAR), USB, needs power supply/DC- and AC cable</li> </ul>	Connection cable (male connector-male connector)	2116703
	AC power cable with EU male connector	Power cable	6048006
	DC cable for power supply (#6074455, Zebra PWRBGA12V50W0WW) for use with ZS36xx (Zebra CBL-DC-451A1-01)	Power cable	2116720
	Power supply for ZS36xx, battery charger, EA 3600 module (Zebra PWRB-GA12V50W0WW), requires DC and AC line	Power supply unit	4108973

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)