

Non-return valve, Series QR1-SKR

R432000433

Series QR1

- $Q_n = 280 \dots 2000 \text{ l/min}$





Technical data

Industry	Industrial
Compressed air connection 1	Ø5/32
Compressed air connection type 1	push-in fitting
Compressed air connection type 2	push-in fitting
Type	Poppet valve
Compressed air connection 2	Ø5/32
Nominal flow Qn 1 to 2	280 l/min
Working pressure min.	0.8 bar
Working pressure max	10 bar
Min. ambient temperature	0 °C
Max. ambient temperature	60 °C
Min. medium temperature	0 °C
Max. medium temperature	60 °C
Delivery unit	5 piece
Weight	0.0004 kg

Material

Housing material

Polybutyleneterephthalate


Seal material

Acrylonitrile butadiene rubber

Part No.

R432000433

Dimensions in inches

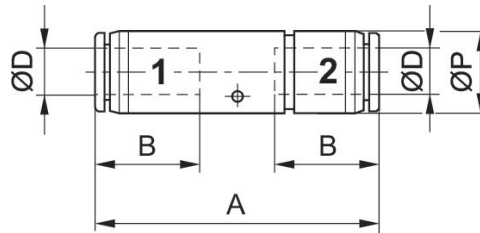

Part No.	Ø D	Ø D	A	B	Ø P
R432000433	Ø5/32	Ø5/32	1.407	0.63	0.394
R432000430	Ø1/4	Ø1/4	1.639	0.67	0.489
R432000432	Ø5/16	Ø5/16	2.033	0.729	0.567
R432000431	Ø 3/8	Ø 3/8	3.046	0.827	0.985
R432000429	Ø1/2	Ø1/2	3.152	0.887	0.985