


5/2-directional valve, Series 581, size 3

5813292530

ISO 5599-1, size 3, series 581

- $Q_n = 4100 \dots 4800$ l/min

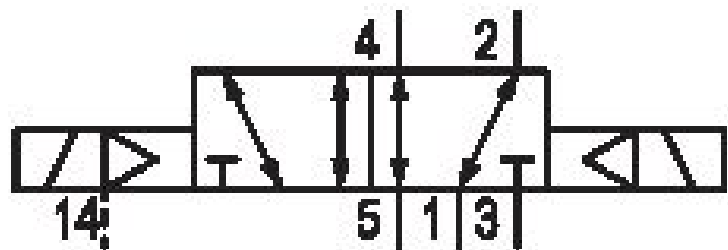

Technical data

Industry

Industrial

Activation

Electrically

Nominal flow Q_n

4800 l/min

Switching principle

5/2

Compressed air connection output

Base plate ISO 5599-1

Working pressure min.

-0.95 bar

Working pressure max

16 bar

DC operating voltage

24 V

Voltage tolerance DC

-10% / +10%

Voltage tolerance AC 50 Hz

-10% / +10%

Manual override

without

Electrical connection type

Plug

Electrical connection size

EN 175301-803, form A

Actuating control

Double Solenoid

Sealing principle Soft Seal	Min. medium temperature -15 °C
Pilot External	Max. medium temperature 50 °C
Standards ISO 5599-1	Medium Compressed air
Pilot valve width 30x22 mm CNOMO	Max. particle size 50 µm
Valve type Spool valve	Oil content of compressed air min. 0 mg/m ³
Blocking principle Single base plate principle	Oil content of compressed air max. 5 mg/m ³
Connection type Plate connection	Protection class with connection IP65
Compressed air connection input Base plate ISO 5599-1	Duty cycle 100 %
Compressed air connection, exhaust Base plate ISO 5599-1	Typ. switch-on time 18 ms
Compressed air connection pilot exhaust M5	Typ. switch-off time 18 ms
Power consumption DC 6.7 W	mounting screws with hexagon socket
Flow conductance C 18.9 l/(s*bar)	Mounting screw tightening torque 10 Nm
Frame size ISO 3	Weight 1.14 kg
Control pressure min. 1.5 bar	Housing material Aluminum
Control pressure max. 16 bar	Seal material Acrylonitrile butadiene rubber
Min. ambient temperature -15 °C	Part No. 5813292530
Max. ambient temperature 50 °C	

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

Dimensions

